

Stealthbox®

INSTALLATION GUIDE for the

SB-T-TUNDC/8W7
2007-Up Toyota Tundra Double Cab
will not fit the Tundra Crew Max



Thank you for choosing a JL Audio Stealthbox® for your automotive sound system. With proper installation, your new vehicle-specific enclosed subwoofer system will deliver years of listening pleasure.

We strongly recommend that you have your new Stealthbox® installed by your authorized JL Audio dealer. The installation professionals employed by your dealer have the necessary tools and experience to disassemble and reassemble your vehicle properly. Also, keep in mind that your warranty coverage extends to 2 years if your system is installed or approved by your authorized JL Audio dealer. If you prefer to perform your own installation, please read this installation guide completely before beginning the process.

JL AUDIO®
Ahead of the Curve™

! IMPORTANT

If you choose to perform the installation yourself, it is absolutely vital that the Stealthbox® be properly mounted to the vehicle according to these instructions. Failure to mount the enclosure properly presents two problems:

- 1) The sub-bass performance will suffer due to the movement of the enclosure caused by the force exerted by the woofer(s).
- 2) A loose enclosure presents a serious safety hazard in the event of a collision or sudden deceleration.

INSTALLATION DIFFICULTY:

1 OUT OF 5

ESTIMATED TIME:
1 HOUR



STEP 1

Remove any contents from the rear seats.




STEP 2

Flip up the driver's side rear bottom cushion.



STEP 3

Remove the two bolts that secure the mounting foot to the rear bulkhead and floor.

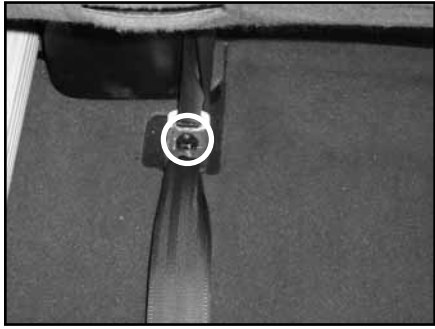


STEP 4
Remove the bolt that secures the seat belts to the floor.



STEP 5
Place a supplied lock washer and then flat washer onto each supplied hex bolt.

Place a supplied L-bracket onto each bolt assembly. The bolt assembly is to pass through the hole on the longer side of each L-bracket.

Secure a L-bracket to the left side of the Stealthbox®.

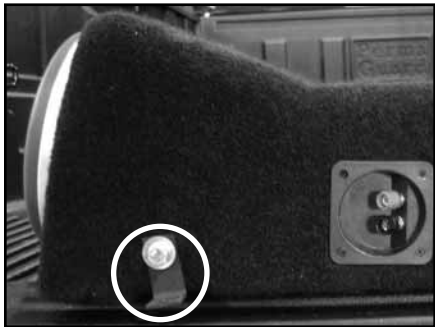

STEP 6
Secure the other L-bracket to the right side of the Stealthbox®.



STEP 7
Run speaker wire from the amplifier's location to the Stealthbox® location and check for proper operation of the woofer.



STEP 8
Place the Stealthbox® into the mounting area.



STEP 9
Lift the rear seating up and slide the Stealthbox® under the seating. The woofer and port faces the rear of the truck.

When placing the rear seat back down. Make sure that the hooks that are located on the backside of the seat is aligned with the hooks on the rear wall. If these hooks do not align, then the rear seating will not function correctly.



STEP 10
Using the factory bolt that was removed in **STEP 3**, secure the rear seat mount to the bulkhead.



STEP 11
Using the factory bolt that was removed in **STEP 3**, secure the L-bracket and the rear seat mount to the floor.



STEP 12

Using the factory bolt that was removed in **STEP 4**, secure the L-bracket and the seat belts' mount to the floor.



STEP 13

Lower the rear seat and replace any removed contents.



CONGRATULATIONS

You have completed the installation for this model!

Please refer to the Power Recommendation section for an amplifier recommendation and basic set-up help.

INCLUDED HARDWARE


- (2) 3/8-inch -16 x 1-inch Hex Bolt
- (2) 3/8-inch Split Lock Washer
- (2) 3/8-inch Flat Washer
- (2) L-Bracket

SPECIFICATIONS

Enclosure Type: Bass Reflex (ported)
Driver Type: 8W7
Nominal Impedance: 3 ohms mono
Continuous Power Handling: 300 Watts

POWER RECOMMENDATION

JL Audio recommends using a high quality amplifier such as the JL Audio 250/1v2. The diagram below shows the recommended crossover, infrasonic filter and equalizer settings for the 250/1v2 when being used to power your Stealthbox®.

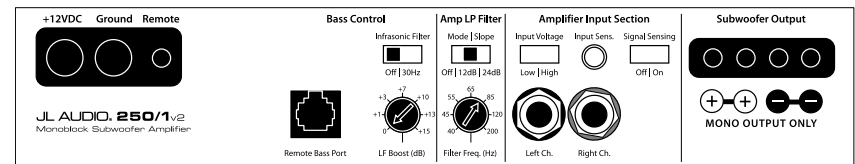

The JL Audio 250/1v2 is a very versatile audio component. Please consult the owner's manual for even more detailed information about installing and tuning this amplifier.

MID/HIGH FREQUENCY DRIVER FITMENT

A variety of JL Audio coaxial and component systems will fit in the factory speaker locations of your vehicle.

Front Speaker Size / Location: 6-inch x 9-inch / Front Doors
Fits JL Audio Models:** *TR690-TXi & *VR690-CXi



Rear Speaker Size / Location: 6.5-inch / Rear Doors
Fits JL Audio Models: *TR650-CXi, *TR650-CSi, *VR650-CXi, *VR650-CSi, *XR650-CXi, XR650-CSi, *C5-650x, *C5-650 & *ZR650-CSi

*Spacer ring is required for proper mounting.
 **Other size speakers may be used, custom mounting ring is required.

JL AUDIO®
Ahead of the Curve™

(954) 443-1100

www.jlaudio.com

All specifications are subject to change without notice. "JL Audio" and the JL Audio logo, "Stealthbox" and the Stealthbox logo are registered trademarks of JL Audio, Inc. "Ahead of the Curve" and its respective logo is a trademark of JL Audio, Inc.
JL-AKU#011247-09-11-2007 • Printed in USA • ©2007 JL Audio, Inc. • U.S. PATENTS: #5,734,734 #5,949,898 #6,118,884 #6,229,902 #6,243,479 #6,294,959 #6,501,844 #6,496,590 #6,441,685 #5,687,247 #6,219,431 #6,625,292 #D472,891 #D480,709 Other U.S. & Foreign patents pending. For more detailed information please visit us online at www.jlaudio.com.



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>