


Explorer 100 Series – TX716A – POCKET TRANSMITTER - Quick User Guide

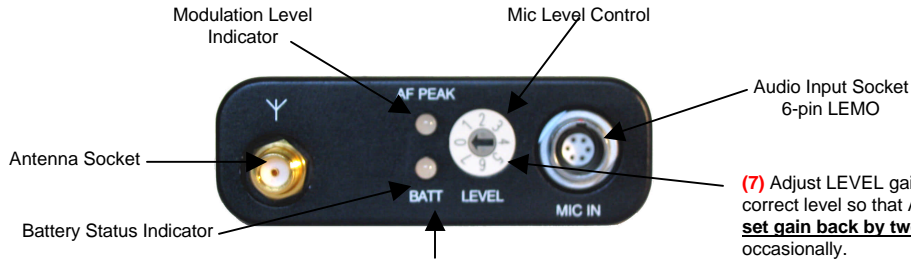

(7) Adjust LEVEL gain control, while the performer speaks at correct level so that AF Peak LED comes on all the time, then **set gain back by two notches** at which AF Peak LED flashes occasionally.

(4) Switch on TX (by connecting microphone cable to 6-pin LEMO socket)

(5) Check TX battery status LED, if RED replace battery with a new one



Setting Up Procedure:

(1) Connect provided TX antenna (Screw-on SMA antenna)


(3) Set your TX frequency same as RX
please note: to change frequency turn unit on/off

(6) Check RX 'Active' Received Signal Strength Indicators – a LED should be GREEN

(8) NOW YOUR SYSTEM IS READY TO USE.

(2) Fit a PP3 9V battery, check RX battery status LED
Please watch polarity of battery.

The battery compartment is opened by pressing the button on the back of the unit. There is a slot for the 9V battery to fit into.

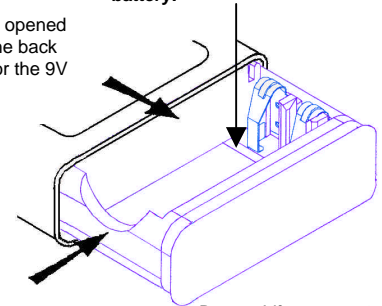

The battery can easily be released with the aid of the thumb.

Battery Life approx. 6 hours

MICRON
by Audio Engineering

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>