




Module Adapter Kit Model MA3

Installation and Use Manual

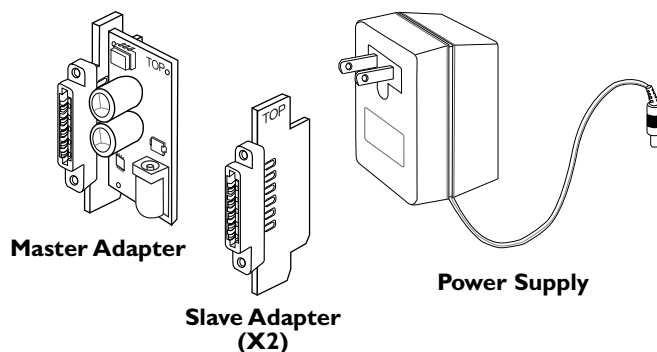

Description

The MA3 Module Adapter Kit allows Bogen's latest line of input modules to work with the D-Series line of amplifiers (Models DMA40, DMA80, DMA160, DMP06, and DPA160). One MA3 kit can adapt up to 3 modules in a single D-Series amplifier. Two MA3 kits can be used in the same D-Series amplifier to adapt up to 6 modules.

Note: Signal-processing output modules are not compatible with the D-Series line of amplifiers.

Installation

Master Adapter

A master adapter must always be installed, but the two slave adapters are optional and may be installed on an as needed basis.

1. Connect the power supply to the adapter. Wire tie the power supply cord to the connector if desired.
2. Connect the module to the adapter and slide the power supply cord below the module.
3. Insert the two screws supplied with the module through the module screw holes and then through the two washers, with the larger washer first and the smaller retaining washer second. Then, insert the module and adapter into the module bay by sliding them along the card guides inside the module bays. Secure them to the chassis using the two screws. A gap between the unit's back panel and the module will exist to allow the power supply wire to exit.


Slave Board

Once the master module adapter is installed, the slave adapters can be installed if needed. Slave adapters will not work without a master adapter.

1. Connect the module to the adapter.
2. Insert the module and adapter into the module bay by sliding them along the card guides inside the module bays. Use the two screws supplied with the module to secure it to the chassis. No washers are used and the module should be flush with the unit's back panel.

Package Contents

- Master Board
- 2 Slave Boards
- Power Supply
- Wire Tie
- 2 Washers (large)
- 2 Washers (small retaining)

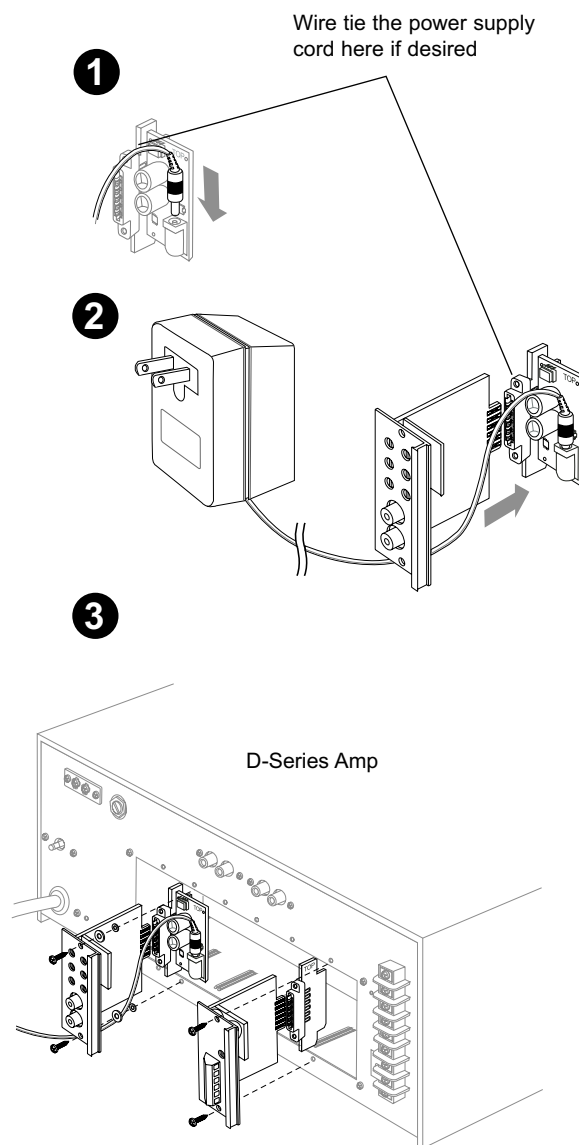

Limited Warranty

The MA3 is warranted to be free from defects in material or workmanship for two (2) years from the date of sale to the original purchaser. Any part of the product covered by this warranty that, with normal installation and use, becomes defective will be repaired or replaced by Bogen, at our option, provided the product is shipped insured and prepaid to: Bogen Factory Service Department, 50 Spring Street, Ramsey, NJ 07446, USA. The product will be returned to you freight prepaid. This warranty does not extend to any of our products that have been subjected to abuse, misuse, improper storage, neglect, accident, improper installation or have been modified or repaired or altered in any manner whatsoever, or where the serial number or date code has been removed or defaced.

THE FOREGOING LIMITED WARRANTY IS BOGEN'S SOLE AND EXCLUSIVE WARRANTY AND THE PURCHASER'S SOLE AND EXCLUSIVE REMEDY. BOGEN MAKES NO OTHER WARRANTIES OF ANY KIND, EITHER EXPRESS OR IMPLIED, AND ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE HEREBY DISCLAIMED AND EXCLUDED TO THE MAXIMUM EXTENT ALLOWABLE BY LAW. Bogen's liability arising out of the manufacture, sale or supplying of products or their use or disposition, whether based upon warranty, contract, tort or otherwise, shall be limited to the price of the product. In no event shall Bogen be liable for special, incidental or consequential damages (including, but not limited to, loss of profits, loss of data or loss of use damages) arising out of the manufacture, sale or supplying of products, even if Bogen has been advised of the possibility of such damages or losses. Some States do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from State to State.

Products that are out of warranty will also be repaired by the Bogen Factory Service Department -- same address as above or call 201-934-8500. The parts and labor involved in these repairs are warranted for 90 days when repaired by the Bogen Factory Service Department. All shipping charges in addition to parts and labor charges will be at the owner's expense. All returns require a Return Authorization number.

07/20/2004

BOGEN[®]
COMMUNICATIONS, INC.

50 Spring Street, Ramsey, NJ 07446, U.S.A.

Tel. 201-934-8500, Fax: 201-934-9832, www.bogen.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>