

Quad DM Output Card w/HDMI for DM Switchers

The DMC-CATO-HD is an output card for a Crestron DigitalMedia™ Switcher, providing four DigitalMedia (DM) outputs to feed up to four individual DM receivers via CAT5e/6 or DigitalMedia cable*.

The DMC-CATO-HD also provides two local HDMI outputs, configured in parallel with DM Outputs #1 and #3. Each HDMI output carries the same audio and video signals as its companion DM output, perfect for feeding a centralized audio processor and remote display device simultaneously.

SPECIFICATIONS

Connectors

DM 1 – 4: (4) DM outputs, each composed of (2) 8-pin RJ45 female;
Connect to DM inputs of DM receivers or other DM devices via DM-CBL or CresCAT-D cable*
HDMI 1, 3: (2) 19-pin Type A HDMI female;


Construction

Plug-in card, occupies (1) DM Switcher output card slot, includes steel faceplate w/black matte powder coat finish

Weight

11.5 oz (326 g)

* For DigitalMedia wiring, use DM-CBL DigitalMedia Cable, CresCAT-D, or quality CAT5e/CAT6 cable. Do NOT use low-skew cable. The maximum allowable cable length depends on multiple factors. One or more DM Repeaters (Model DM-DR) may be required. Refer to the Crestron DigitalMedia Design Guide, Doc. #4789 for complete wiring guidelines.

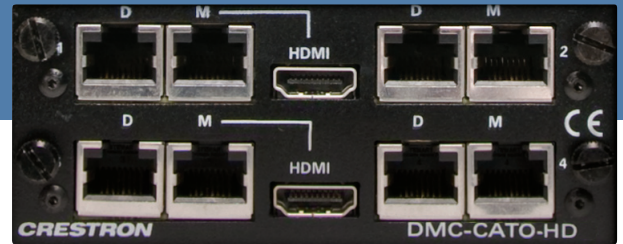

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>