

Framing Nailers SN60 • SN65 • SN65C

Pneumatically driven true round head framing nailers for manufactured housing, on-site building construction, and pallet assembly. The SN65C has been designed for earthquake, hurricane, and tornado-prone areas, where codes call for common nails.


The SENCOR[®] SN60, SN65, and SN65C drive a wide range of full round head nails for a variety of tool applications. Excellent balance and power-to-weight ratio, along with a comfort-grip handle, helps reduce fatigue and increase productivity. Built to exceed SENCOR's proven standard of reliability, the SN60, SN65, and SN65C provide high-quality performance through our depth-of-drive control which allows the user to achieve the right countersink. Toenail safety, no-mar pad, and the angled magazine increase flexibility for nail placement.

Applications:

Manufactured Housing, On-site and Mobile Home Construction:

- Framing
- Subflooring
- Sidewall sheathing
- Decking construction
- Siding
- Roof deck construction
- Truss building

Also for Crate, Box, and Pallet Assembly

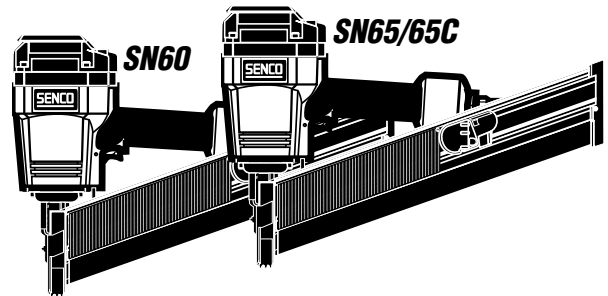

Features:

- Drives a wide range of true round head framing nails.
- The SN65C drives 2½", 3", and 3 ½" common nails.
- Reduces fatigue through excellent balance and power-to-weight ratio, as well as a comfort-grip handle.
- Toenail safety, streamlined nose area, and angled magazine aid in nail placement.
- Depth-of-drive control and standard no-mar pad attachment improves craftsmanship by ensuring the right countersink while keeping the work surface mar-free when necessary.
- EZ-Clear design allows quick clearing of infrequent nail jams.
- Two-step rear loading makes loading quicker and easier, for right-handed or left-handed users.
- SN65's have 15% more power than SN60 for those extra-tough jobs.



Framing Nailers SN60 • SN65 • SN65C


Tool Specifications:

Tool Weight: SN60: 7.7 lbs. (3.5 kg)
 SN65's: 8.1 lbs. (3.7 kg)
Height: SN60: 13" (330 mm)
 SN65's: 13 5/8" (346 mm)
Length: 19 3/4" (502 mm)
Lip Length: 3/8" (10 mm)
Magazine Capacity: 60
Operating Pressure: 70-120 psig (4.8 - 8.3 bar)
Mode of Operation: Tools are available with either "Restrictive Trigger" or "Dual Action" activating mechanism. **
Hose Fitting: 3/8" (10mm)



Fastener Specifications:

Drive full round-head framing nails, ranging from 2" 3 1/2" in length (50 - 90 mm)

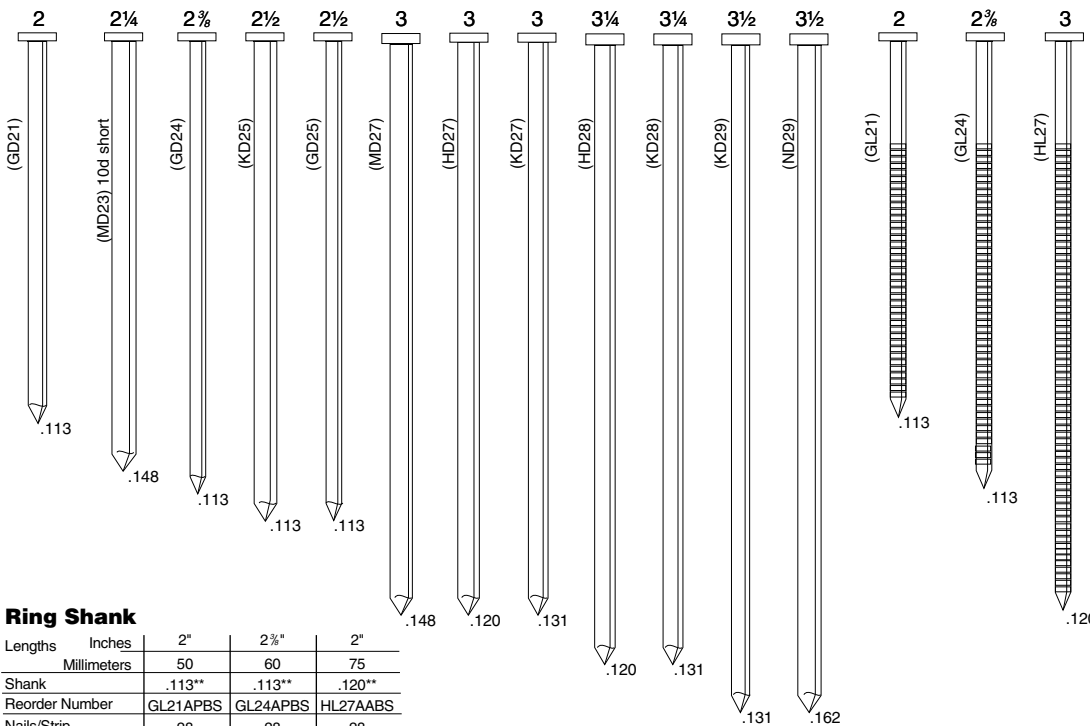

SENCNO round head nails are designed to provide maximum fastening performance in partnership with the SN60, SN65, and SN65C. These quality nails are made to specs that meet codes and industry or manufacturer requirements. Check your SENCNO rep or Authorized Dealer regarding availability of galvanized and Bright Basic nails.

* "Restrictive Trigger" activated tools are used for applications where precision nail or staple placement is desired. You must first depress the safety element where you want to drive a nail or staple and then pull the trigger. After each nail or staple is driven, completely release the trigger and lift the tool off the work surface.

"Dual Action" activated tools are used for applications where high-production work is desired. There are two modes of operation:
 1. Bottom Fire Method: This method of operation is sometimes called bounce firing. You must keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element where you want to drive a nail or staple.

2. Trigger Fire Method: First depress the safety element where you want to drive a nail or staple and then pull the trigger.
 For instructions on safe use of tools with either of these activating mechanisms, please refer to the Operating Instructions or Customer Satisfaction and Safety Reminder contained in your tool carton.

Ring Shank

Lengths	Inches	2"	2 3/8"	2"
	Millimeters	50	60	75
Shank		.113**	.113**	.120**
Reorder Number		GL21APBS	GL24APBS	HL27AABS
Nails/Strip		28	28	28

Smooth Shank

Lengths	Inches	2"	2 1/4"	2 3/8"	2 1/2"	2 3/4"	3"	3"	3"	3 1/4"	3 1/4"	3 1/2"	3 1/2"
	Millimeters	50	55	60	65	65	75	75	75	85	85	90	90
Shank		.113**	.148**	.113**	.113**	.113*	.120**	.131**	.148**	.120**	.131**	.131**	.162**
Reorder Number		GD21APBS	MD23APBS	GD24APBS	GD25APBS	KD25APBS	HD27APBS	KD27APBS	MD27APBS	HD28APBS	KD28APBS	KD29APBS	ND29APBS
Nails/Strip		28	28	28	28	28	28	28	28	28	28	28	28

**Dimensions shown may be converted to metric on basis of 1" = 25.40 millimeters (mm) rounded to the nearest 5 mm.

Note: The 2" GD21APBS smooth shank is for the SN60 and SN65 only.
 The 3" MD27APBS and the 3 1/2" ND29APBS smooth shank is for the SN65C only.
 The 2" GL21APBS ring shank is for the SN60 only.

For additional information on how Senco fastening systems will save you time, reduce costs, and increase quality, call your nearest Authorized Senco Dealer or Distributor listed in the Yellow Pages under "Staples," or call our toll-free Action Line: 1-800-543-4596.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>