



Capable of driving all SENCOR DuraSpin® screws from 1-5/8" – 3" in length, this tool is ideal for wood screw applications. The SENCOR DuraSpin DS300-S2 collated screw system comes conveniently assembled to a rugged 2500 rpm SENCOR screwdriver. The DS300-S2 comes complete with the DuraSpin collated screw feed system mounted on a screwdriver, a flooring extension, a rugged carrying case and two spare bits.

Applications:

Ideal for driving screws from 1-5/8" – 3" in length for exterior decking, floor sheathing and other wood-to-wood or wood-to-steel applications.

Features and Benefits:

- Patented SENCOR DuraSpin feed system drives screws quickly and efficiently without jams or misfeeds.
- Ergonomic design – May be used with a one-handed or two-handed grip. Cushioned second hand grip provides added comfort and reduced exertion.
- Flooring extension included – Allows screws to be driven efficiently from a comfortable standing position.
- Easy Depth-of-Drive Adjustment – Just turn the thumb screw to regulate the precise amount of countersink.
- Quick Release – Feed system snaps off to give easy bit access.
- Adjustable Nose Piece – Easily adjusts for screw sizes from 1-5/8" – 3" (41 mm – 75 mm).
- Super-Tough Drive Bits – Outlast the competition.
- SENCOR's Full One-Year Warranty.
- Modular design – Snaps together with or without flooring extension, quickly and easily, with no tools.

Tool Specifications:

Model #: DS300-S2

Item Code: 790024N

RPM: 2500 rpm

Current: 5.4 amps

Without Extension

With Extension

Weight:

5.5 lbs (2.5 kg)

7.5 lbs (3.4 kg)

Height: 9.25" (234 mm)

Length:

20.5" (520 mm)

40" (1015 mm)

Width: 2.75" (70 mm)


Fastener Capacity: 50 screws (per strip)

Fastener Specifications: (see reverse side)

Screw Lengths: 1-5/8" – 3" (41 mm – 75 mm)

Screw Diameters: #6 – #10



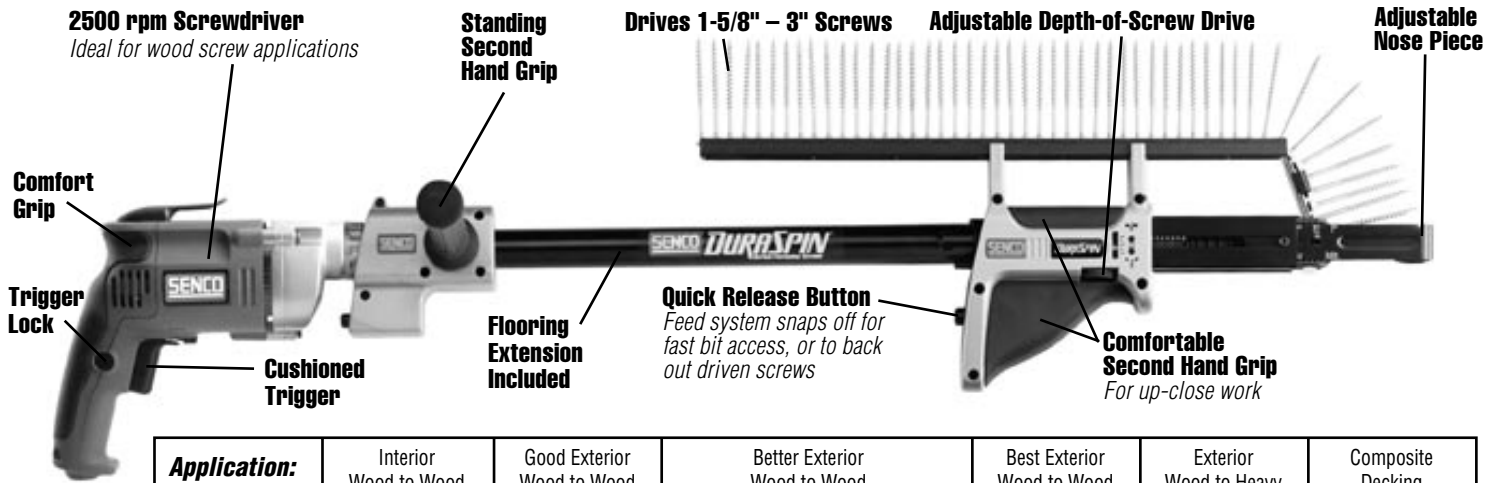

| Application: | Interior Wood to Wood | Good Exterior Wood to Wood (Decking) | Better Exterior Wood to Wood (Decking) | | Best Exterior Wood to Wood (Decking) | Exterior Wood to Heavy Steel | Composite Decking |
|--------------------|---|--|--|--|--------------------------------------|--|------------------------------------|
| Screw: | #6X 1 5/8" #8X 1 3/4" #8X 2" #10X 2" #8X 2 1/2" #8X 3" | #8X 1 3/4" #8X 2" #8X 2 1/2" #8X 3" | #6X 1 5/8" | #8X 1 3/4" #8X 2" #8X 2 1/2" #8X 3" | #8X 2 1/2" #8X 3" | #8X 1 3/4" #8X 2" #8X 2 1/2" | #8X 2" #8X 2 1/2" #9X 3" |
| Drive/Head: | #2 Square Flat | #2 Square Flat | #2 Phillips Bugle | #2 Square Flat | #2 Square Flat | #2 Square Flat | #2 Square Modified Trim |
| Thread: | Coarse 2/3 with Wax | Coarse 2/3 with Wax | Coarse | Coarse 2/3 with Wax | Coarse 2/3 with Wax | Fine | Coarse 2/3 with Wax |
| Point: | Sharp | Type 17 (Cut) | Sharp | Type 17 (Cut) | Type 17 (Cut) | Self-Drilling with Wings | Type 17 (Cut) |
| Finish: | Yellow Zinc (Minimal Rust Protection) | Silver Kylan* | Weatherex II** | | Stainless Steel | Silver Kylan* | Stainless Steel |

*Provides corrosion resistance in excess of 1,000 hours in salt spray (in accordance with ASTM-B117-94).

**Provides corrosion resistance in excess of 1,000 hours in salt spray (per ASTM-B117-94) and meets requirements of ASTM-B633, Type II Severe Condition (SC3). Equivalent to ASTM-A641 "Type 1" galvanization.

For additional information on how Senco Fastening Solutions will save you time, reduce costs and increase quality, call for a Dealer or Distributor close to you. Senco Action Line: 1-800-543-4596. Or visit our web site: www.senco.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>