

MKE *platinum*-4-C

Microphones | Back-Electret Condenser Microphone

Cat. No. 005276

General Description

The MKE *platinum* is a high-quality, sweat-resistant, sub-miniature clip-on microphone designed for all areas of live work. It features excellent sound quality and rugged design. The frequency response curve has been optimised for live stage work, with more headroom in the treble for higher levels and improved feedback rejection. The MKE *platinum* is fitted with a very thin (only 1 mm) yet rugged cable, making this microphone an ideal partner for all live sound applications.



Features

- Umbrella Diaphragm™ protects the mic against sweat
- Versatile attachment due to an extensive range of accessories
- High maximum sound pressure level
- Treble response adapted to the requirements of live stage work
- Thin (only 1 mm), flexible and rugged cable, low in handling noise
- Delivery includes: 1 MKE *platinum*-4-C clip-on microphone, 1 MZC 2-1 cap (short), 1 MZC 2-2 cap (long) (for altering the frequency response curve)

Recommended Accessories


- MZ 2-1 Gold accessory set Cat. No. 004741
 consisting of: 2 MZW 2 (black and beige)
 2 MZQ 02 (black and beige)
 2 ZH 102 (anthracite and beige)
 1 MZW 102
 1 carrying case
- MZ 2-2 Gold accessory set Cat. No. 004742
 consisting of: 5 MZC 2-1 (black and beige)
 5 MZC 2-2 (black and beige)
- MZ 2-3 Gold accessory set Cat. No. 004743
 consisting of 10 make-up protection caps
- MZM 2/MZM 10 magnetic mount set Cat. No. 001866

Product Variants

- MKE *platinum*-4-3-C: as MKE *platinum*-4-C, but beige Cat. No. 005277
- MKE *platinum*-5-C: with open-ended cable, cable length 4 m, 5 mV/Pa ± 2.5 dB, black Cat. No. 005303
- MKE *platinum*-5-3-C: as MKE *platinum*-5-C, but beige Cat. No. 005304

Technical Data

Pick-up pattern omni-directional
 Frequency response 20 – 20,000 Hz ± 3 dB
 Sensitivity
 (free field, no load) (1 kHz) 6.3 mV/Pa ± 2.5 dB
 Nominal impedance 1 kΩ
 Min. terminating impedance 4.7 kΩ
 Equivalent noise level
 A-weighted (DIN IEC 651) 26 dB
 CCIR-weighted (CCIR 468-3) 39 dB
 Max. SPL (1 kHz) 140 dB (THD = 1 %)
 Power supply 18 kΩ/7.5 V
 Supply current approx. 250 μA
 Connector 3-pin audio connector for SK 50/SK 250/SK 5012
 Cable length 1.6 m
 Dimensions Ø 4.8 mm
 Weight 1 g

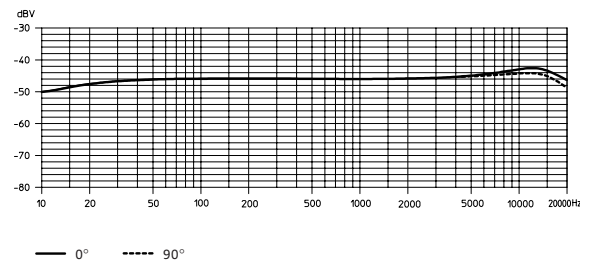

MZW 2	MZQ 02	ZH 102	MZM 2 MZM 10
anthracite nickel	anthracite nickel	anthracite beige	grey

MZW 102	MZC 2-1	MZC 2-2	Make-up Protection Cap
	black beige	black beige	red

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>