

6-Year Limited Tank/ 6-Year Limited Parts Warranty*

American 80 and 120-gallon indirect solar booster water heaters are specially designed for installation as part of a closed loop solar water heating system. They provide an energy-efficient supplementary source of water heating power and hot water storage to help maintain consistent water temperature during periods when the solar components cannot keep up with system demands. Count on American for products that provide hot water solutions for residential renewable-energy applications.

FEATURES

Internal Heat Exchanger

- Single wall internal heat exchange coil for the most efficient heat transfer from solar panels
- Suitable for propylene glycol heat transfer fluid with corrosion inhibitor

Long-Lasting Low-Watt Density Copper Heating Element

- Low-watt density design spreads wattage over larger surface area to prolong element life and help maximize energy-efficiency
- Prewired for surface mount temperature sensor (sensor supplied separately)

2 Inch-Thick Environmentally Friendly Non-CFC Foam Insulation For High Energy-Efficiency

Glass Tank Coating

- Glass lining helps maximize tank life against corrosion and buildup

Diffuser Dip Tube

- Helps reduce lime and sediment buildup to maximize hot water output
- Made from long-lasting PEX cross-linked polymer

Two Anode Rods

- Primary and secondary magnesium anodes with stainless steel core protect tank against corrosion longer than ordinary anodes

Factory Installed CSA Certified and ASME Rated T&P Relief Valve

Durable Tamper-Resistant Brass Drain Valve

Pex-Lined, Heat Trap Nipples for Efficiency

Codes and Standards

- Complies with current editions of: UL Standard for Household Electric Storage Tank Water Heaters, UL 174; Packaged Solar Domestic Hot Water Systems (Liquid-to-Liquid Heat Transfer) For All-Season Use, F379.1-09; Packaged Solar Domestic Hot Water Systems for Seasonal Use, F379.2-09 and ICC Codes and HUD Standards



**SSX62-80H-045S and
SSX62-119H-045S**




Qualifies for
Federal Tax credit
of 30%
of the project cost.

*For complete warranty information consult the written warranty of American Water Heaters found at www.americanwaterheater.com, or call (800) 456-9805.

MODEL NUMBER	GALLON CAPACITY	ELEMENT WATTAGE (240 VOLT)	RECOVERY 90° RISE GALLONS PER HOUR	NUMBER OF ELEMENTS	FOAM THICKNESS (INCHES)	DIMENSIONS IN INCHES				APPROX. SHIPPING WEIGHT (LBS)
						HEIGHT	DIAMETER	A	B	
SSX62-80H-045S	76	4500	21	1	2	63-1/4	24	5-3/8	30-1/8	257
SSX62-119H-045S	108	4500	21	1	2	63-1/4	28	5-3/8	26-1/2	365

All dimension in inches.
 Recovery capacity based on element performance.
 Working Pressure = 150 PSI

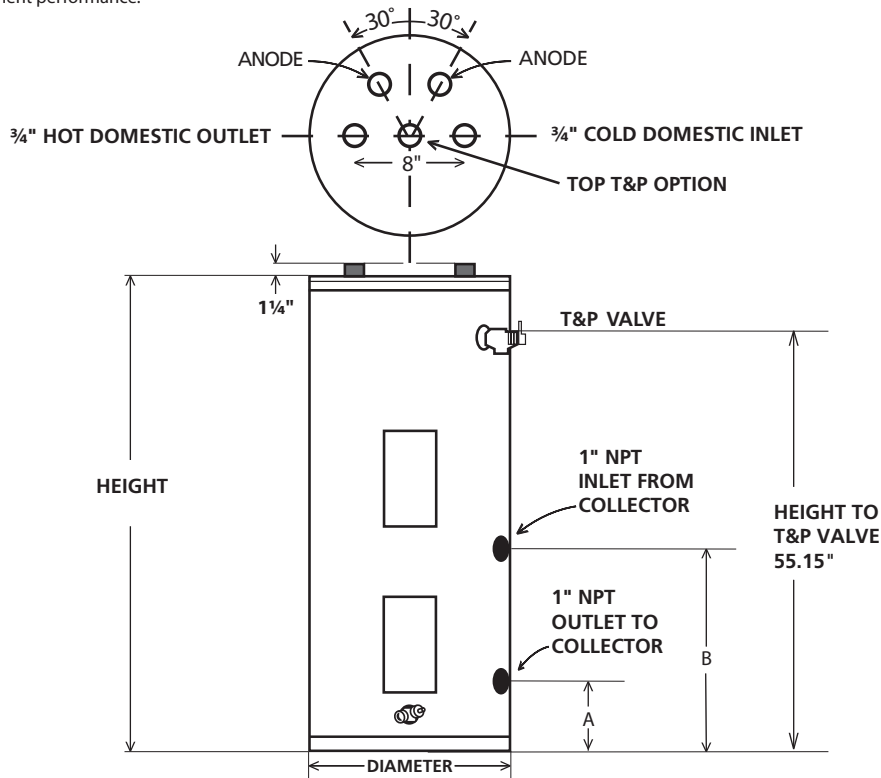

HEAT EXCHANGE COIL DATA

MODEL NUMBER	TUBE I.D. (INCHES)	TOTAL SURFACE AREA (SQ. FT)	COIL CAPACITY (GALLONS)	TUBE LENGTH (FT)
SSX62-80H-045S	1.3	16	2.8	40.8
SSX62-119H-045S	1.55	18.8	4	41

Heat exchanger must only be used with a propylene glycol heat transfer fluid containing corrosion inhibitors such as Dowfrost™ HD
 Working Pressure = 150 PSI

FLOW RATE (GPM)	PRESSURE DROP THROUGH COIL (FEET OF H ₂ O)	
	HEAD LOSS (FEET)	
	SSX62-80H-045S	SSX62-119H-045S
2	0.1	0.05
4	0.3	0.15
6	0.5	0.25

Distributed By:

Order Entry and Sales

500 Princeton Road (FEDEX, UPS)
 Johnson City, TN 37601-2030
 P.O. Box 4808 (Mailing)
 Johnson City, TN 37602-4808
 (800) 937-1037
 FAX (800) 581-7224

Warranty and Service

500 Princeton Road (FEDEX, UPS)
 Johnson City, TN 37601-2030
 P.O. Box 1597 (Mailing)
 Johnson City, TN 37605-1597
 (800) 456-9805
 FAX (800) 999-5210

NRQSS00110

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>