



Project: _____
 Location: _____
 Item #: _____
 Quantity: _____

Extra-High Roll-in Freezers

FIS MODELS —

Stainless steel exterior and interior.

FIS-1D-S7-XH
FIS-2D-S7-XH
FIS-3D-S7-XH

FISA MODELS —

Stainless steel exterior.
 Aluminum interior.

FISA-1D-S7-XH
FISA-2D-S7-XH
FISA-3D-S7-XH

FIA MODELS —

Stainless steel fronts and doors. Aluminum sides and interior.

FIA-1D-S7-XH
FIA-2D-S7-XH

Roll-Thru and Remote Models Available



FISA-2D-S7-XH

Cabinet:

Each Victory cabinet is internally supported, braced and assembled into a single rigid unit. The cabinet front and doors are constructed of heavy gauge polished stainless steel to maintain an attractive appearance after years of heavy use. Foamed-in-place polyurethane insulation throughout the cabinet and doors ensures the ultimate in energy efficiency.

Doors:

The self-closing doors are securely mounted on rugged cam-lift hinges, which have a lifetime guarantee. Each door has a heavy-duty cylinder lock and self-adjusting magnetic gasket to prevent the cold air from escaping. Humidity control wires located around the door jamb prevent condensation from forming on the cabinet front and are concealed by a high impact, non-conductive thermal breaker strip. The interior door liner is constructed of durable ABS material, which resists denting and scratching and is

easy to clean. Each safety grip handle is guaranteed for life. Removable ramps are provided on the bottom of each door opening.

Refrigeration System:

All components of the self-contained refrigeration system are mounted on top of the cabinet. The air circulating fans and the forced convection-cooling coil are contained in an insulated housing separate from the product zone allowing for maximum food storage capacity. All condensate water is disposed of automatically by the energy efficient non-electric condensate evaporator, no plumbing is required.

FIS and FISA Models

- Digital Thermometer/Battery Back-up

FIA Models

- Dial Thermometer

Standard Features (all models)

- Energy Saver Switch
- Stainless Steel Case Front and Door(s)
- Lifetime Heavy-Duty Cam Lift Hinges
- Lifetime Safety Grip Handle(s)
- Self-Closing Doors with Safety Stops
- Adjustable Wiper Gasket(s)
- Removable Ramps(s)
- Energy Saving Thermal Breaker Strips
- Door Opening Accepts Carts up to 27" w x 29" d x 72 1/2" h
- Heavy-Duty Cylinder Locks
- One Piece Self-Adjusting Magnetic Door Gaskets
- High Impact ABS Interior Door Liner
- Plasticized Fin Coil
- Environmentally Friendly R-404A Refrigerant
- Non-Electric Condensate Evaporator
- Automatic Defrost
- Stainless Steel Floor
- Cord and Plug Attached on 115V Models 12 Amps or Less

Optional Features and Accessories

- Dial or Digital Thermometer
- Change Door Swing
- Shelf Pilaster Strips
- Adjustable Stainless Steel Wire Shelves
- Stainless Steel Angle Pan Slides
- Zinc Plated Wire Pan Slides
- Stainless Steel Case Back
- Remote and Roll-Thru Models

Note: All 2 & 3 section Roll-Thru models only have stainless steel interiors

Approvals:



Victory Refrigeration specification sheets are available online at www.victory-refrig.com.

CHARACTERISTICS	ONE SECTION		TWO SECTION		THREE SECTION	
	Roll-In	Roll-Thru	Roll-In	Roll-Thru	Roll-In	Roll-Thru
Width, Overall	36 1/2	36 1/2	68 7/8	68 7/8	101 1/4	101 1/4
Depth, Overall (incl. handles)	35 7/8	39 3/8	35 7/8	39 3/8	35 7/8	39 3/8
Height, Overall	89 1/2	89 1/2	89 1/2	89 1/2	89 1/2	89 1/2
Depth, Door(s) Open 90°	65 1/4	65 1/4	65 1/4	65 1/4	65 1/4	65 1/4
Depth Cast Over Ramp	35 1/2	35 1/2	35 1/2	35 1/2	35 1/2	35 1/2
Clear Door Width	27 3/4	27 3/4	27 3/4	27 3/4	27 3/4	27 3/4
Clear Full Door Height	72 1/4	72 1/4	72 1/4	72 1/4	72 1/4	72 1/4
Capacity Net (cubic feet)	36.3	36.3	72.6	72.6	108.9	108.9
No. of Full Doors	1	2	2	4	3	6
Cabinet Voltage	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1
Feed Wires	3	3	32	3	3	3
Condensing Unit Voltage	208-230/60/1	208-230/60/1	208-230/60/1	208-230/60/1	208-230/60/1	208-30/60/1
Condensing Unit Size (HP)	3/4	1	1	2	2.5	2.5
Total Amperes	10.9	13.1	13.9	18.2	22.7	22.7

Crated dim. & wts.	Ht.	Width	Depth	Cu.Ft.	Lbs
One Section	92 1/2	41 3/4	44 3/4	94.1	720
Two Section	92 1/2	74 5/8	44 3/4	168.1	1090
Three Section	92 1/2	107	44 3/4	241.1	1470

Approximate Roll-Thru weights, add 15%


FOR REMOTE MODELS—Substitute an "R" for the "S" in suffix. For example: Model FIS-1D-S7 (self-contained) would be FIS-1D-R7 remote cabinet. Air circulating fans, expansion valve and plasticized coil are provided. Condensing units not supplied. The following units are recommended with 1/2" O.D. Suction line, 3/4" O.D. Liquid line.

REMOTE REFRIGERATION

	Cond. Unit	BTUH	Cabinet	Amps*
One Section	3/4 H.P.	2540	115/60/1	4.9
Two Section	1 H.P.	4400	115/60/1	7.8
Three Section	2.5 H.P.	5800	115/60/1	8.5

*(In Defrost) For Remote Roll-Thru—Consult factory

Dimensional tolerance ± 1/4" Metric dimensions (MM)

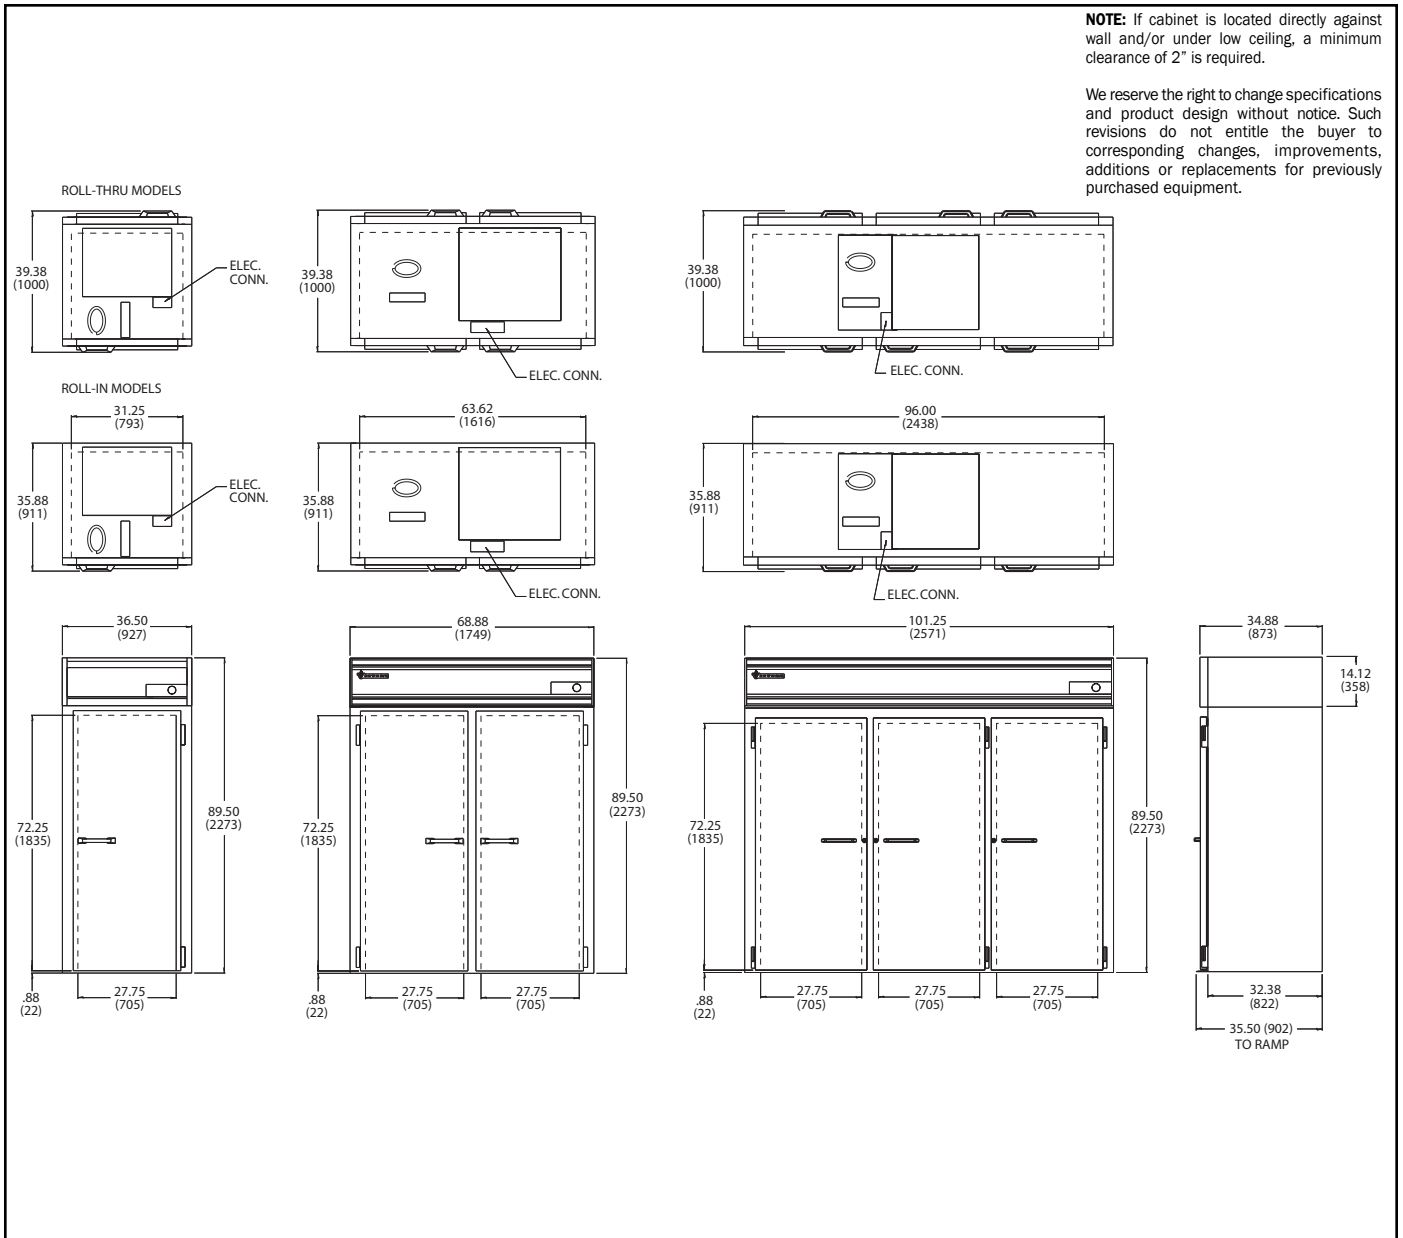

NOTE: If cabinet is located directly against wall and/or under low ceiling, a minimum clearance of 2" is required.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

Continuous product development may necessitate specification changes and design without notice.



Victory participates in the KCL CADalog, the most current source of CAD symbols for foodservice designers worldwide. Symbols include standard equipment in plan, side, front and 3-D views, layered for FEDAI/FCSI recommended guidelines.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>