



Project: _____
 Location: _____
 Item #: _____
 Quantity: _____

Extra Wide Display Refrigerators (Half Door Model)

DRS MODELS — DRS-2D-S7-EW-HD
 Stainless steel exterior and interior.

DRSA MODELS — DRSA-2D-S7-EW-HD
 Stainless steel exterior.
 Aluminum interior.

Pass-Thru and Remote Models Available



DRS-2D-S7-EW-HD

DRS and DRSA Models

- Digital Thermometer/Battery Back-Up
- Adjustable Stainless Steel Legs

Standard Features (all models)

- Energy Saver Switch
- Fluorescent Light Switch
- Stainless Steel Case Front and Sides
- Hinged Doors
- Lifetime Heavy-Duty Cam Lift Hinges and Safety Grip Handles
- Adjustable Wire Shelves
- Self-Closing Double Pane Glass Doors
- Self-Closing Doors with Safety Stops
- Bright Fluorescent Interior Lighting
- Energy Saving Thermal Breaker Strips
- Hinged Doors with Heavy-Duty Cylinder Locks
- Sliding Doors with Plunger Locks
- One Piece Self-Adjusting Magnetic Door Gaskets
- High Impact ABS Interior Door Liner
- Plasticized Fin Coil
- Environmentally Friendly R-134a Refrigerant
- Non-Electric Condensate Evaporator
- Cord and Plug Attached on 115v Models 12 Amps or Less

Cabinet:

The Victory Display Refrigerator is ideal for applications where display of products is required for customer self-service sales and can be used as a working refrigerator where space is limited. The cabinet front is constructed of heavy gauge polished stainless steel. Foamed-in-place polyurethane insulation throughout the cabinet ensures the ultimate in energy efficiency. Each display refrigerator has bright fluorescent interior lighting to give high visibility to the stored product.

Doors:

The self-closing, sliding glass doors are double glass vacuum-sealed and are completely encased in stainless steel frames. The doors glide easily on stainless steel ball bearing wheels. The lower self-closing stainless steel doors have lifetime cam-lift hinges and safety grip handles.

Shelving:

The wire shelves are adjustable in one-inch increments. A wide variety of optional pan slides for 18"x26" and 14"x18" trays and pans are available.

Refrigeration System:

All components of the self-contained refrigeration system are mounted on top of the cabinet. The air circulating fans and the forced convection-cooling coil are contained in an insulated housing separate from the product food zone allowing for maximum food storage capacity. All condensate water is disposed of automatically by the energy efficient non-electric condensate evaporator, no plumbing is required.

Optional Features and Accessories

- Dial Thermometer
- Sliding Glass Doors in Place of Hinged Door
- Change Door Swing
- Adjustable Stainless Steel Wire Shelves
- Stainless Steel Angle Pan Slides
- Zinc Plated Wire Pan Slides
- 5" Diameter Heavy-Duty Swivel Casters with Brakes
- Stainless Steel Case Back
- Remote and Pass-Thru Models

Approvals:



Victory Refrigeration specification sheets are available online at www.victory-refrig.com.

| CHARACTERISTICS | TWO SECTION | |
|-----------------------------------|-------------|--------------|
| | Reach-In | Pass-Thru |
| Width, Overall | 58 1/8 | 58 1/8 |
| Depth, Overall (incl. handles) | 35 7/8 | 39 3/8 |
| Height, Overall (incl. adj. legs) | 84 | 84 |
| Depth, Door(s) Open 90° | 60 | 87 5/8 |
| Clear Sliding Door Width | 19 1/2 | 19 1/2 |
| Clear Hinged Door Width | 22 1/8 | 22 1/8 |
| Clear Half Door Height | 25 3/8 | 25 3/8 |
| Capacity Net (cubic feet) | 52.0 | 56.6 |
| No. of Half Doors | 4 | 8 |
| No. of Shelves | 6 | 6 |
| Shelf Area (square feet) | 38.2 | 38.2 |
| Cabinet Voltage | 115/60/1 | 115/60/1 |
| Feed Wires | 2 | 3 |
| Condensing Unit Voltage | 115/60/1 | 208-230/60/1 |
| Condensing Unit Size (HP) | 1/2 | 3/4 |
| Total Amperes | 12.1 | 10.9 |

| Crated dim. & wts. | Ht. | Width | Depth | Cu.Ft. | Lbs |
|--------------------|-----|-------------------|-------------------|--------|-----|
| Two Section | 87 | 63 ^{3/8} | 44 ^{3/4} | 143.3 | 915 |


Approximate Pass-Thru weights, add 15%

FOR REMOTE MODELS— Substitute an "R" for the "S" in suffix. For example: Model DRS-1D-S7-EW-HD (self-contained) would be DRS-1D-R7-EW-HD remote cabinet. Air circulating fans, expansion valve and plasticized coil are provided. Condensing units not supplied. The following units are recommended with 1/2" O.D. Suction line, 3/4" O.D. Liquid line.

| REMOTE REFRIGERATION | | | | |
|----------------------|------------|------|----------|------|
| | Cond. Unit | BTUH | Cabinet | Amps |
| Two Section | 1/2 H.P. | 4400 | 115/60/1 | 3.7 |

For Remote Pass-Thru—Consult factory

Dimensional tolerance ± 1/4" Metric dimensions (MM)

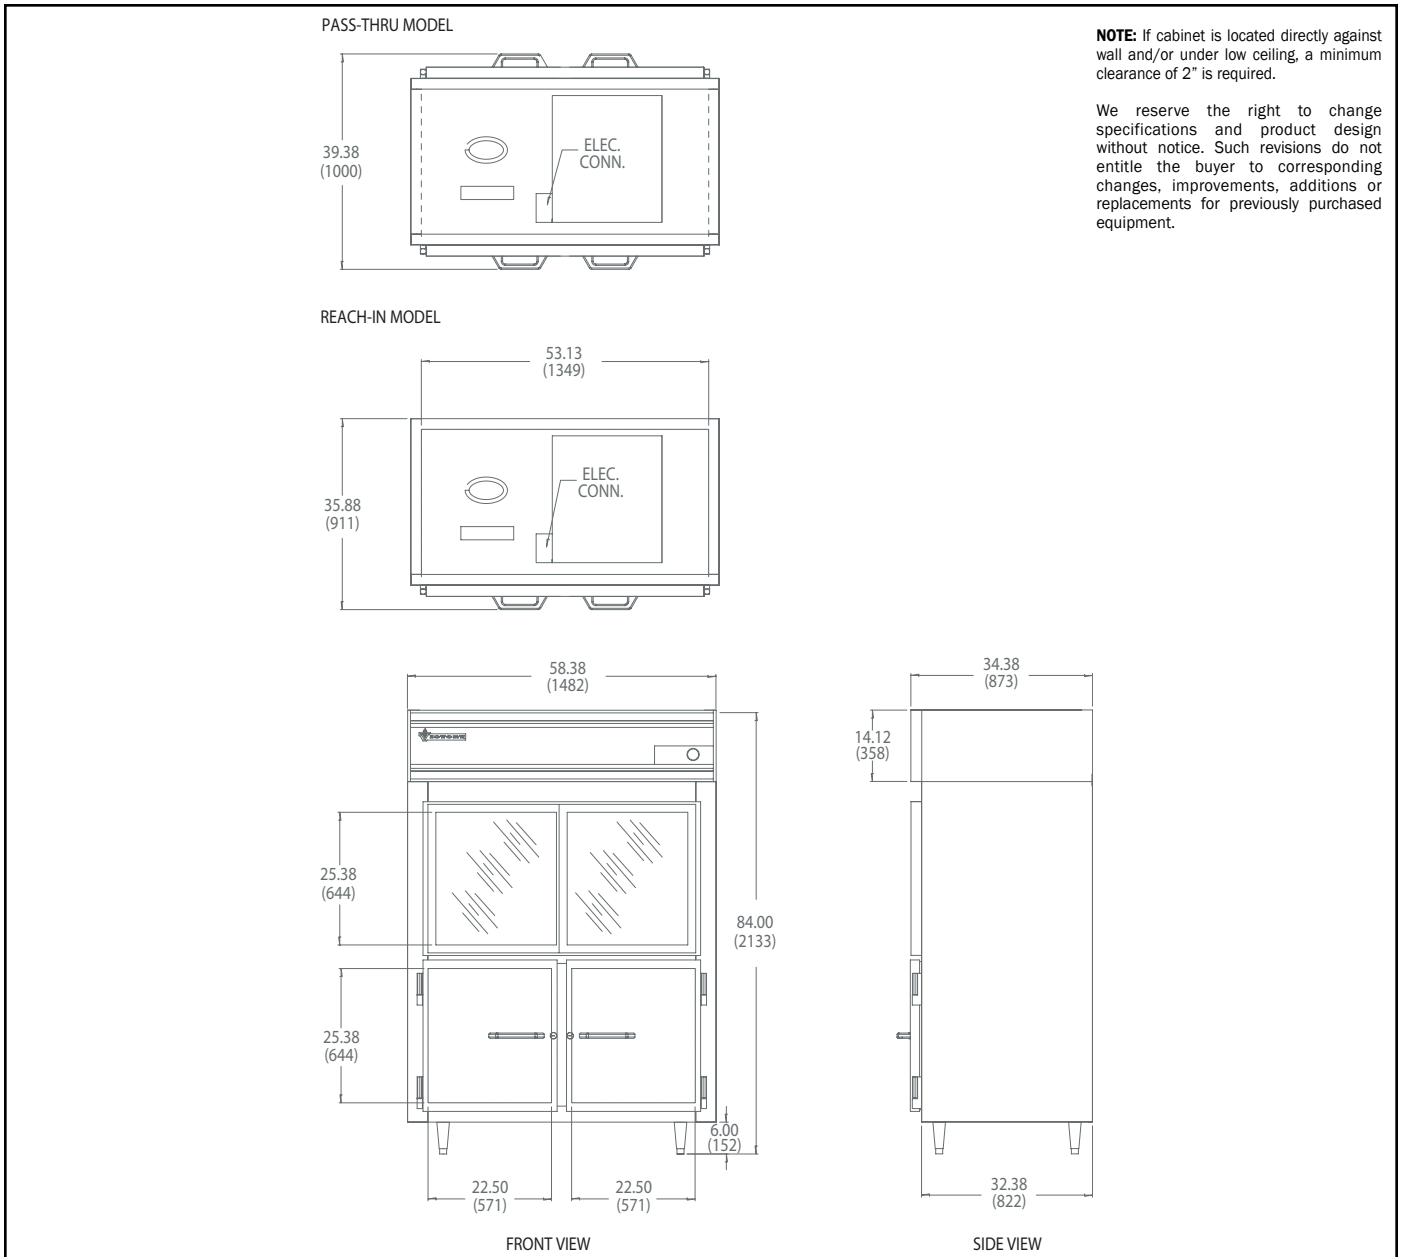

Continuous product development may necessitate specification changes and design without notice.



Victory participates in the KCL CADalog, the most current source of CAD symbols for foodservice designers worldwide. Symbols include standard equipment in plan, side, front and 3-D views, layered for FEDA/FCSI recommended guidelines.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>