



Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Item #: \_\_\_\_\_  
 Quantity: \_\_\_\_\_

## Undercounter Refrigerators

### URS MODELS —

Stainless steel  
 exterior and  
 interior.

**URS-1-S7**  
**URS-2-S7**  
**URS-3-S7**

#### Remote Models Available (Two and Three Section Models Only)



**URS-2-S7**

**Stainless Steel Tops are Optional**

#### Standard Features

- Dial Thermometer
- Stainless Steel Case Front, Door(s) and Sides
- Lifetime Heavy-Duty Cam Lift Hinges
- Adjustable Wire Shelf(s)
- Adjustable Stainless Steel Legs
- Safety Grip Handle(s)
- Self-Adjusting Magnetic Door Gaskets
- Plasticized Fin Coil
- Condensate Automatically Evaporated
- Energy Efficient Refrigeration System
- Environmentally Friendly R-134a Refrigerant

#### Optional Features and Accessories

- Stainless Steel Top and Back
- Adjustable Stainless Steel Wire Shelves
- Stainless Steel Wire Pan Slides
- Zinc Plate Wire Pan Slides
- 5" Diameter Heavy-Duty Swivel Casters
- A Three Drawer Module can be Used in Place of One Door
- Remote Models (Two and Three Section Models Only)

#### Cabinet:

The cabinet front and doors are constructed of heavy gauge polished stainless steel to maintain an attractive appearance after years of heavy use. Foamed-in-place polyurethane insulation throughout the cabinet and doors ensures the ultimate in energy efficiency.

#### Doors:

The self-closing doors are securely mounted on rugged cam-lift hinges, which have a lifetime guarantee. Each door has self-adjusting magnetic gaskets for positive sealing action. Humidity control wires located around the door jamb prevent condensation from forming on the cabinet front and are concealed by a high impact, non-conductive thermal breaker strip. The interior door liner is constructed of stainless steel, which is easy to clean.

#### Shelving:

The heavy-duty wire shelf(s) are adjustable in one-inch increments. A wide door opening allows the use of a variety of optional plan slide types for 12"x20", 18"x26", and 14"x18" pans and trays.

#### Refrigeration System:

All components of the self-contained refrigeration system are contained within a side-mounted housing and concealed behind a louvered grille. All condensate water is disposed of automatically by the energy efficient condensate evaporator, no plumbing is required.

Approvals:



Victory Refrigeration specification sheets are available online at [www.victory-refrig.com](http://www.victory-refrig.com).

CHARACTERISTICS	ONE SECTION	TWO SECTION	THREE SECTION	TWO SECTION REMOTE	THREE SECTION REMOTE
Width, Overall	50 1/8	77 1/4	105	60 1/2	87 3/8
Depth, Overall (incl. door)	32 7/8	32 7/8	32 7/8	32 7/8	32 7/8
Height, Overall (incl. adj. legs)	34 1/2	34 1/2	34 1/2	34 1/2	34 1/2
Height, Case with Stainless Steel Top (incl. adj. legs)	35 1/4	35 1/4	35 1/4	35 1/4	35 1/4
Depth, Door(s) Open 90°	55 3/4	55 3/4	55 3/4	55 3/4	55 3/4
Clear Door Opening, Height/Width	23 x 22	23 x 22	23 x 22	23 x 22	23 x 22
Capacity Net (cubic feet)	8.4	18.3	28.2	18.3	28.2
No. of Doors	1	2	3	2	3
No. of Shelves	2	4	6	4	6
Shelf Area (square feet)	8.5	18.6	26.3	18.6	26.3
Cabinet Voltage	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1
Feed Wires	2	2	2	2	2
Condensing Unit Voltage	115/60/1	115/60/1	115/60/1	—	—
Condensing Unit Size (HP)	1/4	1/4	1/3	—	—
Total Amperes	6.4	6.4	12.2	—	—


Crated dim. & wts.	Ht.	Width	Depth	Cu. Ft.	Lbs
One Section	34 1/4	56 1/4	36 3/4	43.1	465
Two Section	34 1/4	83 1/4	38 3/4	63.9	515
Three Section	34 1/4	111	38 3/4	85.3	600

**FOR REMOTE MODELS**— Substitute an "R" for the "S" in suffix. For example: Model URS-1D-S7 (self-contained) would be URS-1D-R7 remote cabinet. Air circulating fans, expansion valve and plasticized coil are provided. Condensing units not supplied. The following units are recommended with 1/2" O.D. Suction line, 1/4" O.D. Liquid line.

**REMOTE REFRIGERATION**

	Cond. Unit	BTUH	Cabinet	Amps
Two Section	1/4 H.P.	2540	115/60/1	3.9
Three Section	1/3 H.P.	3800	115/60/1	4.3

Dimensional tolerance ± 1/4" Metric dimensions (MM)

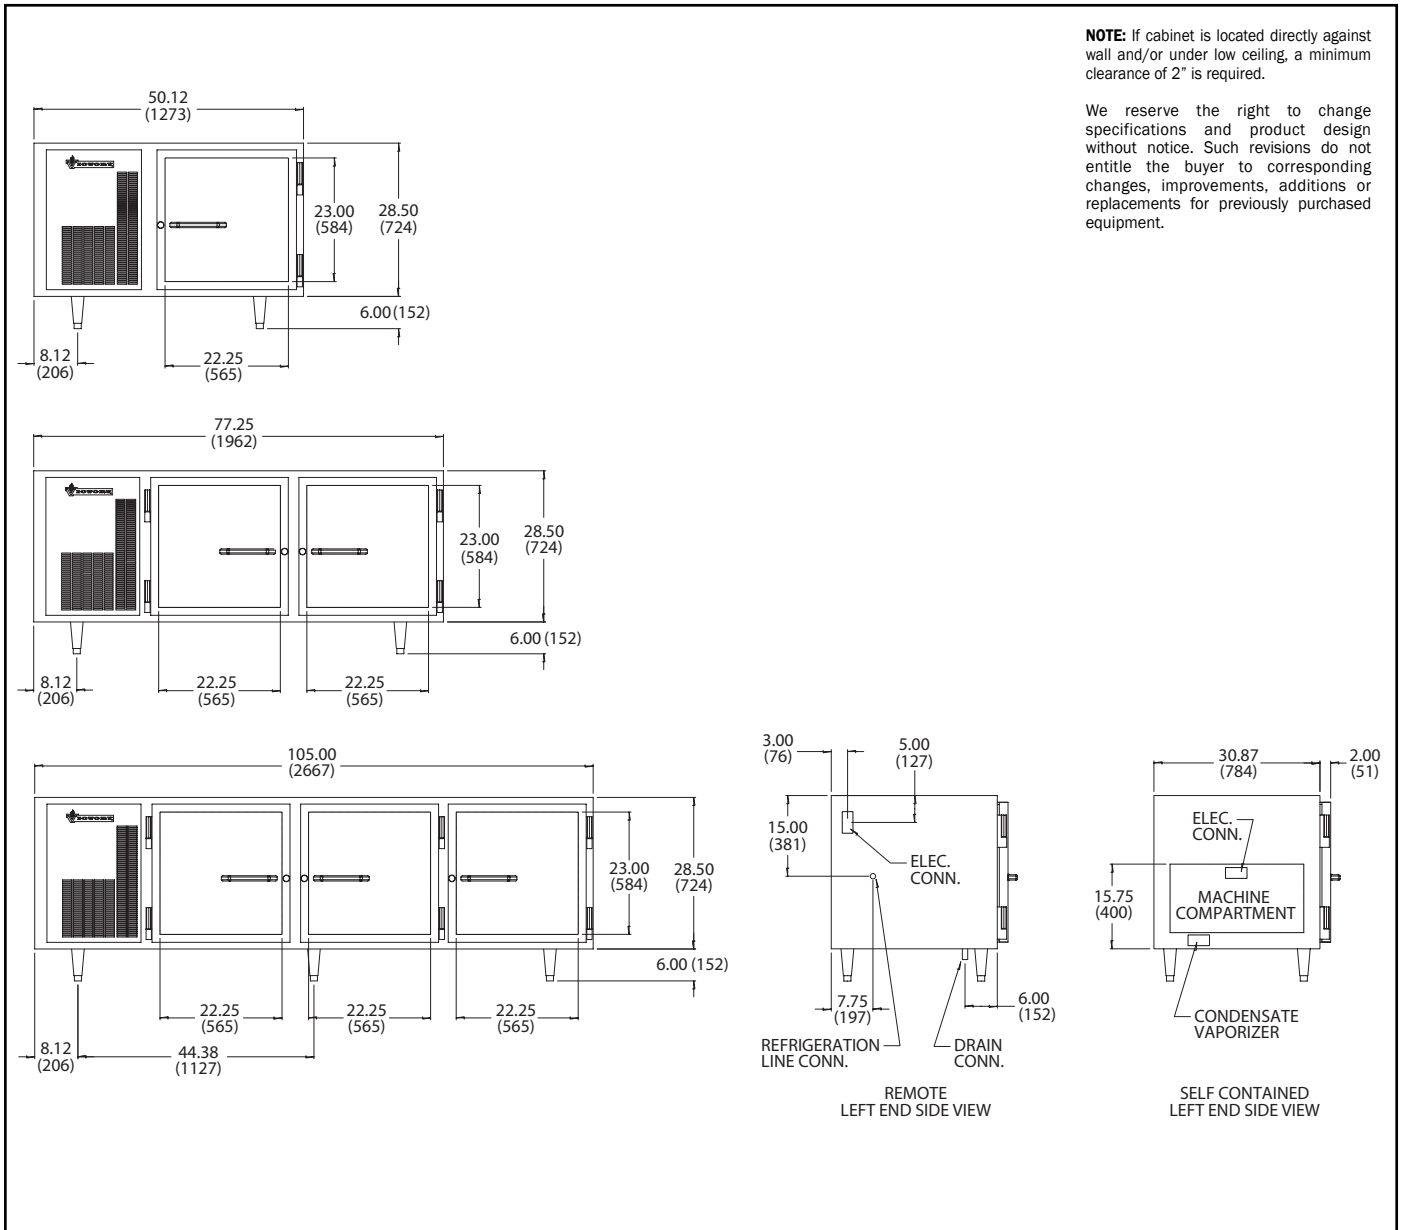

**NOTE:** If cabinet is located directly against wall and/or under low ceiling, a minimum clearance of 2" is required.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

Continuous product development may necessitate specification changes and design without notice.



Victory participates in the KCL CADalog, the most current source of CAD symbols for foodservice designers worldwide. Symbols include standard equipment in plan, side, front and 3-D views, layered for FEDA/FCSI recommended guidelines.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>