

RANGE COMPOSITION

Zanussi Professional have designed and produced a complete range of refrigerated tables, that combines the dual function of worktop and refrigerated table. This versatility allows notable savings in space whilst offering functional and modular solutions to kitchen requirements. The main benefit of this innovative new range is total flexibility: you have the possibility to compose your table to your exact personal requirements. You can order each individual unit and combine them together: structure, top, door, drawer and refrigeration unit. We offer a basic range of 38 models but the choice is infinite. The range presented here consists of 3 models with a temperature from -13° to -22°C. Models are available with 2 doors; and 3 doors.



113187

PT E SERIES

ACTIVE FREEZER TABLES **ZANUSSI** PROFESSIONAL

FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Constructed entirely in AISI 304 stainless steel with satin finish and polished interior guaranteeing maximum reliability. 2" height-adjustable AISI 304 stainless steel feet (-15 to +80 mm). Completely removable grid support structure in AISI 304 stainless steel
- ◆ The worktop has a height of 50 mm and is slotted into place for easy removal or replacement with a different type of top (supplied on request).
- ◆ High-density expanded polyurethane foam, 60 mm in thickness, with cyclopentane injection, guarantees exceptional, long-term insulation and notable energy savings.
- ◆ The design of the refrigeration unit allows maximum usage of the available space in the compartment. It is also mounted on a pull-out system to facilitate maintenance and cleaning.
- ◆ Electronic control panel - ACTIVE - allowing the Perfect Food Conservation: 4 temperature probes in 4 different locations are controlled by the electronic panel; even if one of these probes is broken the optimal conservation temperature is maintained.

CHARACTERISTICS	MODELS	
	TRF132AE 113186	TRF183AE 113187
Operating temperature - min/max °C	-22/-15	-22/-15
Operating mode	Ventilated	Ventilated
Gross capacity (D.I.N. 8952) - l.	291	440
External dimensions - mm		
width	1274	1759
depth/with open doors	700, 1110	700, 1110
height	850	850
N° and type of door	2	3
Door hinges	1 Left+1 Right	1 Left+2 Right
N° and type of grids (included)	2, GN 1/1	3, GN 1/1
Compressor power - HP	3/4	3/4
N° defrost in 24 hrs.	4/16'	4/16'
Refrigerant type	R404a	R404a
Refrigerant quantity - g.	280	280
Refrigeration power - W	925	925
Power - kW		
installed-electric	0.75	0.8
Noise level - dBA	58	58
Net weight - kg.	129	152
Power supply - V, phases, Hz	230 V, 1N, 50	230 V, 1N, 50
INCLUDED ACCESSORIES		
1/1 GN GREY "RILSAN" GRID	2	3

◆ The new electronic control allows the defrosting cycles to activate only when it is necessary, it means that if the evaporator is covered with ice, a defrosting cycle will be activated, if it is clear no cycle is performed.

The smart defrosting assures a better utilisation of the appliance and a 5% reduction in energy consumption.

◆ Alarm service allows 24 h per day self diagnostics in order to use the fridge in the best way. Possibility to connect the appliance to a computer for monitoring the events

◆ HACCP: monitoring the temperature 24 h per day and keeping record of the temperature when over the critical limit. Easy consultation of the display and sound alarm.

◆ Possibility to have a qualitative evaluation regarding the utilisation of the appliance based on the working condition of the major components (evaporator, condenser, compressor).

◆ The new central position of the refrigeration unit allows perfect air circulation in the different compartments and temperature uniformity.

◆ These appliances are suitable for use in tropical climates (+43°C) ensuring high performance even in extreme ambient conditions.

◆ The base, with water drain, is pressed and features rounded internal corners to guarantee perfect cleaning.

◆ The refrigerated tables feature: reversible, self-closing doors; recessed ergonomical handles.


◆ CFC and HCFC free.

◆ All models comply with the standards required by the main international approval bodies and are H marked.

ACCESSORIES	MODELS	
	TRF132AE 113186	TRF183AE 113187
1/1 GN GREY "RILSAN" GRID	881435	881435
2 WHEELS FOR REFRIGERATORS/REFRIG.TABLES	880539	880539
KIT HACCP ADV.CONNECTION-REF.ELECTRONIC	880090	880090
LOCK FOR REFRIGERATED COUNTERS	881499	881499
PLASTIC CONTAINER GN 1/1 H=100 MM	811451	811451
PLASTIC CONTAINER GN 1/1 H=150 MM	881040	881040
PLASTIC CONTAINER GN 1/1 H=65 MM	881038	881038
PRINTER FOR HACCP BASIC VERSION	881532	881532




www.zanussiprofessional.com

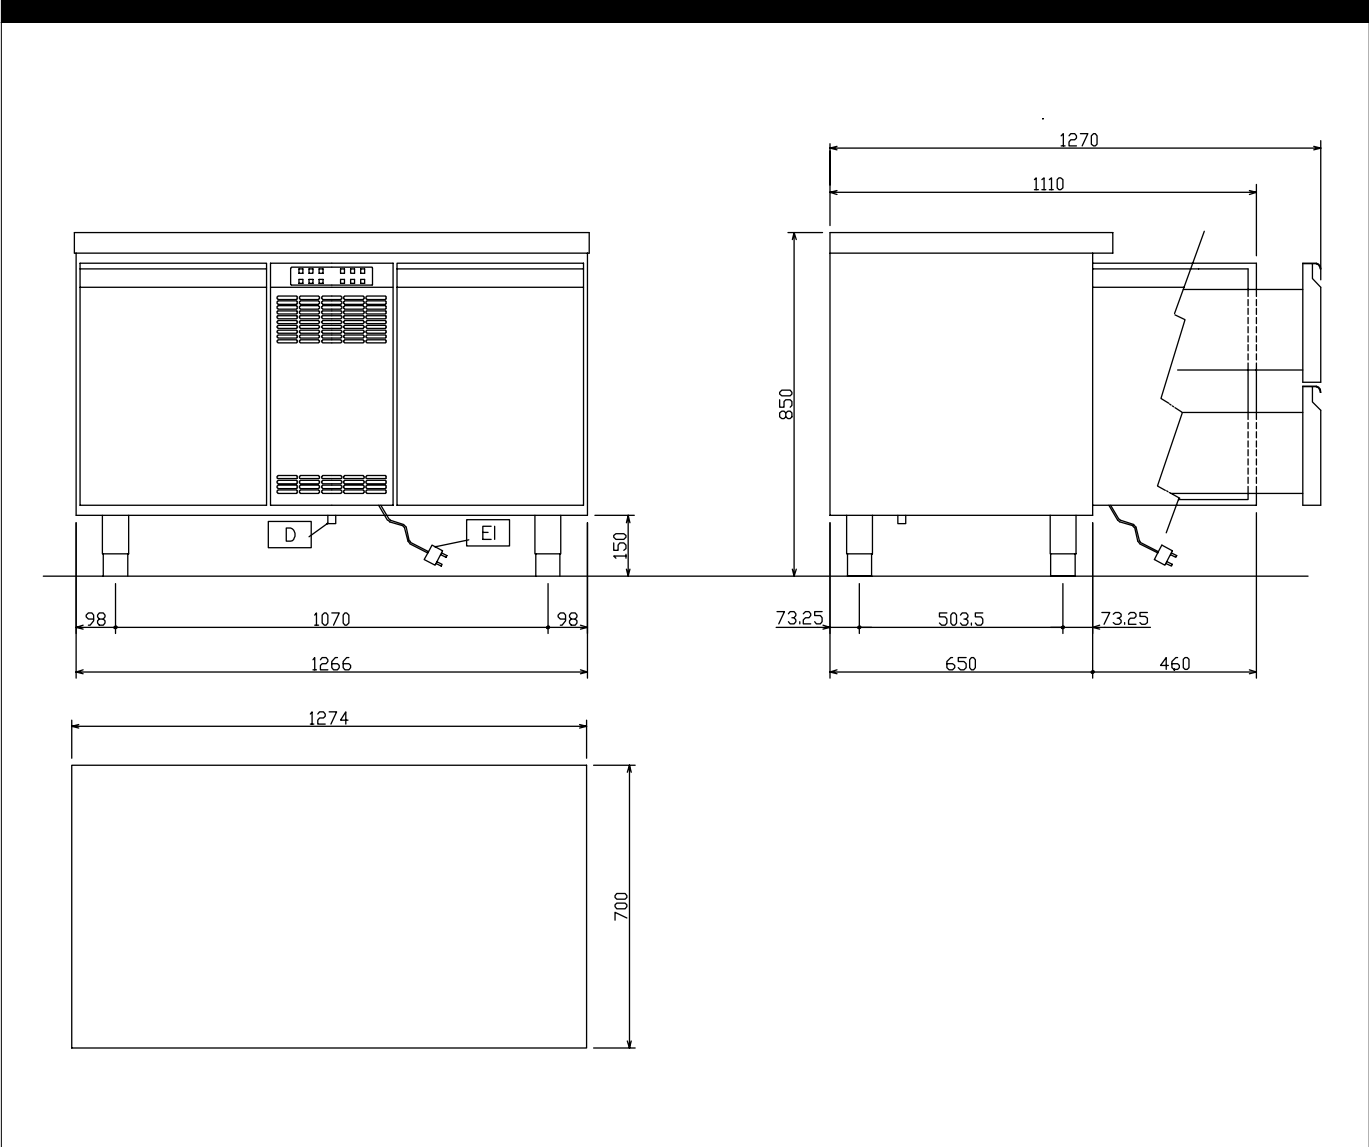

	TRF132AE 113186
D - Water drain	16mm
EI - Electrical connection	230 V, 1N, 50



www.zanussiprofessional.com

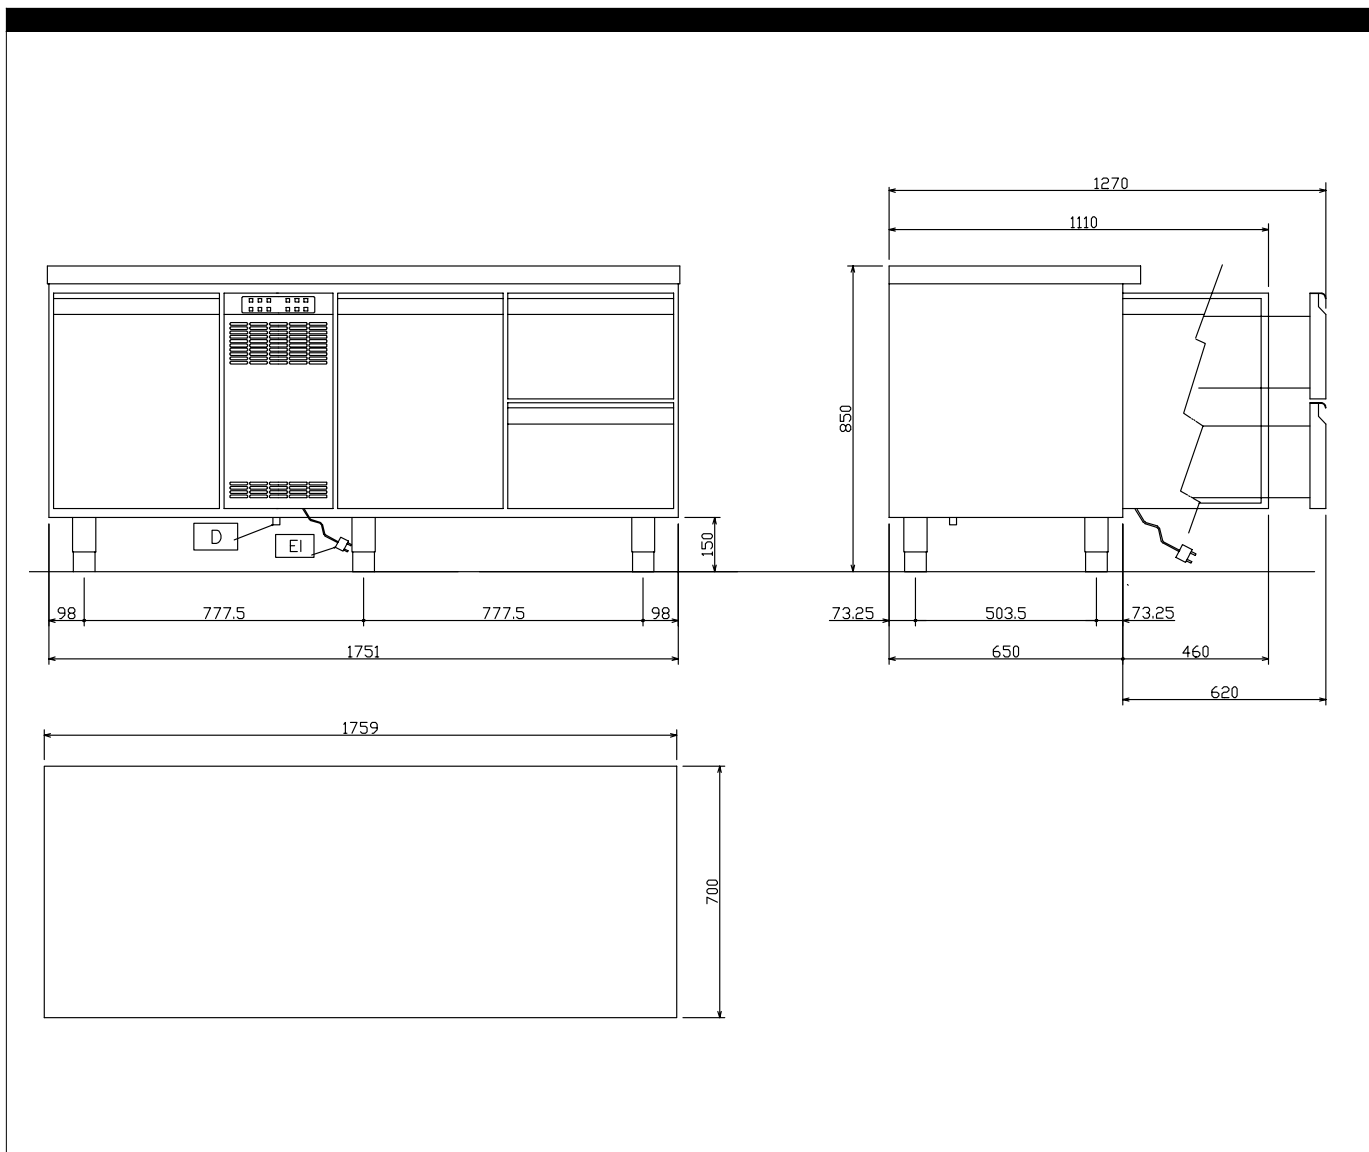

	TRF183AE 113187
D - Water drain	16mm
EI - Electrical connection	230 V, 1N, 50



www.zanussiprofessional.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>