

RANGE COMPOSITION

The range consists of 6 fan assisted models of 600 litre refrigeration cabinets that offer excellent standards in terms of performance and efficiency. These models come in freezer version with a choice of materials (stainless steel or white painted steel) and are available with full doors.



726318

AU SERIES

600 LT DIGITAL FREEZERS **ZANUSSI** PROFESSIONAL

FUNCTIONAL AND CONSTRUCTION FEATURES

◆ Internal and external structure in stainless steel or white painted steel, external base, top and back in galvanized steel (stainless steel on

model RS06FX1F4). 150 mm high - adjustable feet.


CHARACTERISTICS	MODELS					
	RS06FX1F4 726457	RS06FX1F 726318	RS06F41FS 728303	RS06FW1F 726474	RS06FX2H 726690	RS06FX1FR 727104
Operating temperature - min/max °C	-22/-15	-22/-15	-22/-15	-22/-15	-22/-15	-22/-15
Operating mode	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Type of stainless steel						
external	304 AISI	304 AISI	Stainless Steel	Prepainted Steel	Stainless Steel AISI 304 Scotch Brite	304 AISI
internal	304 AISI	304 AISI	Stainless Steel	Stainless Steel	Stainless Steel AISI 304 Scotch Brite	304 AISI
Gross capacity (D.I.N. 8952) - l.	600	600	600	600	600	600
Cooling unit	Built-In	Built-In	Built-In	Built-In	Built-In	Remote
External dimensions - mm						
width	720	720	720	720	720	720
depth/with open doors	788, 1440	788, 1440	788, 1440	788, 1440	788, 1450	788, 1440
height	2000	2000	2000	2000	2000	2000
Door hinges	Right Side	Right Side	Right Side	Right Side	Right Side	Right Side
N° and type of grids (included)	3, GN 2/1	3, GN 2/1	3, GN 2/1	3, GN 2/1	4, GN 2/1	3, GN 2/1
N° defrost in 24 hrs.	4/30'	4/30'	4/30'	4/30'	4/30'	4/30'
Refrigerant type	R404a	R404a	R404a	R404a	R404a	R404a
Refrigerant quantity - g.	270	270	270	270	270	270
Refrigeration power - W	752	752	752	752	752	843
Power - kW						
installed-electric	0.66	0.66	0.66	0.66	0.66	0.175
Internal light	●					
Noise level - dBA	59.5	59.5	59.5	59.5	59.5	
Net weight - kg.	134	134	128	134	134	134
Power supply - V, phases, Hz	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50
INCLUDED ACCESSORIES						
2 S/S RUNNERS FOR 600-650/1300-1400L.REF	3	3	3	3		3
2 S/S SIDE RUNNERS FOR 600-1300L REFRIG.					4	
2/1 GN GREY "RILSAN" GRID	3	3	3	3	4	3

- ◆ Digital control panel allowing the easy and precise setting and control of the internal temperature.
- ◆ Completely automatic defrosting and automatic evaporation of defrost water (304 AISI models), manual emptying of defrost water (Stainless steel models).
- ◆ High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet and easily removable runners and grids (without the use of tools).
- ◆ The refrigeration unit can operate in tropical climates (+43°C ambient temperature).
- ◆ Extremely quiet operation at 51 dBA.
- ◆ Excellent forced air cooling system that ensures the utmost uniformity of temperature in the cabinet and guarantees a perfect storage quality of the goods.
- ◆ High-density expanded polyurethane insulating foam, 60 mm in thickness, with cyclopentane injection, guarantees exceptional, long-term insulation and notable energy savings.
- ◆ The rational use of the internal space of the refrigerator guarantees a large storage area suitable to contain 2/1 GN grids.
- ◆ Reversible self-closing door, in positions less than 90°, with a stop at 95° and a maximum opening at 180°, equipped with a magnetic door seal to guarantee perfect closure. The pressed stainless steel recessed door handle without joints makes opening the cabinet extremely easy. All the doors are fitted as standard with locks and keys and a microswitch to switch off the fan when the door is opened.
- ◆ Stainless steel feet (plastic interior).
- ◆ A wide range of optional accessories are available.
- ◆ CFC and HCFC free.

ACCESSORIES	MODELS					
	RS06FX1F4 726457	RS06FX1F 726318	RS06F41FS 728303	RS06FW1F 726474	RS06FX2H 726690	RS06FX1FR 727104
2 S/S RUNNERS FOR 600-650/1300-1400L.REF	881456	881456	881456	881456		881456
2 S/S SIDE RUNNERS FOR 600-1300L REFRIG.					880557	
2 WHEELS FOR REFRIGERATORS/REFRIG.TABLES	880539	880539	880539	880539	880539	880539
2/1 GN AISI 304 S/S GRID	881067	881067	881067		881067	881067
2/1 GN GREY "RILSAN" GRID	880720	880720	880720	880720	880720	880720
ENERGY FREE ALARM DEVICE		881089	881089	881089	881089	881089
KIT HACCP EKIS	922166	922166	922166	922166	922166	922166
KIT INTEGRATED HACCP-DIG. REFR. (IR33)	880205	880205	880205	880205	880205	880205
KIT TO FIT 11 PASTRY TRAYS (400X600 MM)	881031	881031	881031	881031	881031	881031
MEAT RAIL FOR 650-1400 L REFRIGERATORS	881451					
PRINTER FOR HACCP BASIC VERSION REFRIG.	881457	881457	881457	881457	881457	881457
REMOTE UNIT -24-15°C FOR 550/650 LT						881465




www.zanussiprofessional.com

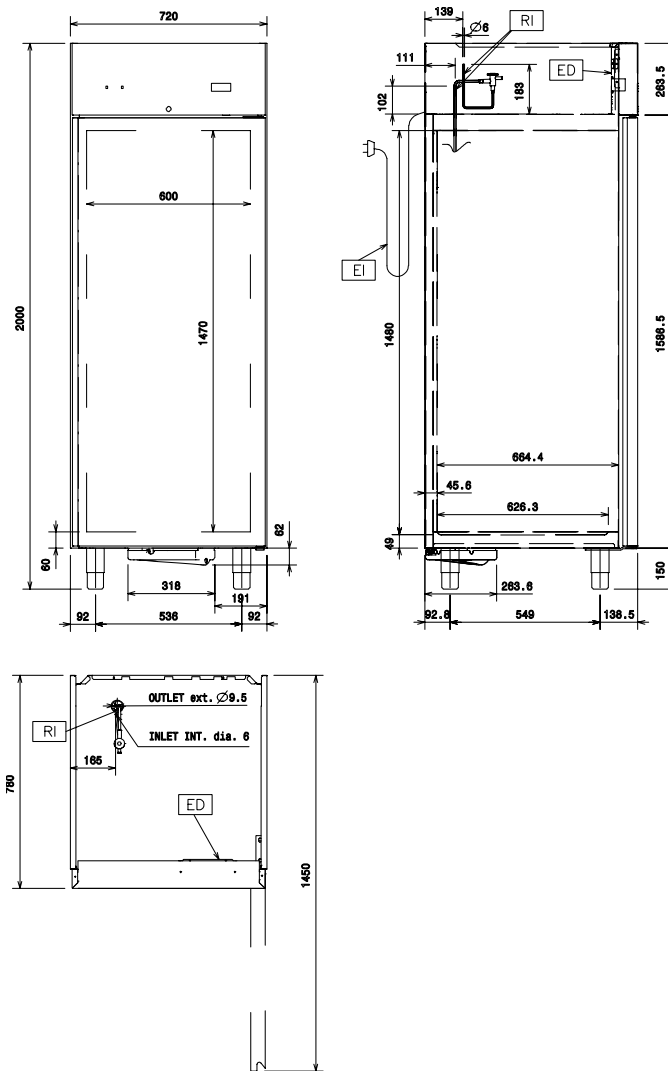

	RS06FX1F4 726457	RS06FX1F 726318	RS06F41FS 728303	RS06FW1F 726474
EI - Electrical connection	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50	230 V, 1, 50




www.zanussiprofessional.com

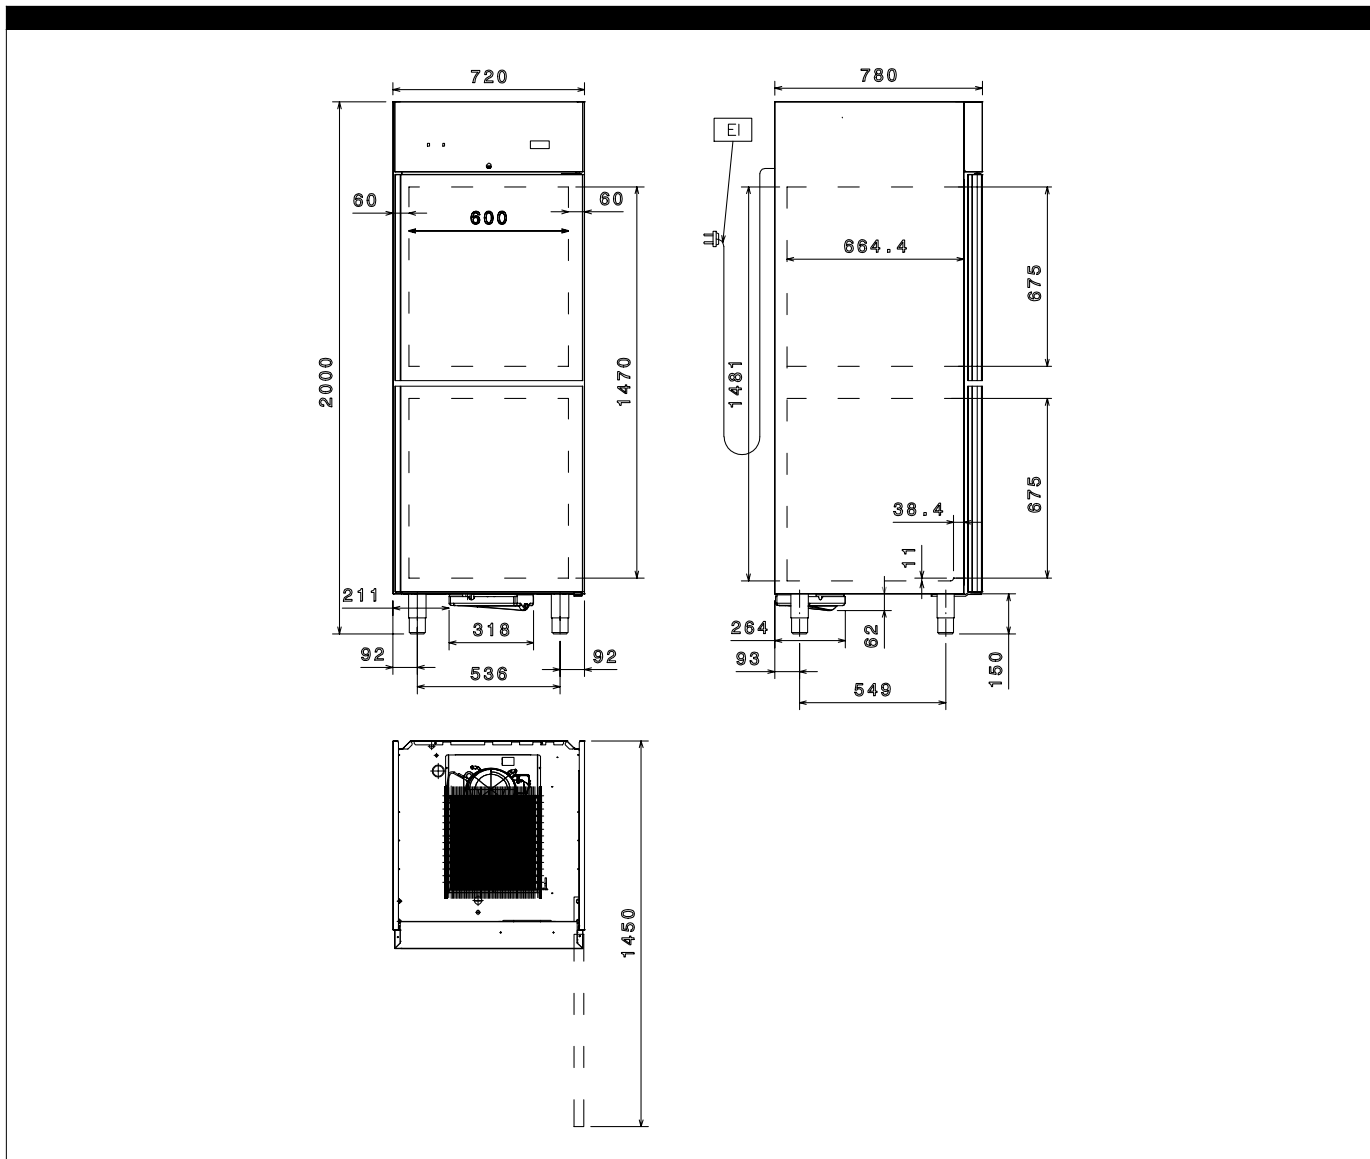

	<p>RS06FX2H 726690</p>
<p>EI - Electrical connection</p>	<p>230 V, 1, 50</p>



www.zanussiprofessional.com

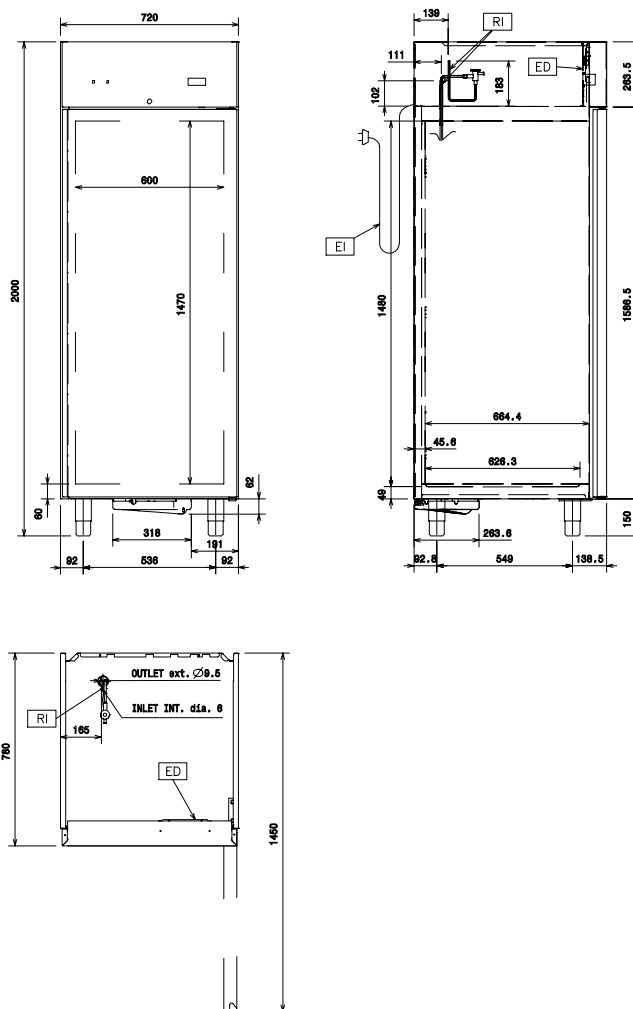

	RS06FX1FR 727104
ED - Remote electrical connection	●
EI - Electrical connection	230 V, 1, 50
RI - Remote refrigeration connection	●



www.zanussiprofessional.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>