

RANGE COMPOSITION

Zanussi Professional has designed and produced a complete range of refrigerated tables, that combines the dual function of worktop and refrigerated table. This versatility allows notable savings in space while offering functional and modular solutions to kitchen requirements. The range presented here consists of 4 models with a temperature range of -15° to -20°C, and available either with doors or a combination of doors and drawers.



728518

AU SERIES

FREEZER TABLES ZANUSSI PROFESSIONAL

FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Built-in compressor.
- ◆ Suitable for use in ambient temperatures of up to 38°C.
- ◆ Internal and external doors, front and side panels and removable worktop in 304 AISI stainless steel (excluding models RCSF2M24 and RCSF3M34).
- ◆ Rounded internal corners for ease of cleaning.
- ◆ Mounted on stainless steel legs with a plastic interior to give 150 mm clearance for ease of cleaning the floor.
- ◆ Adjustable temperature range from -15°C to -20°C to suit all storage requirements.


CHARACTERISTICS	MODELS					
	RCSF2M2 728512	RCSF3M3 728517	RCSF2M12 728518	RCSF3M22 728519	RCSF2M24 727009	RCSF3M34 727010
Operating temperature - min/max °C	-20/-15	-20/-15	-20/-15	-20/-15	-20/-15	-20/-15
Operating mode	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Type of stainless steel						
external	304 AISI	304 AISI	304 AISI	304 AISI	Stainless Steel	Stainless Steel
internal	304 AISI	304 AISI	304 AISI	304 AISI	Stainless Steel	Stainless Steel
Gross capacity (D.I.N. 8952) - l.	265	415	265	415	265	415
External dimensions - mm						
width	1238	1718	1238	1718	1238	1718
depth/with open doors	700, 1102	700, 1102	700, 1102	700, 1102	700, 1102	700, 1102
height	850	850	850	850	850	850
Internal dimensions - mm						
width	365	365	365	365	365	365
depth	580	580	580	580	580	580
height	543	543	543	543	543	543
Top material	304 AISI	304 AISI	304 AISI	304 AISI	Stainless Steel	Stainless Steel
N° of drawers			2½	2½		
Door hinges	1 Left+1 Right	1 Left+2 Right	Right Side	1 Left+1 Right	1 Left+1 Right	Left
N° and type of grids (included)	2, GN 1/1	3, GN 1/1	1, GN 1/1	2, GN 1/1	2, GN 1/1	3, GN 1/1
Compressor power - HP	3/4	3/4	3/4	3/4	3/4	3/4
N° defrost in 24 hrs.	every 6 hours	every 6 hours	every 6 hours	every 6 hours	every 6 hours	every 6 hours
Refrigerant type	R404a	R404a	R404a	R404a	R404a	R404a
Refrigerant quantity - g.	160	200	160	200	160	200
Refrigeration power - W	910	910	910	910	910	910
Power - kW						
installed-electric	0.52	0.45	0.52	0.56	0.52	0.45
Noise level - dBA	57.6	57.6	58	58	57.6	57.6
Net weight - kg.	119	119	119	142	119	119
Power supply - V, phases, Hz	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50
INCLUDED ACCESSORIES						
1/1 GN GREY "RILSAN" GRID	2	3	1	2	2	3

- ◆ Anti-tilt runners accept GN1/1 trays and grids.
- ◆ Digital control with temperature display.
- ◆ Forced air circulation for rapid cooling and an even temperature distribution.
- ◆ Worktop in AISI 304 stainless steel with 50 mm thickness.
- ◆ Access to all components from the front panel.
- ◆ In compliance with H requirements.
- ◆ CFC and HCFC free (ecological refrigerant type: R404a, - gas in foam: cyclopentane).
- ◆ 50 mm insulation thickness for energy saving.
- ◆ Developed and produced in ISO 9001 and ISO 14001 certified factory.

ACCESSORIES	MODELS					
	RCSF2M2 728512	RCSF3M3 728517	RCSF2M12 728518	RCSF3M22 728519	RCSF2M24 727009	RCSF3M34 727010
KIT 2 S/S GRIDS GN1/1 FOR REFRIG. TABLES	880139	880139	880139	880139	880139	880139
KIT 4 WHEELS (2 W/BRAKE)+4 (40MM) SPACERS	880025	880025	880025	880025	880025	880025
KIT DOOR REVERSIBILITY FOR REF. TABLES	880046	880046	880046	880046	880046	880046
KIT HACCP EKIS	922166	922166	922166	922166	922166	922166
KIT INTEGRATED HACCP-DIG. REFR. (IR33)	880205	880205	880205	880205	880205	880205
LOCK KIT	880024	880024	880024	880024	880024	880024
PRINTER FOR HACCP BASIC VERSION REFRIG.	881457	881457	881457	881457	881457	881457
S/S STRUCTURE TO SUPPORT 6 GRIDS (R+L)	880140	880140	880140	880140	880140	880140
STRUCTURE TO SUPPORT 3 GRIDS(RIGHT+LEFT)	880047	880047	880047	880047	880047	880047




www.zanussiprofessional.com

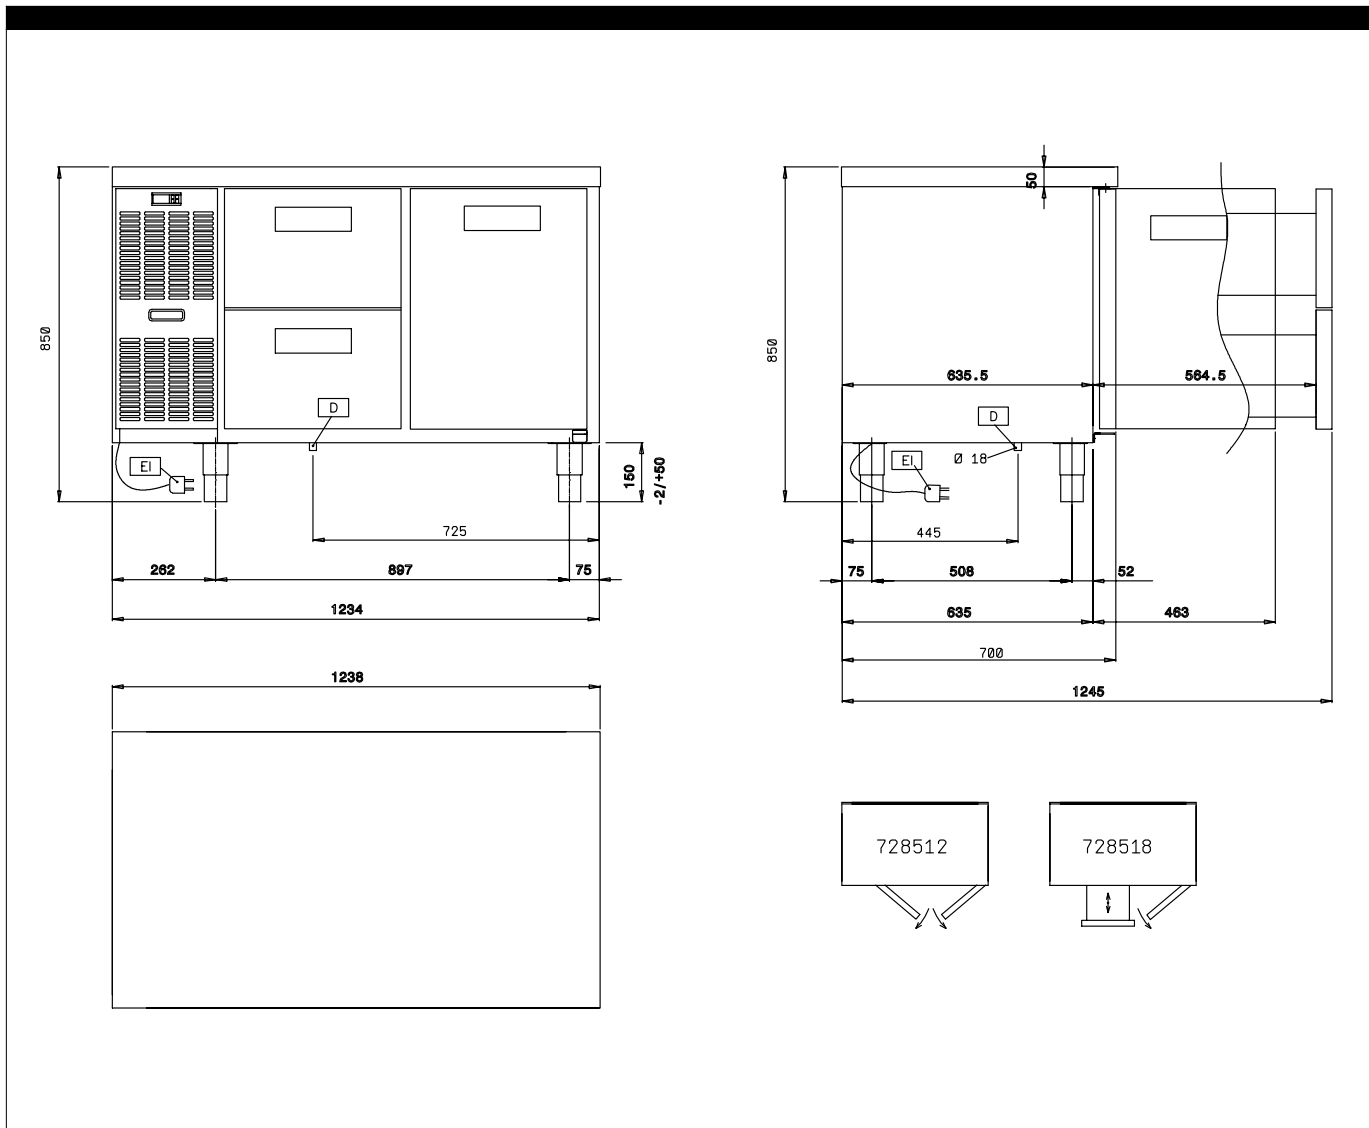

	RCSF2M2 728512	RCSF2M12 728518	RCSF2M24 727009
D - Water drain	16mm	16mm	16mm
EI - Electrical connection	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50



www.zanussiprofessional.com

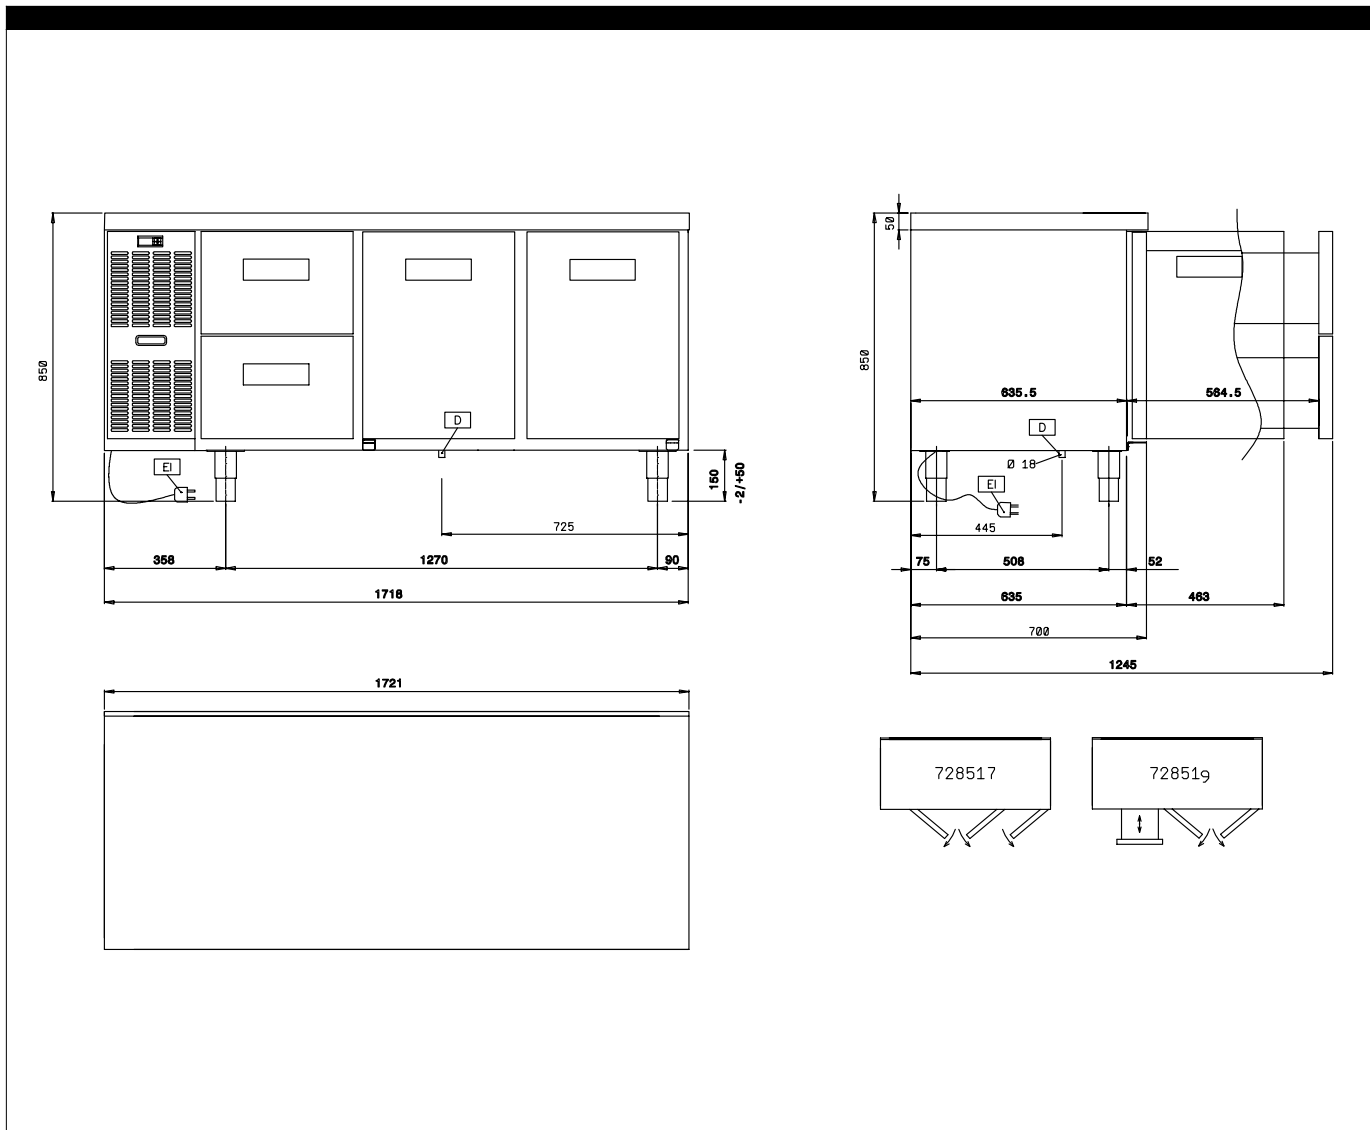

	RCSF3M3 728517	RCSF3M22 728519	RCSF3M34 727010
D - Water drain	16mm	16mm	16mm
EI - Electrical connection	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50



www.zanussiprofessional.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>