

## RANGE COMPOSITION

ZANUSSI Professional easySteam blends tradition with the latest technological research in order to satisfy the creativity and working requirements of today's professional kitchen. The easySteam range offers a choice of different models, providing a high degree of automation and an extensive range of accessories. The easySteam combis are designed to form complete cook&chill systems together with easyChill blast chillers/freezers, therefore, any installation can be tailored to meet the needs of the caterer.

The easySteam combis detailed are 10 GN 2/1 gas models.



## easySteam OVENS

**COMBI LW 10 GN 2/1-GAS** **ZANUSSI**  
PROFESSIONAL

## FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Convection cycle (max. 300 °C): ideal for meat to be cooked without humidity and "au gratin". In conjunction with the half-power function for all kinds of pastry cooking.
- ◆ Steam cycle (max. 130 °C): for products that can be cooked in water. Steam cooking respects the original properties of food and reduces weight loss.
- ◆ Combi cycle (max. 250°C): ideal for most kinds of cooking. Impressive reduction of cooking times and food shrinkage. The humidity generated by the food and the steam generator is automatically controlled by the By-pass technology for saving water and energy.
- ◆ easySteam ovens can cook by controlling either the cooking time or the product's core temperature through a single-sensor probe.
- ◆ Regeneration cycle: it produces the best humidity conditions for quickly heating the products to be regenerated (max. 250°C) on the plate.

TECHNICAL DATA		
CHARACTERISTICS	MODELS	
	FCZ102GBG 238503	FCZ102GBD 238513
Power supply	Gas	Gas
Gas	Natural Gas	LPG
Number of grids	10	10;
Runners pitch - mm	65	
Cooking cycles - °C		
air-convection	300	300
steam	130	130
combi	250	250
Convection	●	●
Steaming	●	●
Convection/steaming	●	●
Cook&hold	●	●
Regeneration	●	●
Low temp steaming	●	●
Two-speed fan	●	●
Meat probe	●	●
Semi-automatic cleaning cycle	●	●
External dimensions - mm		
width	1208	1208
depth	1065	1065
height	1058	1058
Internal dimensions - mm		
width	640	640
depth	855	855
height	736	736
Power - kW		
boiler	25	25
cooking chamber	27	27
electric	1	1
gas	45	45
auxiliary	1	1
Net weight - kg.	203	203
Supply voltage	230 V, 1N, 50/60	230 V, 1N, 50/60

- ◆ Fan speeds: full, half speed (for delicate cooking such as for baking cakes) and HOLD (pulse ventilation for baking and low temperature cooking). The "HOLD utility" is also perfect for keeping food warm at the end of the cooking cycle.
- ◆ Low power cycle: for delicate cooking such as for baking cakes.
- ◆ Eco-delta: the temperature inside the cooking cell is higher than the temperature of the food and rises accordingly.
- ◆ Exhaust valve electronically controlled to evacuate the humidity excess.
- ◆ Semi-automatic cleaning cycle.
- ◆ Quick cooling: useful when passing to a type of cooking that requires a lower temperature than the previous one. It works automatically and manually.
- ◆ Manual injection of water in the cell.


- ◆ Automatic steam generator water draining with an automatic scale diagnosis system.
- ◆ HACCP management as standard: it allows the recording of the cooking programme according to H.A.C.C.P. standard (Hazard Analysis and Critical Control Points).
- ◆ By-pass technology: controls the humidity degree of the oven atmosphere in combi and regeneration cycles. It prevents water and energy waste.
- ◆ Perfect evenness: blows fresh air from outside through the bi-functional fan, which pulls the air in from the backside of the oven, after it is pre-heated and therefore guaranteeing the evenness of the cooking process.

- ◆ Single-sensor food probe.
- ◆ The cell and steam generator gas burners: GASTEC certification on high efficiency and low emissions. High efficiency cell and steam generator heat exchangers.
- ◆ Stainless steel 304 throughout, with seamless joints in the cooking cell.
- ◆ Height adjustable legs.
- ◆ Double thermo-glazed door equipped with drip pans to catch condensate and prevent slippery floor for maximum security and four holding positions allowing easier loading and unloading manoeuvres.
- ◆ Halogen lighting in the cooking cell.
- ◆ Access to main components from the front panel.
- ◆ Automatic scale diagnosis system in the steam generator to detect the presence of scale build-up.
- ◆ IPX5 water protection.
- ◆ easySteam ovens meet GASTEC safety requirements.

OPTIONAL ACCESSORIES ACCESSORIES	MODELS	
	FCZ102GBG 238503	FCZ102GBD 238513
1 GRID GN1/1 FOR 8 WHOLE CHICKENS(1.2KG)	922266	922266
2 FRYING BASKETS FOR OVENS	922239	922239
2 GRIDS GN 1/1 FOR CHICKENS (8 PER GRID)	922036	922036
AUTOMATIC WATER SOFTENER FOR OVENS	921305	921305
BANQUET RACK-51PLATES-75MM PITCH-10GN2/1	922052	922052
BASKET F. DETERGENT TANK ON SUPPORT 10GN	922212	922212
CONTROL PANEL FILTER-10 GN2/1 OVENS-LW	922247	922247
CUPB. BASE+TRAY SUPP-10 GN 2/1 OVENS LW	922254	922254
DOUBLE-CLICK CLOSING CATCH FOR OVEN DOOR	922265	922265
DRAIN KIT (D=50MM) OVENS 6&10 GN 1/1-2/1	922283	922283
EXHAUST HOOD WITH FAN FOR 10 GN2/1-LW	640794	640794
EXHAUST HOOD WITHOUT FAN FOR 10GN2/1-LW	640793	640793
EXTERNAL SIDE SPRAY UNIT	922171	922171
FAT FILTER FOR OVENS 10X1/1-2/1	922178	922178
FLUE CONDENSER FOR GAS OVENS-LW	922235	922235
FRYING GRIDDLE GN 1/1 FOR OVENS	922215	922215
FRYING GRIDDLE GN 2/3 FOR OVENS	922284	922284
HEAT SHIELD FOR 10 GN 2/1 OVENS	922252	922252
HOT CUPB.BASE+TRAY SUPP-10 GN 2/1 LW	922256	922256
KIT 4 ADJUSTABLE FEET	922012	922012
KIT HACCP EKIS	922166	922166
KIT INTEGRATED HACCP FOR OVENS	922275	922275
KIT TO CONVERT FROM LPG TO NATURAL GAS		922278
KIT TO CONVERT FROM NATURAL GAS TO LPG	922277	
NON-STICK U-PAN GN 1/1 H=20 MM	922090	922090
NON-STICK U-PAN GN 1/1 H=40 MM	922091	922091
NON-STICK U-PAN GN 1/1 H=65 MM	922092	922092
NON-STICK U-PAN GN 2/3 H=20 MM	922285	922285
OPEN BASE+TRAY SUPPORT FOR 10GN2/1 LW	922198	922198
OVEN GRILL (ALUMINIUM) GN 1/1	922093	922093
PAIR OF 1/1GN AISI 304 S/S GRIDS	922017	922017
PAIR OF 2/1 GN AISI 304 S/S GRIDS	922175	922175
PASTRY(400X600)RACK+WHEELS-80MM,10 2/1LW	922067	922067
RESIN SANITIZER FOR WATER SOFTENER	921306	921306
SLIDE-IN RACK WITH HANDLE-10 GN 2/1-LW	922047	922047
THERMAL COVER FOR 10 GN 2/1-LW	922048	922048
TRAY RACK+WHEELS 10 GN 2/1.65MM PITCH-LW	922043	922043
TRAY RACK+WHEELS 8 GN 2/1.80MM PITCH-LW	922045	922045
TRAY SUPPORT FOR OVEN BASE 10 GN 2/1-LW	922041	922041
TROLLEY FOR SLIDE-IN RACK 10 GN 2/1-LW	922042	922042
WATER FILTER FOR OVENS 0.8 L/MIN.	922186	922186



www.zanussiprofessional.com

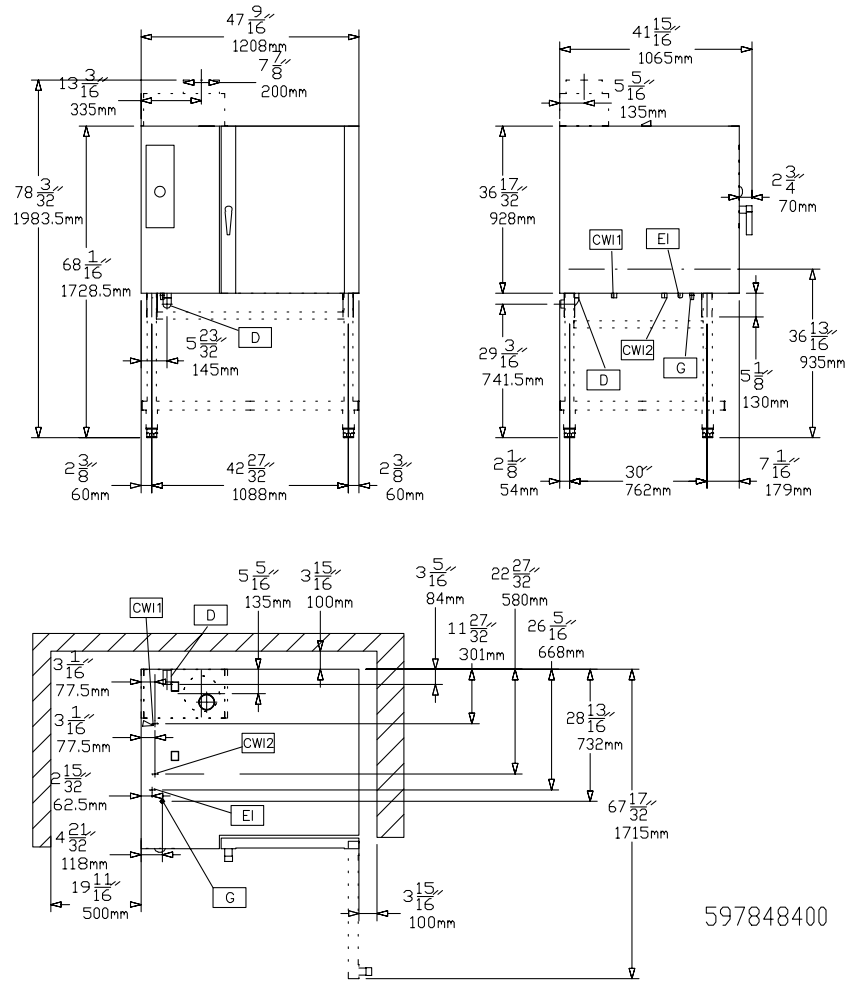

LEGEND

	FCZ102GBG 238503	FCZ102GBD 238513
CWI - Cold water inlet	3/4"	3/4"
D - Water drain	1 1/4"	1 1/4"
EI - Electrical connection	230 V, 1N, 50/60	230 V, 1N, 50/60
G - Gas connection	1/2"	1/2"
WIC - Cooling water inlet	3/4"	3/4"



www.zanussiprofessional.com

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>