

RANGE COMPOSITION

Ideal for smaller sized catering establishments: bars, pubs, fast food outlets, pizzerias and small hotels; the Snack 600 range of modular cooking appliances consists of a series of appliances each with a depth of 600 mm - in gas and electric - featuring high power for fast service whether in table top situations, where space is at a premium, or in a complete cooking installation, using the base units that can include doors, drawers or runners for gastronorm containers.



SCPE 350

SNACK 600

PASTA COOKERS **ZANUSSI** PROFESSIONAL

FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Constructed completely in 18/10, 304 AISI stainless steel to guarantee a hard-wearing performance. The units include stainless steel height adjustable feet
- ◆ Hygiene guaranteed by rounded edges, flush fit between units, side upstands and sealing joints, completely smooth and easy to clean surfaces
- ◆ Stainless steel pressed well, 15/10 in thickness, for use with 2/3 GN containers/baskets.
- ◆ Overflow and water drain by means of an overflow pipe
- ◆ Well filling by means of an overflow pipe
- ◆ False bottom, to support the baskets, supplied as standard.
- ◆ Baskets are not supplied as standard and therefore must be ordered as accessories

- ◆ All models comply with the standards required by the main international approval bodies and are **CE** marked.

ELECTRIC MODELS


- ◆ Heating via incoloy armoured steel elements placed under the well
- ◆ Thermostatic temperature control
- ◆ High limit safety thermostat

GAS MODELS


- ◆ Burners placed under the well
- ◆ Automatic piezo ignition, flame failure device and pilot light
- ◆ The gas appliances are supplied for use with natural gas, with LPG conversion jets supplied as standard.
- ◆ Tap valve.

installation diagram: B - Cold water inlet; C - Water drain

TECHNICAL DATA		
CHARACTERISTICS	MODELS	
	SCPE350 285758	SCPG350 285772
Power supply	Electric	Gas
External dimensions - mm		
width	350	350
depth	600	600
height	850	850
Usable well dimensions - mm		
width	305	305
depth	340	340
height	290	290
N° of wells	1	1
Power - kW		
gas		10
Power - kW		
installed-electric	5	
Net weight - kg.	33	35
Supply voltage	400 V, 3N, 50/60	

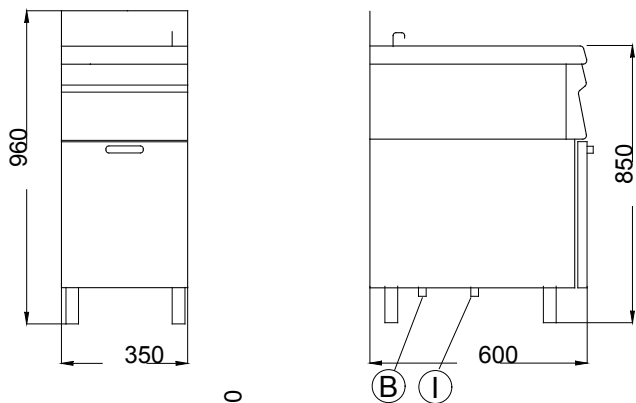

ITC-SCPE350

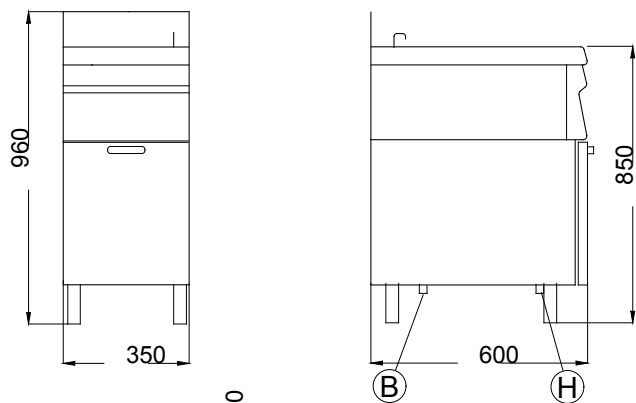

ITC-SCPG350

LEGEND

	SCPE350 285758	SCPG350 285772
H - Gas connection		1/2"
I - Electrical connection	400 V, 3N, 50/60	



OPTIONAL ACCESSORIES

ACCESSORIES	MODELS	
	SCPE350 285758	SCPG350 285772
2 GN 1/3 BASKETS FOR PASTA COOKER	285804	285804
4 GN 1/6 BASKETS FOR PASTA COOKER	285805	285805
GN 2/3 BASKET FOR PASTA COOKER	285796	285796
GULLEY WITH JOINING PANEL FOR 600 LINE	285798	285798



www.zanussiprofessional.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>