RANGE COMPOSITION

A complete and flexible range of cold rooms ideal for storing and conserving perishable food (meat, fish, cold cuts, cheese, fruit, vegetables), in addition to chilled and frozen food. Constructed in top quality, reliable materials, they are manufactured with the utmost attention paid to eliminting possible ecological damage. All models can be connected to a refrigeration unit installed directly inset on the wall of the cold room or to a remote refrigeration unit. The availability of a remote condenser unit is particularly useful when using cold rooms in environments with critical ambient temperatures, ventilation or space problems. The models detailed on this sheet are 4 freezer cold rooms with built-in refrigerating unit and with usable volume of 12 to 14 m³ with panel insulation 100 mm in thickness. All models come with panels and gas precharged cooling unit.



Shelving as access

12/14 m³ BUILT IN UNIT COLD ROOMS -10º-21ºC ZANUSSI

FUNCTIONAL AND CONSTRUCTION FEATURES

◆ Assembly system that guarantees minimal temperature loss through twin hook fasteners which allow perfect alignment of the panels. This fastener is made of high resistant composite material and guarantees perfect grip of all components that can be easely disassembled and reassembled.
◆ Wall papels and inside aciding papels are appendent.

 Wall panels and inside ceiling panels are cladded with anti-scratch prepainted galvanized steel

◆ All panels are insulated with injected polyurethane.CFC and HCFC free.

♦ All panels have PVC gaskets foamed in place to assure airtight and secure fitting. Any other sealing between panels on site is eliminated.

 Galvanized steel floor covered with a non-abrasive, non-slip, ribbed plastic coat
 Rounded internal and external corners.

 Rounded internal and external conters.
 The right-hinged door is available as standard (left-hinghed door on request) and constructed with smooth rounded profiles, cam-lift action highes, airtight magnetic door, gaskets and high insulation for saving energy and operating costs. As an option a microswitch switches on automatically the internal light and turns off the fans

◆ Newly designed handle, complete with lock has an internal safety release to prevent

entrapment when the door is accidentally locked from outside.


◆ Powerful tropicalized refrigeration system designed to operate more efficiently and without failure in the most extreme temperatures (up to 43°C).

◆ Defrosting through heated gas permits to reduce the total power installed shorten defrosting time and limited warming of the cold room.

◆ The control panel includes: luminous ON/OFF switch, internal lighting switch, cold room functioning indicator, defrosting cycle indicator, temperature and thermostat control with digital display.

♦ All models comply with the standards required by the main international approval bodies and are H marked.

| CHARACTERISTICS | MODELS | | | |
|--------------------------------------|---------------------|---------------------|---------------------|--|
| | MF12024CL 102298 | MF14028CL 102299 | MF14024CL 102313 | |
| External dimensions - mm | | | | |
| width | 2630 | 2630 | 3030 | |
| depth | 2630 | 3030 | 2630 | |
| height | 2230 | 2230 | 2230 | |
| Internal dimensions - mm | | | | |
| width | 2430 | 2430 | 2830 | |
| depth | 2430 | 2830 | 2430 | |
| height | 2030 | 2030 | 2030 | |
| Power - kW | | | | |
| installed-electric | 1.6 | 1.6 | 1.6 | |
| Noise level - dBA | 60 | 60 | 60 | |
| Net weight - kg. | 573 | 635 | 638 | |
| Power supply - V, phases, Hz | 380/400 V, 3N, 50 | 380/400 V, 3N, 50 | 380/400 V, 3N, 50 | |
| Usable surface area - m ² | 5,90 | 6,88 | 6,88 | |
| Usable volume - m ³ . | 12,0 | 14,0 | 14,0 | |
| Monobloc refrigeration unit | | | | |
| Compressor power - HP | 2,4 | 2,4 | 2,4 | |

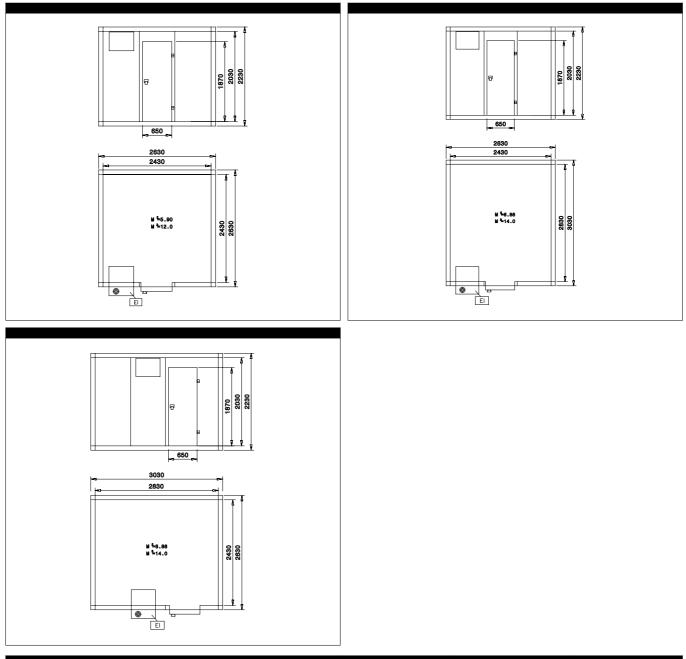

| | MF12024CL | MF14028CL | MF14024CL |
|----------------------------|-------------------|-------------------|-------------------|
| | 102298 | 102299 | 102313 |
| EI - Electrical connection | 380/400 V, 3N, 50 | 380/400 V, 3N, 50 | 380/400 V, 3N, 50 |

MODELS MF14028CL 102299

137104

102441 102025

102021

102027 881457

102026

MF14024CL 102313

137107

102441 102025

102021

102027 881457

102026





www.zanussiprofessional.com

DEBA10

ACCESSORIES

ALUM.SHELV.,POLY.TIERS-COLDROOM 243X243 ALUM.SHELV.,POLY.TIERS-COLDROOM 243X283 ALUM.SHELV.,POLY.TIERS-COLDROOM 283X243

KIT HACCP ADV.CONNECTION FOR COLD ROOMS PLASTIC CURTAIN FOR 65CM DOOR CLEARANCE PRINTER FOR HACCP BASIC VERSION REFRIG.

DOOR MICROSWITCH GRAPHIC TEMPERATURE RECORDER

PRINTER FOR TEMPERATURE RECORDER

2009-07-02

The Company reserves the right to alter technical specifications without prior notice

Download from Www.Somanuals.com. All Manuals Search And Download.

MF12024CL 102298

137103

102441 102025

102021

102027 881457

102026

Free Manuals Download Website <u>http://myh66.com</u> <u>http://usermanuals.us</u> <u>http://www.somanuals.com</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.com</u> <u>http://www.404manual.com</u> <u>http://www.luxmanual.com</u> <u>http://aubethermostatmanual.com</u> Golf course search by state

http://golfingnear.com Email search by domain

http://emailbydomain.com Auto manuals search

http://auto.somanuals.com TV manuals search

http://tv.somanuals.com