## RANGE COMPOSITION

A complete and flexible range of cold rooms ideal for storing and conserving perishable food (meat, fish, cold cuts, cheese, fruit, vegetables), in addition to chilled and frozen food. Constructed in top quality, reliable materials, they are manufactured with the utmost attention paid to eliminting possible ecological damage. All models can be connected to a refrigeration unit installed directly inset on the wall of the cold room or to a remote refrigeration unit. The availability of a remote condenser unit is particularly useful when using cold rooms in environments with critical ambient temperatures, ventilation or space problems. The models detailed on this sheet are 4 freezer cold rooms with built-in refrigerating unit and with usable volume of 4,1 to 6,1 m<sup>3</sup> with panel insulation 100 mm in thickness. All models come with panels, gas precharged cooling unit and piping.



Shelving as access

## **4.1/ 6.1 m<sup>3</sup>**

## SPLIT UNIT COLD ROOMS -10º-21ºC ZANUSS

## FUNCTIONAL AND CONSTRUCTION FEATURES

◆ Assembly system that guarantees minimal temperature loss through twin hook fasteners which allow perfect alignment of the panels. This fastener is made of high resistant composite material and guarantees perfect grip of all components that can be easely disassembled and reassembled.

 Wall panels and inside ceiling panels are cladded with anti-scratch prepainted galvanized steel

♦ All panels are insulated with injected polyurethane.CFC and HCFC free

◆ All panels have PVC gaskets foamed in place to assure airtight and secure fitting. Any other sealing between panels on site is eliminated.

 Galvanized steel floor covered with a non-abrasive, non-slip, ribbed plastic coat
Rounded internal and external corners.

 The right-hinged door is available as standard (left-hinghed door on request) and constructed with smooth rounded profiles, cam-lift action highes, airtight magnetic door, gaskets and high insulation for saving energy and operating costs. As an option a microswitch switches on automatically the internal light and turns off the fans

 Newly designed handle, complete with lock has an internal safety release to prevent entrapment when the door is accidentally locked from outside.

◆ Powerful tropicalized refrigeration system designed to operate more efficiently and without failure in the most extreme temperatures (up to 43°C).


 Prefitted and insulated pipes for connection between evaporator and condensing unit with fast connectors.

◆ Defrosting through heated gas permits to reduce the total power installed shorten defrosting time and limited warming of the cold room.

◆ The control panel includes: luminous ON/OFF switch, internal lighting switch, cold room functioning indicator, defrosting cycle indicator, temperature and thermostat control with digital display.

◆ All models comply with the standards required by the main international approval bodies and are H marked.

CHARACTERISTICS		MODELS			
	MF04112RCL 102314	MF05112RCL 102319	MF05416RCL 102315	MF06112RCL 102335	
External dimensions - mm					
width	1830	2230	1830	2630	
depth	1430	1430	1830	1430	
height	2230	2230	2230	2230	
Internal dimensions - mm					
width	1630	2030	1630	2430	
depth	1230	1230	1630	1230	
height	2030	2030	2030	2030	
Power - kW					
installed-electric	1.15	1.4	1.4	1.4	
Noise level - dBA	60	60	60	60	
Net weight - kg.	275	298	313	321	
Power supply - V, phases, Hz	230 V, 1N, 50				
Usable surface area - m <sup>2</sup>	2,00	2,50	2,66	2,99	
Usable volume - m <sup>3</sup> .	4,1	5,1	5,4	6,1	
Refrigeration unit					
Compressor power - HP	1,20	1,70	1,70	1,70	

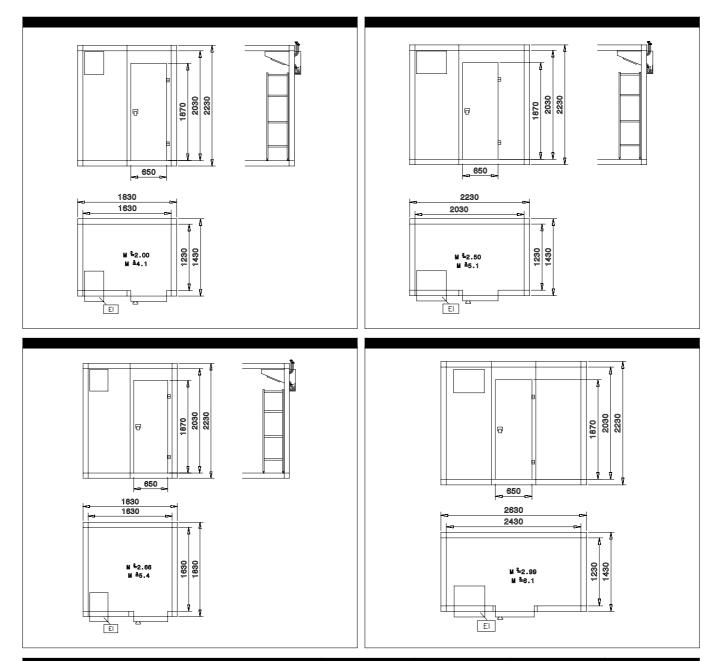

	MF04112RCL 102314	MF05112RCL 102319	MF05416RCL 102315	MF06112RCL 102335
EI - Electrical connection	230 V, 1N, 50			
RI - Remote refrigeration connection	•	•	•	•





www.zanussiprofessional.com

DEBB06

ACCESSORIES

ALUM.SHELV.,POLY.TIERS-COLDROOM 163X123 ALUM.SHELV.,POLY.TIERS-COLDROOM 163X163 ALUM.SHELV.,POLY.TIERS-COLDROOM 203X123 ALUM.SHELV.,POLY.TIERS-COLDROOM 243X123 Decommence.

KIT HACCP ADV.CONNECTION FOR COLD ROOMS

PLASTIC CURTAIN FOR 65CM DOOR CLEARANCE PRINTER FOR HACCP BASIC VERSION REFRIG.

2009-07-02

PRINTER FOR TEMPERATURE RECORDER

DOOR MICROSWITCH GRAPHIC TEMPERATURE RECORDER

The Company reserves the right to alter technical specifications without prior notice

Download from Www.Somanuals.com. All Manuals Search And Download.

MF05112RCL

102319

137095

102441

102025

102021

102027 881457

102026

, MF05416RCL

102315

137091

102441 102025

102021

102027 881457

102026

MF06112RCL

102335

137100

102441 102025

102021

102027 881457

102026

		_
	MOD	ELS

MF04112RCL

102314

137090

102441 102025

102021

102027 881457

102026

Free Manuals Download Website <u>http://myh66.com</u> <u>http://usermanuals.us</u> <u>http://www.somanuals.com</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.com</u> <u>http://www.404manual.com</u> <u>http://www.luxmanual.com</u> <u>http://aubethermostatmanual.com</u> Golf course search by state

http://golfingnear.com Email search by domain

http://emailbydomain.com Auto manuals search

http://auto.somanuals.com TV manuals search

http://tv.somanuals.com