RANGE COMPOSITION

A complete and flexible range of cold rooms ideal for storing and conserving perishable food (meat, fish, cold cuts, cheese, fruit, vegetables), in addition to chilled and frozen food. Constructed in top quality, reliable materials, they are manufactured with the utmost attention paid to eliminting possible ecological damage. All models can be connected to a refrigeration unit installed directly inset on the wall of the cold room or to a remote refrigeration unit. The availability of a remote condenser unit is particularly useful when using cold rooms in environments with critical ambient temperatures, ventilation or space problems. The models detailed on this sheet are 3 freezer cold rooms with built-in refrigerating unit and with usable volume of 12 to 14 m³ with panel insulation 100 mm in thickness. All models come with panels, gas precharged cooling unit and piping.



12/ 14 m³ SPLIT UNIT COLD ROOMS -10º-21ºC <mark>Zanussi</mark> Professional

FUNCTIONAL AND CONSTRUCTION FEATURES

 Assembly system that guarantees minimal temperature loss through twin hook fasteners which allow perfect alignment of the panels. This fastener is made of high resistant composite material and guarantees perfect grip of all components that can be easely disassembled and reassembled.
Wall panels and inside ceiling panels are

 Wan panels and inside centring panels are cladded with anti-scretch prepainted galvanized steel

♦ All panels are insulated with injected polyurethane.CFC and HCFC free

♦ All panels have PVC gaskets foamed in place to assure airtight and secure fitting. Any other sealing between panels on site is eliminated.

 Galvanized steel floor covered with a non-abrasive, non-slip, ribbed plastic coat
Rounded internal and external corners.

 Rounded internal and external conters.
The right-hinged door is available as standard (left-hinghed door on request) and constructed with smooth rounded profiles, cam-lift action highes, airtight magnetic door, gaskets and high insulation for saving energy and operating costs. As an option a microswitch switches on automatically the internal light and turns off the fans

 Newly designed handle, complete with lock has an internal safety release to prevent entrapment when the door is accidentally locked from outside.


◆ Powerful tropicalized refrigeration system designed to operate more efficiently and without failure in the most extreme temperatures (up to 43°C).


 Prefitted and insulated pipes for connection between evaporator and condensing unit with fast connectors. ◆ Defrosting through heated gas permits to reduce the total power installed shorten defrosting time and limited warming of the cold room.

◆ The control panel includes: luminous ON/OFF switch, internal lighting switch, cold room functioning indicator, defrosting cycle indicator, temperature and thermostat control with digital display.

◆ All models comply with the standards required by the main international approval bodies and are H marked.

CHARACTERISTICS		MODELS			
	MF12024RCL 102338	MF14028RCL 102339	MF14024RCL 102353		
External dimensions - mm					
width	2630	2630	3030		
depth	2630	3030	2630		
height	2230	2230	2230		
Internal dimensions - mm					
width	2430	2430	2830		
depth	2430	2830	2430		
height	2030	2030	2030		
Compressor power - HP	2.2	2.2	2.2		
Power - kW					
installed-electric	1.6	1.6	1.6		
Noise level - dBA	60	60	60		
Net weight - kg.	568	630	633		
Power supply - V, phases, Hz	380/400 V, 3N, 50	380/400 V, 3N, 50	380/400 V, 3N, 50		
Usable surface area - m ²	5,90	6,88	6,88		
Usable volume - m ³ .	12,0	14,0	14,0		

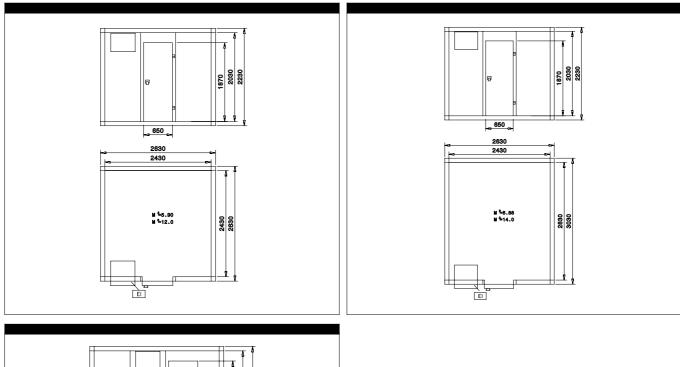



	MF12024RCL 102338	MF14028RCL 102339	MF14024RCL 102353
EI - Electrical connection	380/400 V, 3N, 50	380/400 V, 3N, 50	380/400 V, 3N, 50
RI - Remote refrigeration connection	•	•	•

MODELS MF14028RCL 102339

137104

102441 102025

102021

102027 881457

102026

MF14024RCL 102353

137107

102441 102025

102021

102027 881457

102026





www.zanussiprofessional.com

DFBB10	

ACCESSORIES

ALUM.SHELV.,POLY.TIERS-COLDROOM 243X243 ALUM.SHELV.,POLY.TIERS-COLDROOM 243X283 ALUM.SHELV.,POLY.TIERS-COLDROOM 283X243

KIT HACCP ADV.CONNECTION FOR COLD ROOMS PLASTIC CURTAIN FOR 65CM DOOR CLEARANCE PRINTER FOR HACCP BASIC VERSION REFRIG.

DOOR MICROSWITCH GRAPHIC TEMPERATURE RECORDER

PRINTER FOR TEMPERATURE RECORDER

2009-07-02

The Company reserves the right to alter technical specifications without prior notice

MF12024RCL 102338

137103

102441 102025

102021

102027 881457

102026

Free Manuals Download Website <u>http://myh66.com</u> <u>http://usermanuals.us</u> <u>http://www.somanuals.com</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.com</u> <u>http://www.404manual.com</u> <u>http://www.luxmanual.com</u> <u>http://aubethermostatmanual.com</u> Golf course search by state

http://golfingnear.com Email search by domain

http://emailbydomain.com Auto manuals search

http://auto.somanuals.com TV manuals search

http://tv.somanuals.com