RANGE COMPOSITION

A range of 400 litre refrigerators designed to satisfy the food-conservation requirements of professional caterers who want the high performance and reliability of a commercial unit but who have limited space in the kitchen. The AG I Series refrigerators have separate storage areas for different types of food and indeed separate cabinets. The range consists of white pre-painted steel models, stainless steel models, glass door models and wine models. The models detailed in this sheet are 2 black pre-painted wine refrigerators with glass door.



AG I SERIES 400LT GLASS DOOR WINE REFRIGERATOR ZANUSSI PROFESSIONAL

FUNCTIONAL AND CONSTRUCTION FEATURES

◆ Internal structure in polystyrene, external structure in black prepainted steel with the top and back in galvanised steel. Height-adjustable plastic feet.

◆ All models use CFC free R134a

High-density expanded

polyurethane insulating foam, 45 mm in thickness, with cyclopenthane injection, guarantees exceptional, long-term insulation and notable energy savings

◆ The rational use of the internal space of the refrigerator guarantees a large storage area suitable to contain 600 x 400 mm grids.

◆ A reversible self-closing door equipped with a magnetic door seal to guarantee perfect closure. 180° maximum door opening and doors stay open at 95°. All the doors are fitted as standard with locks and keys.

CHARACTERISTICS	MODELS	
	R04P6SRB 730900	R04P6SWB 730901
Operating temperature - min/max °C	4/19	4/19
Operating mode	Static	Static
External material		
panels	Prepainted Steel	Prepainted Steel
door	Glass	Glass
Internal material		
panels	Polystyrene	Polystyrene
Gross capacity (D.I.N. 8952) - I.	400	400
External dimensions - mm		
width	703	703
depth/with open doors	619, 1310	619, 1310
height	1640	1640
Internal dimensions - mm		
width	610	610
depth	435	435
height	1450	1450
Min/Max internal humidity - %	70	70
Door hinges	Right Side	Right Side
N° and type of grids (included)	3, 600x400	3, 600x400
Compressor power - HP	1/5	1/5
Refrigerant type	R134a	R134a
Refrigerant quantity - g.	210	210
Refrigeration power - W	156	156
Power - kW		
installed-electric	0.21	0.21
Internal light	•	•
Noise level - dBA	<55	<55
Net weight - kg.	89	89
Power supply - V, phases, Hz	230 V, 1N, 50	230 V, 1N, 50
INCLUDED ACCESSORIES		
3 RILSAN GRIDS FOR 400L WINE REFRIG.	1	
KIT 3 WOODEN SHELVES FOR 400L WINE REFR.		1

 Designed to operate at ambient temperatures of up to 38° C.
High standards of hygiene and ease of cleaning are guaranteed by the white thermoformed polystyrene internal cell with rounded internal corners of the cabinet and thermoformed runners (excluded fish and wine models) for an easy and safe positioning of the grids. CFC and HCFC free; electromagnetic compatibility according to the EN 55014 and EN 55104 standards.
All models comply with the standards required by the main

international approval bodies and are CE marked.



ACCESSORIES	MODELS		
	R04P6SRB 730900	R04P6SWB 730901	
3 RILSAN GRIDS FOR 400L WINE REFRIG.	880131	880131	
INCLINATED RILSAN SHELF- 400L WINE REFR.	880138	880138	
KIT 3 WOODEN SHELVES FOR 400L WINE REFR.	880187		




www.zanussiprofessional.com

DAG03 2009-07-03

The Company reserves the right to alter technical specifications without prior notice

400LT GLASS DOOR WINE REFRIGERATOR AG I SERIES

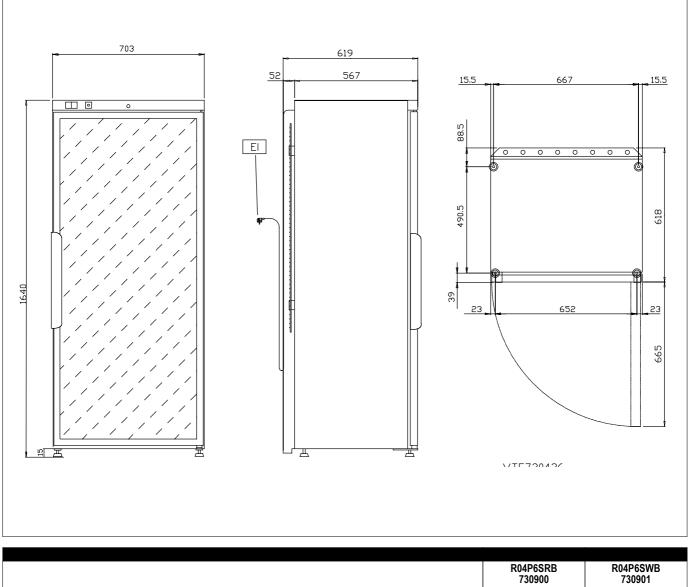

	R04P6SRB 730900	R04P6SWB 730901
EI - Electrical connection	230 V, 1N, 50	230 V, 1N, 50



www.zanussiprofessional.com

DAG03

2009-07-03

Free Manuals Download Website <u>http://myh66.com</u> <u>http://usermanuals.us</u> <u>http://www.somanuals.com</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.com</u> <u>http://www.404manual.com</u> <u>http://www.luxmanual.com</u> <u>http://aubethermostatmanual.com</u> Golf course search by state

http://golfingnear.com Email search by domain

http://emailbydomain.com Auto manuals search

http://auto.somanuals.com TV manuals search

http://tv.somanuals.com