

## RANGE COMPOSITION

The range consists of 25 models of refrigerated tables with a capacity varying from 265 to 560 litres that offer excellent standards in terms of performance and efficiency. These models are available with built in or remote refrigerating unit, various combinations of doors and drawers and with no worktop, flat top or top with splashback. The models detailed on this sheet are refrigerated tables with a capacity of 265 litres and with a built in refrigerating unit.



726139

## AU SERIES

### 265 LT REFRIGERATED TABLES **ZANUSSI** PROFESSIONAL

## FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Internal and external doors, front and side panels and removable worktop in 304 AISI stainless steel (excluding model RCSN2M24).
- ◆ External back in galvanized steel.
- ◆ The removable top is made in 304 AISI and is 50 mm in thickness (models RCSN2M2, RCSN2M12, RCSN2M2U).
- ◆ High-density expanded cyclopentane insulating foam, 50 mm in thickness guarantees exceptional, long-term insulation and notable energy savings.
- ◆ Legs (150 mm high) in 304 AISI stainless steel with plastic interior - adjustable in height.
- ◆ Evaporator foamed in the backside protected from acids.
- ◆ Digital control panel allowing the easy and precise setting and control of the internal temperature.


CHARACTERISTICS	MODELS				
	RCSN2M2 726139	RCSN2M2T 726668	RCSN2M12 726140	RCSN2M2U 726182	RCSN2M24 727006
Operating temperature - min/max °C	-2/10	-2/10	-2/10	-2/10	-2/10
Operating mode	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Type of stainless steel					
external	304 AISI	304 AISI	304 AISI	304 AISI	Stainless Steel
Gross capacity (D.I.N. 8952) - l.	265	265	265	265	265
Control type	Digital	Digital	Digital	Digital	Digital
External dimensions - mm					
width	1238	1234	1238	1238	1238
depth/with open doors	700, 1102	700, 1102	700, 1102	700, 1102	700, 1102
height	850	800	850	950	850
Internal dimensions - mm					
width	365	365	365	365	365
depth	580	580	580	580	580
height	543	543	543	543	543
Upstand				●	
Without worktop		●			
Top material	304 AISI	Galvanized Steel	304 AISI	304 AISI	Stainless Steel
Min/Max internal humidity - %	55	55	55	55	55
N° of drawers			2x1/2		
Door hinges	1 Left+1 Right	1 Left+1 Right	Right Side	1 Left+1 Right	1 Left+1 Right
N° defrost in 24 hrs.	every 6 hours	every 6 hours	every 6 hours	every 6 hours	every 6 hours
Refrigerant type	R404a	R404a	R404a	R404a	R404a
Refrigerant quantity - g.	130	130	130	130	130
Refrigeration power - W	343	343	343	343	343
Power - kW					
installed-electric	0.34	0.34	0.34	0.34	0.34
Noise level - dBA	58.5	58.5	58.5	58.5	58.5
Net weight - kg.	119	114	126	120	119
Power supply - V, phases, Hz	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50
<b>INCLUDED ACCESSORIES</b>					
1/1 GN GREY "RILSAN" GRID	2	2	1	2	2

- ◆ Completely automatic defrosting and automatic evaporation of defrosting water by hot gas.
- ◆ Operating temperature: -2/+10°C.
- ◆ High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners and easily removable supports and grids.
- ◆ Self-closing door, in positions less than 90°, equipped with a door seal to guarantee perfect closure.
- ◆ Refrigerant gas R404a.
- ◆ Possibility to install on socket.
- ◆ Kit 1/2 drawers available as accessory.
- ◆ The refrigeration unit can operate in tropical climates (+43°C ambient temperature).
- ◆ CFC and HCFC free.

ACCESSORIES	MODELS				
	RCSN2M2 726139	RCSN2M2T 726668	RCSN2M12 726140	RCSN2M2U 726182	RCSN2M24 727006
KIT 2 S/S GRIDS GN1/1 FOR REFRIG. TABLES	880139	880139	880139	880139	880139
KIT 4 WHEELS (2 W/BRAKE)+4 (40MM) SPACERS	880025	880025	880025	880025	880025
KIT DOOR REVERSIBILITY FOR REF. TABLES	880046	880046	880046	880046	880046
KIT HACCP EKIS	922166	922166	922166	922166	922166
KIT INTEGRATED HACCP-DIG. REFR. (IR33)	880205	880205	880205	880205	880205
LOCK KIT	880024	880024	880024	880024	880024
PLASTIC CONTAINER GN 1/1 H=150 MM	881040	881040	881040	881040	881040
PLASTIC CONTAINER GN 1/1 H=65 MM	881038	881038	881038	881038	881038
PRINTER FOR HACCP BASIC VERSION REFRIG.	881457	881457	881457	881457	881457
S/S STRUCTURE TO SUPPORT 6 GRIDS (R+L)	880140		880140	880140	880140
STRUCTURE TO SUPPORT 3 GRIDS (RIGHT+LEFT)	880047	880047	880047	880047	880047
TWO ½ DRAWER KIT	880023	880023	880023	880023	880023




www.zanussiprofessional.com

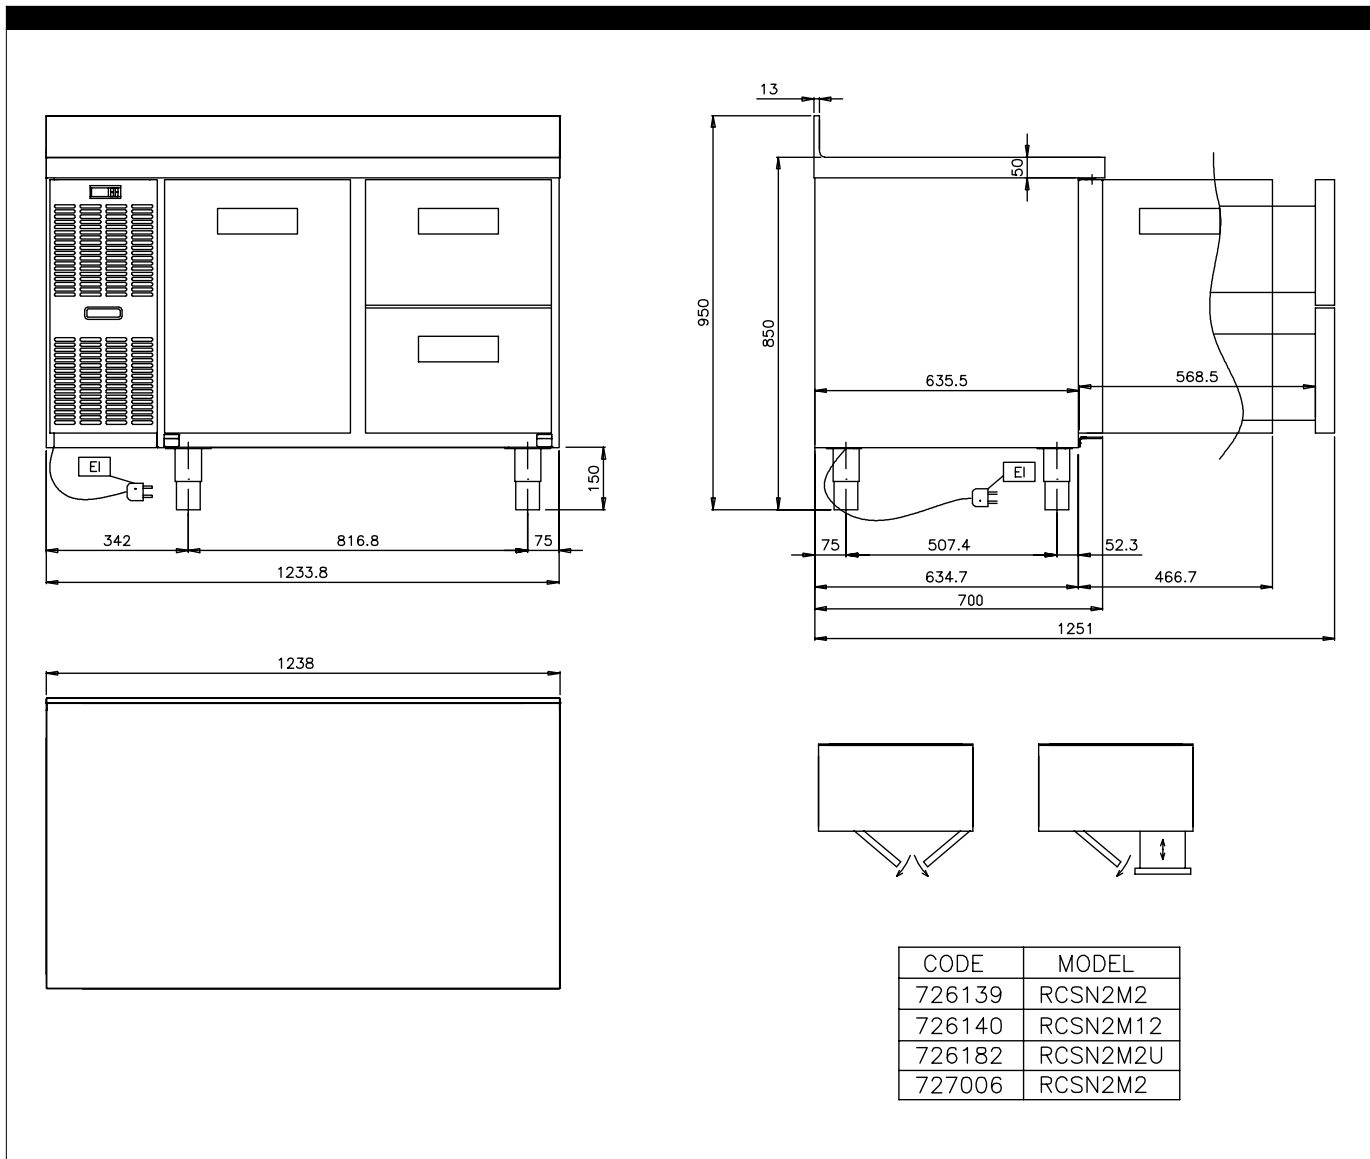

	RCSN2M2 726139	RCSN2M12 726140	RCSN2M2U 726182	RCSN2M24 727006
EI - Electrical connection	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50



www.zanussiprofessional.com

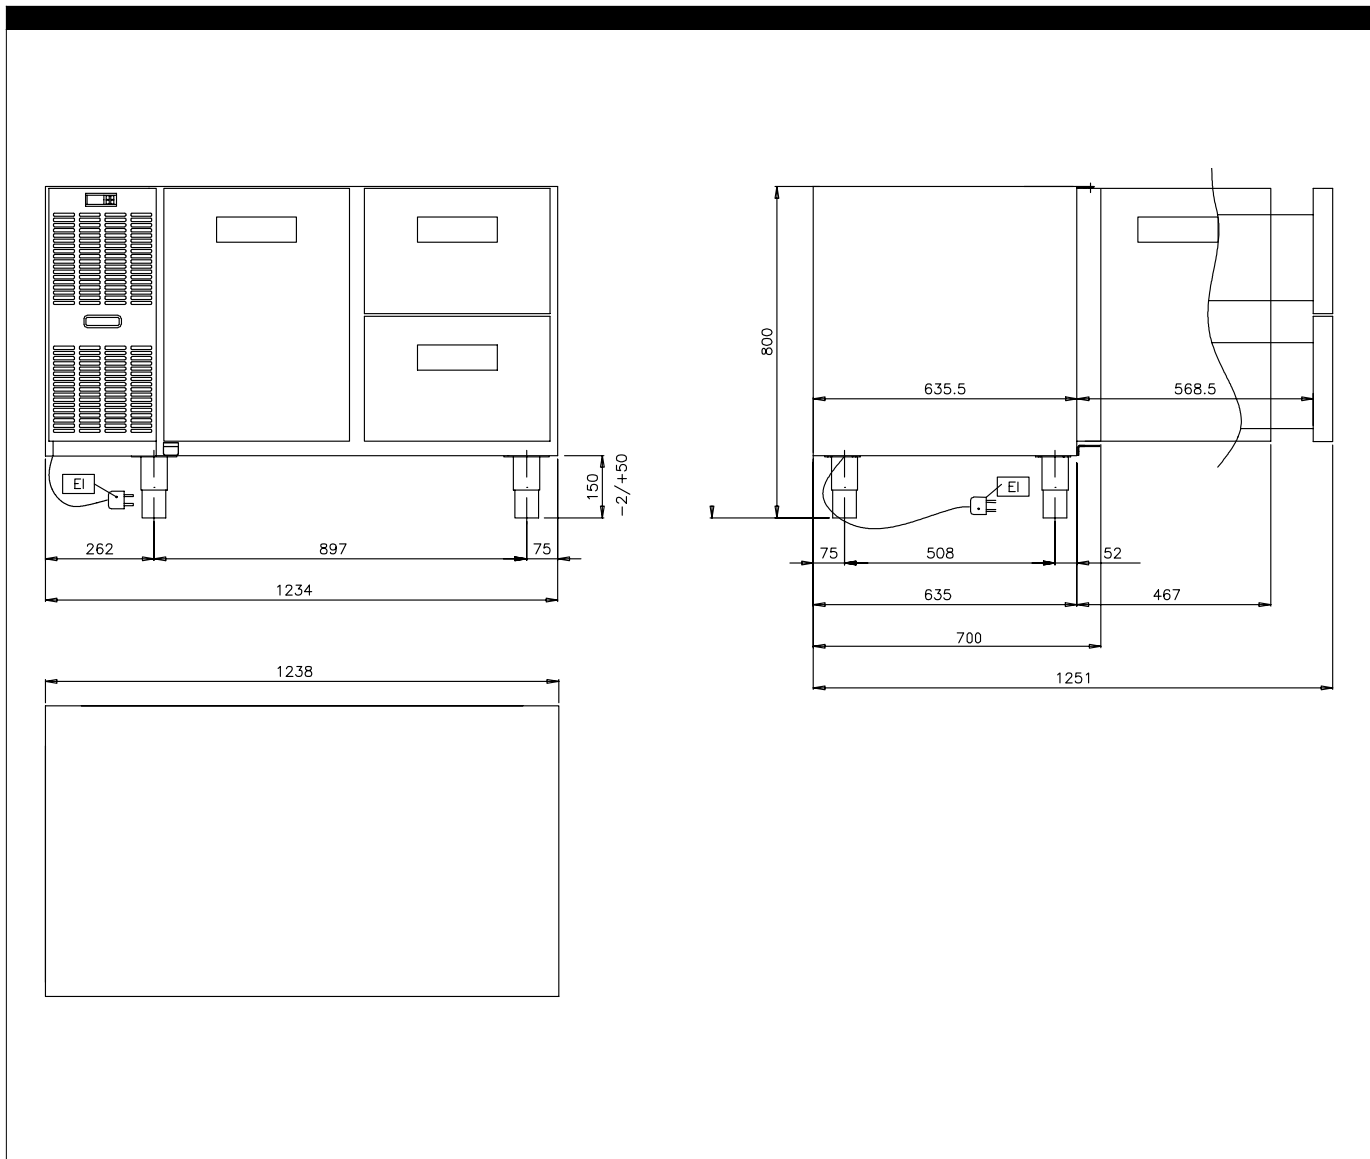

	<b>RCSN2M2T</b> <b>726668</b>
El - Electrical connection	230 V, 1N, 50



www.zanussiprofessional.com

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>