

## RANGE COMPOSITION

The range consists of 7 fan assisted models of 1300 litres refrigeration cabinets that offer excellent standards in terms of performance and efficiency. These models come in fridge, positive and negative versions, with a choice of materials (304 AISI, 430 AISI or white painted steel) and are available with full doors.

Model RS13DX2F is constructed with two separate cells (650+650 litres) with different range of temperature.



726475

## AU SERIES

# 1300 LT DIGITAL REFRIGERATORS

**ZANUSSI**  
PROFESSIONAL

## FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Internal and external structure in 304 AISI, 430 AISI or white painted steel, top and back in galvanized steel. 150 mm high - adjustable feet.
- ◆ Digital control panel allowing the easy and precise setting and control of the internal temperature.
- ◆ Completely automatic defrosting and automatic evaporation of defrost water (304 AISI models), manual emptying of defrost water (430 AISI models).
- ◆ High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet and easily removable runners and grids (without the use of tools).
- ◆ The refrigeration unit can operate in tropical climates (+43°C ambient temperature)
- ◆ Excellent forced air cooling system that ensures the utmost uniformity of temperature in the cabinet and guarantees a perfect storage quality of the goods.
- ◆ High-density expanded polyurethane insulating foam, 60 mm in thickness, with cyclopentane injection, guarantees exceptional,

long-term insulation and notable energy savings.


| CHARACTERISTICS                          | MODELS             |                    |                    |                    |                    |                    |                                       |
|--|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|---------------------------------------|
|  | RS13P42F<br>726462 | RS13PX2F<br>726459 | RS13RX2F<br>726321 | RS13PW2F<br>726475 | RS13DX2F<br>726335 | RS13R32F<br>726467 | RS13RX4H<br>727157                    |
| Operating temperature                    |                    |                    |                    |                    |                    |                    |                                       |
| first compartment - min/max °C           | 0 / 10             | 0 / 10             | -2 / 10            | 0 / 10             | -2 / 10            | -2 / 10            | -2 / 10                               |
| second compartment - min/max °C          |                    |                    |                    |                    | -2 / 10            |                    |                                       |
| Operating mode                           | Ventilated         | Ventilated         | Ventilated         | Ventilated         | Ventilated         | Ventilated         | Ventilated                            |
| Type of stainless steel                  |                    |                    |                    |                    |                    |                    |                                       |
| external                                 | Stainless Steel    | 304 AISI           | 304 AISI           | Prepainted Steel   | 304 AISI           | 304 AISI           | Stainless Steel AISI 304 Scotch Brite |
| internal                                 | Stainless Steel    | 304 AISI           | 304 AISI           | Stainless Steel    | 304 AISI           | 304 AISI           | Stainless Steel AISI 304 Scotch Brite |
| Gross capacity (D.I.N. 8952) - l.        | 1300               | 1300               | 1300               | 1300               | 650, 650           | 1300               | 1300                                  |
| External dimensions - mm                 |                    |                    |                    |                    |                    |                    |                                       |
| width                                    | 1440               | 1440               | 1440               | 1440               | 1440               | 1440               | 1440                                  |
| depth/with open doors                    | 788, 1440          | 788, 1440          | 788, 1440          | 788, 1440          | 788, 1440          | 788, 1440          | 788, 1450                             |
| height                                   | 2000               | 2000               | 2000               | 2000               | 2000               | 2000               | 2000                                  |
| Min/Max internal humidity - %            | 85                 | 85                 | 78                 | 85                 | 68                 | 78                 | 78                                    |
| N° and type of door                      | 2                  | 2                  | 2                  | 2                  | 2                  | 2                  | 4x1/2                                 |
| Door hinges                              | 1 Left+1 Right     | 1 Left+1 Right     | 1 Left+1 Right     | 1 Left+1 Right     | 1 Left+1 Right     | 1 Left+1 Right     | 2 Left+2 Right                        |
| N° and type of grids (included)          | 6, GN 2/1          | 6, GN 2/1          | 6, GN 2/1          | 6, GN 2/1          | 6, GN 2/1          | 6, GN 2/1          | 8, GN 2/1                             |
| N° defrost in 24 hrs.                    | 4                  | 4                  | 4/20'              | 4                  | 4/20'              | 4/20'              | 4/20'                                 |
| Refrigerant type                         | R134a              | R134a              | R134a              | R134a              | R134a              | R134a              | R134a                                 |
| Refrigerant quantity - g.                | 310                | 310                | 310                | 310                | 130, 130           | 310                | 310                                   |
| Refrigeration power - W                  | 791                | 791                | 791                | 791                | 663                | 791                | 791                                   |
| Power - kW                               |                    |                    |                    |                    |                    |                    |                                       |
| installed-electric                       | 0.464              | 0.464              | 0.445              | 0.464              | 0.66               | 0.445              | 0.445                                 |
| Internal light                           |                    |                    |                    |                    | ●                  | ●                  |                                       |
| Net weight - kg.                         | 217                | 217                | 217                | 217                | 250                | 217                | 217                                   |
| Power supply - V, phases, Hz             | 230 V, 1, 50       | 230 V, 1, 50       | 230 V, 1, 50       | 230 V, 1, 50       | 230 V, 1, 50       | 230 V, 1, 50       | 230 V, 1, 50                          |
| <b>INCLUDED ACCESSORIES</b>              |                    |                    |                    |                    |                    |                    |                                       |
| 2 S/S RUNNERS FOR 600-650/1300-1400L.REF | 6                  | 6                  | 6                  | 6                  | 6                  | 6                  |                                       |
| 2 S/S SIDE RUNNERS FOR 600-1300L REFRIG. |                    |                    |                    |                    |                    |                    | 8                                     |
| 2/1 GN GREY "RILSAN" GRID                | 6                  | 6                  | 6                  | 6                  | 6                  | 6                  | 8                                     |

- ◆ The rational use of the internal space of the refrigerator guarantees a large storage area suitable to contain 2/1 GN grids.
- ◆ Reversible self-closing door, in positions less than 90°, with a stop at 95° and a maximum opening at 180°, equipped with a magnetic door seal to guarantee perfect closure. The pressed stainless steel recessed door handle without joints makes opening the cabinet extremely easy. All the doors are fitted as standard with locks and keys and a microswitch to switch off the fan when the door is opened.
- ◆ Stainless steel feet (plastic interior).
- ◆ A wide range of optional accessories are available.
- ◆ CFC and HCFC free.
- ◆ All models comply with the standards required by the main international approval bodies and are H marked.

| ACCESSORIES                              | MODELS             |                    |                    |                    |                    |                    |                    |
|--|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
|  | RS13P42F<br>726462 | RS13PX2F<br>726459 | RS13RX2F<br>726321 | RS13PW2F<br>726475 | RS13DX2F<br>726335 | RS13R32F<br>726467 | RS13RX4H<br>727157 |
| 2 S/S RUNNERS FOR 600-650/1300-1400L.REF | 881456             | 881456             | 881456             | 881456             | 881456             | 881456             |                    |
| 2 S/S SIDE RUNNERS FOR 600-1300L REFRIG. |                    |                    |                    |                    |                    |                    | 880557             |
| 2 WHEELS FOR REFRIGERATORS/REFRIG.TABLES | 880539             | 880539             | 880539             | 880539             | 880539             | 880539             | 880539             |
| 2/1 GN AISI 304 S/S GRID                 | 881067             | 881067             | 881067             |                    | 881067             | 881067             | 881067             |
| 2/1 GN GREY "RILSAN" GRID                | 880720             | 880720             | 880720             | 880720             | 880720             | 880720             | 880720             |
| 3 RILSAN CENTR.GRIDS-2 DOOR REF/FREEZERS | 880211             | 880211             | 880211             | 880211             |                    | 880211             |                    |
| ENERGY FREE ALARM DEVICE                 | 881089             | 881089             | 881089             | 881089             |                    |                    | 881089             |
| KIT HACCP EKIS                           | 922166             | 922166             | 922166             | 922166             | 922166             | 922166             | 922166             |
| KIT INTEGRATED HACCP-DIG. REFR. (IR33)   | 880205             | 880205             | 880205             | 880205             | 880205             | 880205             | 880205             |
| KIT TO FIT 11 PASTRY TRAYS (400X600 MM)  | 881031             | 881031             | 881031             | 881031             |                    | 881031             | 881031             |
| MEAT RAIL FOR 650-1400 L REFRIGERATORS   | 881451             | 881451             | 881451             | 881451             | 881451             | 881451             |                    |
| PRINTER FOR HACCP BASIC VERSION REFRIG.  | 881457             | 881457             | 881457             | 881457             | 881457             | 881457             | 881457             |



www.zanussiprofessional.com

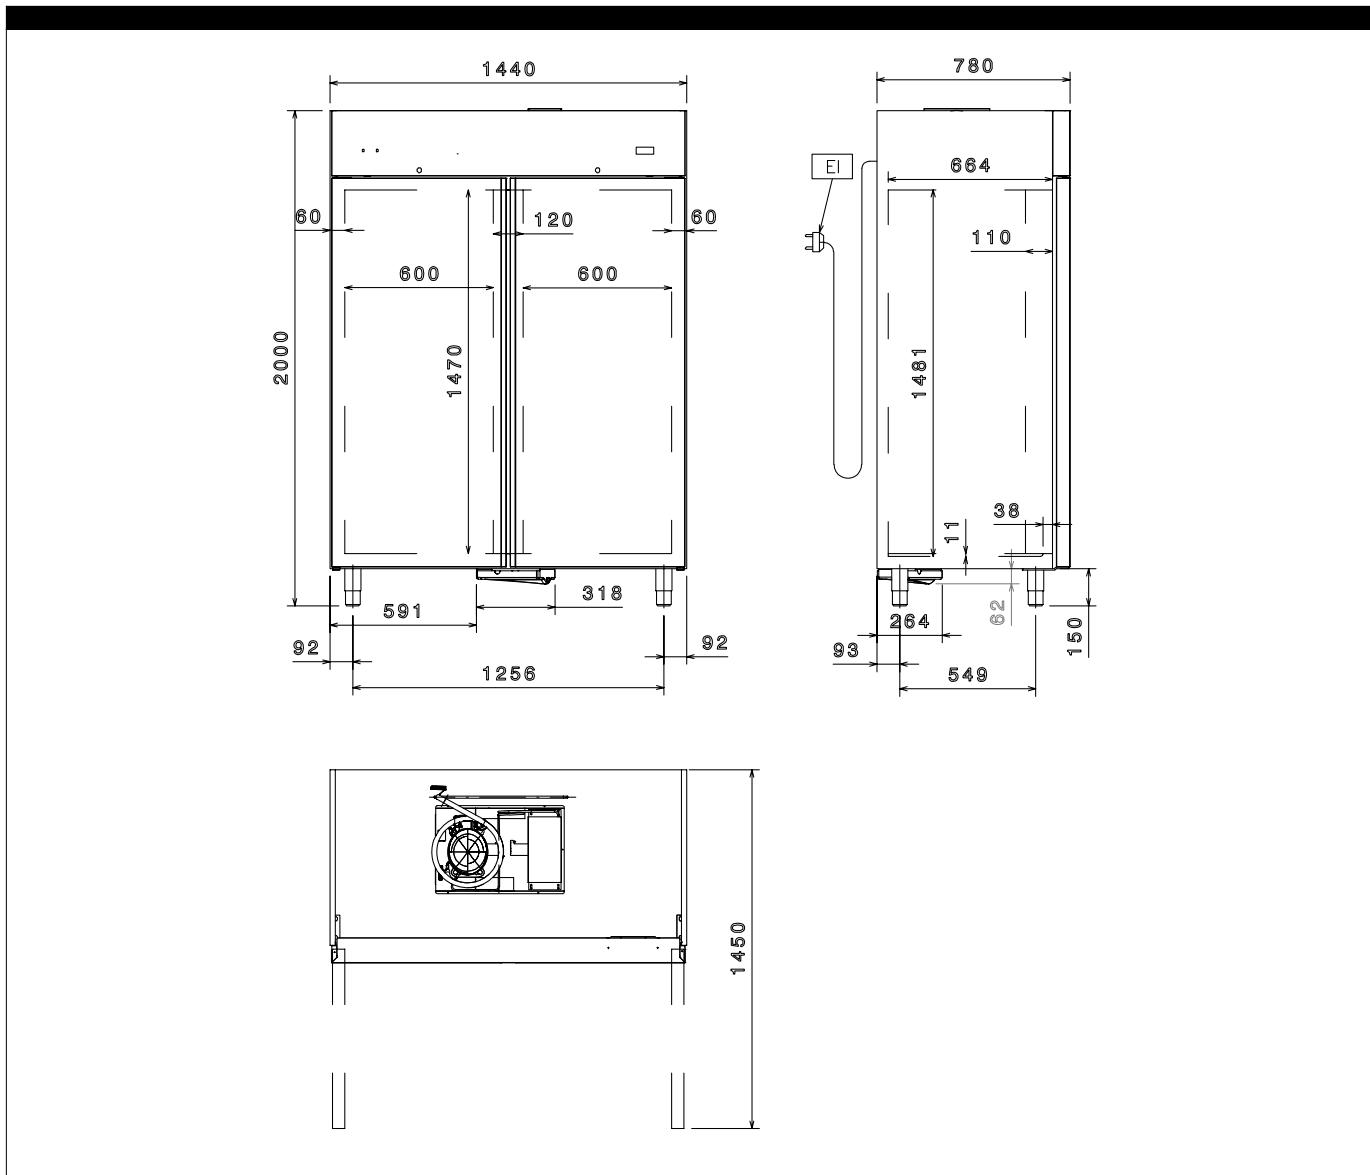

|                            | RS13P42F<br>726462 | RS13PX2F<br>726459 | RS13RX2F<br>726321 | RS13PW2F<br>726475 | RS13DX2F<br>726335 | RS13R32F<br>726467 |
|----------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| EI - Electrical connection | 230 V, 1, 50       | 230 V, 1, 50       | 230 V, 1, 50       | 230 V, 1, 50       | 230 V, 1, 50       | 230 V, 1, 50       |



www.zanussiprofessional.com

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>