

RANGE COMPOSITION

A range of central hoods used for snack applications and on the N700 and N900 Series cooking units. Their particular profile and the limited installation height makes them suitable for use in places with low ceilings. The range consists of hoods with 6 different lengths (2000, 2400, 2800, 3200, 3600 and 4000 mm) and a depth 2000 mm.



MASTER - MV line - 2000 mm





430 AISI CENTRAL TYPE HOODS **ZANUSSI** PROFESSIONAL

FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Constructed entirely in 430 AISI stainless steel.
- ◆ Labyrinth filters in 430 AISI stainless steel easily removable for cleaning. Labyrinth filters guarantee constant filtration to avoid clogging and protect against fire.

- ◆ Powerful internal fan(s) 550 W.
- ◆ Central drain pipe with drain hole to transfer grease into a 304 AISI container.
- ◆ External panels with upturned edges to avoid injuries.
- ◆ Blind panels in 304 AISI stainless steel for a correct exhaustion.
- ◆ The outlet holes are sized in order to minimize drops in pressure.
- ◆ Pressure gauging for perfect calibration.
- ◆ Condensate collection tray in 304 AISI stainless steel.
- ◆ Eyebolts and screw anchors for ceiling installation.
- ◆ Prearranged for installation of lighting.

TECHNICAL DATA						
CHARACTERISTICS	MODELS					
	MCV2020BT 642316	MCV2024BT 642317	MCV2028BT 642318	MCV2032BT 642005	MCV2036BT 642153	MCV2040BT 642154
External dimensions - mm						
width	2000	2400	2800	3200	3600	4000
depth	2000	2000	2000	2000	2000	2000
height	500	500	500	500	500	500
Air Capacity - mc/h	7600	7600	7600	7600	7600	7600
Built-in fan - power W	550	550	550	550	550	550
Power - kW						
installed-electric	1.1	1.1	1.1	1.1	1.1	1.1
Net weight - kg.	71	80	89	98	107	116
Supply voltage	220/240 V, 1N, 50/60	220/240 V, 1N, 50/60	220/240 V, 1N, 50/60	220/240 V, 1N, 50/60	220/240 V, 1N, 50/60	220/240 V, 1N, 50/60
INCLUDED ACCESSORIES						
304 S/S BLIND PANEL 400X500H MM					2	2
430 S/S LABYRINTH FILTER H=500 MM	6	8	10	12	12	14

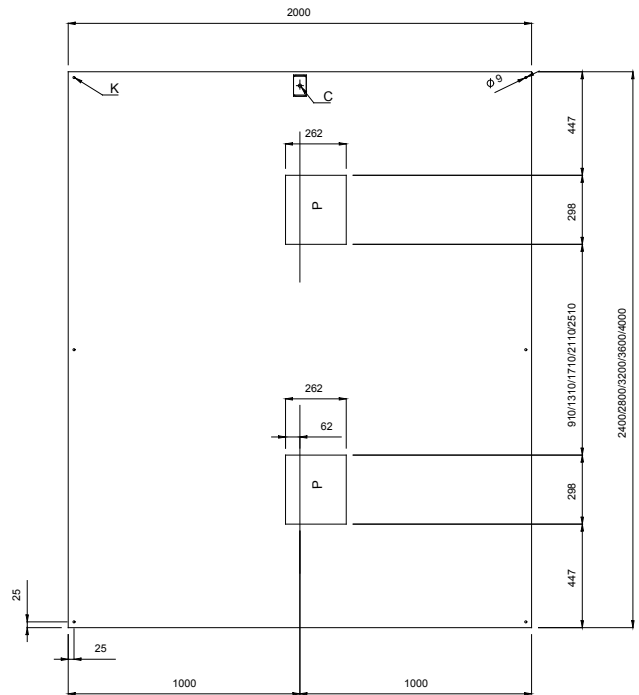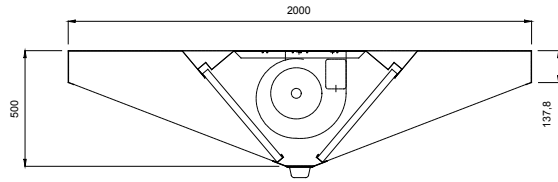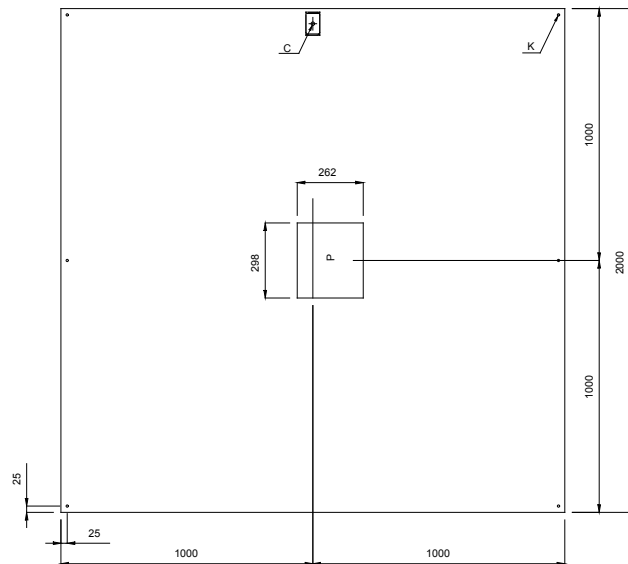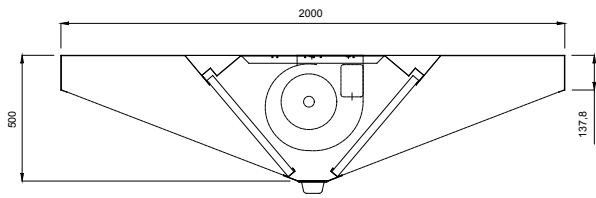

LEGEND

	MCV2020BT 642316	MCV2024BT 642317	MCV2028BT 642318	MCV2032BT 642005	MCV2036BT 642153	MCV2040BT 642154
I - Electrical connection	220/240 V, 1N, 50/60	220/240 V, 1N, 50/60	220/240 V, 1N, 50/60	220/240 V, 1N, 50/60	220/240 V, 1N, 50/60	220/240 V, 1N, 50/60



OPTIONAL ACCESSORIES

ACCESSORIES	MODELS					
	MCV2020BT 642316	MCV2024BT 642317	MCV2028BT 642318	MCV2032BT 642005	MCV2036BT 642153	MCV2040BT 642154
27-WATT LIGHTING FIXTURE W/1 LAMP-IP 65	680804	680804			680804	680804
36-WATT LIGHTING FIXTURE W/1 LAMP-IP 65			680805	680805	680805	680805
DRAIN FOR HOODS DIAM.1/2"(M) WITH PLUG	640409	640409	640409	640409	640409	640409
SPEED VARIATOR FOR MOTORS UP TO 1.7 KW	640686	640686	640686	640686	640686	640686



www.zanussiprofessional.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>