

JB-DVF-HID

Vandal Resistant Color Video Door Station
With Built in Proximity Card Reader

- INSTRUCTIONS-

The JB-DVF-HID is a JB-series color video door station and an HID ProxPoint Plus Card Reader, built onto the same stainless steel faceplate. The card reader provides electronic access to a building through a separate Access Control System, which is not supplied by Aiphone.

INSTALLATION:

1. For flush mounting, cut hole in wall and use supplied back box.
Box dimensions are 4- $\frac{1}{2}$ "W x 10- $\frac{3}{8}$ "H x 1- $\frac{3}{4}$ "D.
2. For surface mounting, use the SBX-DVF-P surface mount box.
This box can mount to a standard 1- gang box or to any flat surface.

JB-DVF-HID
(front view)



JB-DVF-HID
(back view)



Connecting the Reader to the Host:


Connect the reader to the host according to the wiring table below and the host installation guide.

Wiegand	Wire Color
+ DC (5-16V)	Red
Ground	Black
Data0	Green
Data1	White
Shield Ground	Drain
Green LED	Orange
Red LED	Brown
Beeper	Yellow
Hold	Blue
Card Present	Violet



← 20" pigtail cable

WIRING DIAGRAM:

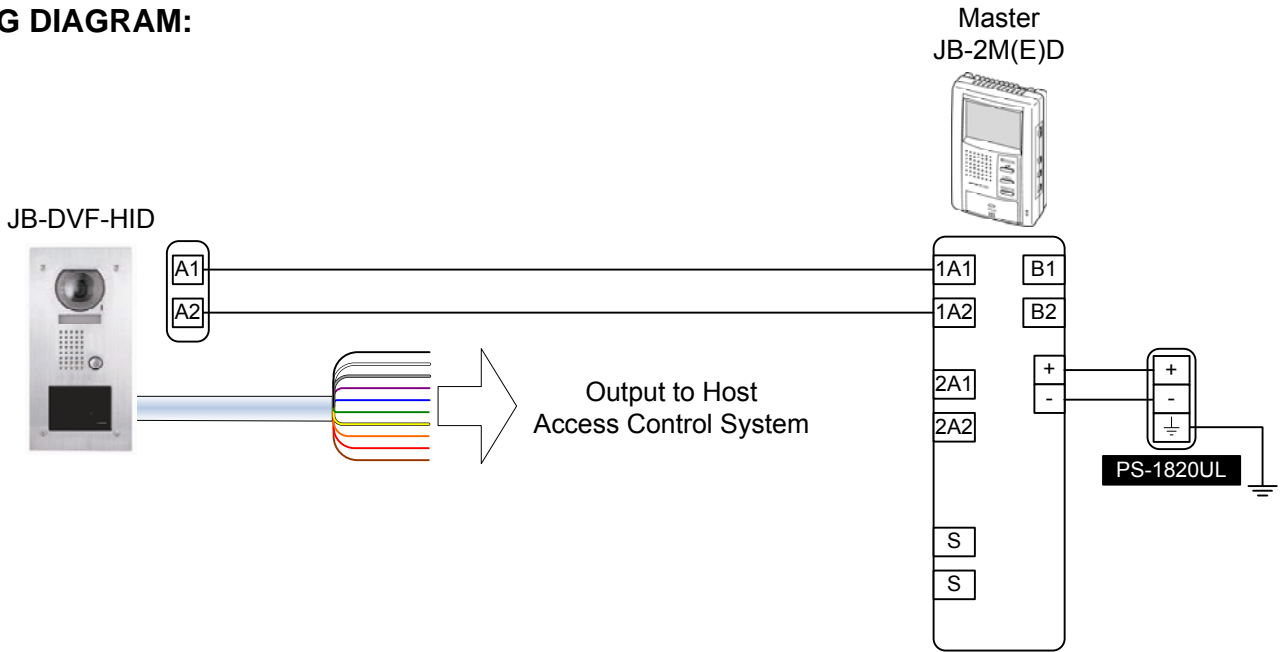

TESTING AND OPERATION:

- When power is applied to the card reader, the LED will flash green three (3) times while the beeper beeps simultaneously. The LED will then turn red. This indicates that the microcontroller is operating properly.
- Present an ID card to the reader. (Hold card directly in front of reader.) The LED will momentarily turn green while the beeper beeps once, indicating that the card was read successfully.

SPECIFICATIONS:

CARD READER:

Power Source: 5 ~ 16V DC
Absolute Max. Voltage: 18V DC
Current Requirements: 30mA (Avg); 75mA (peak)
Terminations: Color-coded pre-wired pigtail
Wiring Distance: 500'
Operating Temperature: -10°~60°C / 14°~140°F
Operating Humidity: 0-95% relative humidity
non-condensing

CAMERA:

Camera unit: CCD Camera
Scanning line: 525 lines
Min. illumination: 5 Lux at 1' or less
Terminations: Screw terminals
Wiring Distance: 330' w/871802 wire
980' w/JBW-BA & 851602 wire
Dimensions(camera): 5-3/4" W x 11-5/8" H x 1-5/16" D
With SBX-DVF-P: 5-15/16" W x 11-3/4" H x 2-13/16" D (Top)
1-15/16" D (Bottom)

FCC WARNING:

This device complies with Part 15 of the FCC rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference that may cause undesired operation.
 - For proper regulatory compliance, the drain wire should be disconnected at the power supply end of the cable.
 - Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
 - The Reader is intended to be powered from a limited power source output of a previously certified power supply.

Aiphone Communication Systems
1700 130th Ave. N.E.
Bellevue, WA 98005
(425) 455-0510
FAX (425) 455-0071

TOLL FREE TECHNICAL SUPPORT: (800) 692-0200
TOLL FREE FAX LINE: (800) 832-3765
E-MAIL: tech-serv@aiphone.com

Pg. 2
JB-DVF-HID Instr.
0706JDJS

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>