






MODEL #
FC104

FREQUENCY RESPONSE
150Hz-17kHz

SENSITIVITY
94dB (1W/1M)

Installation must comply with all Building Codes and NFPA guidelines. Installation must adhere to N.E.C. and NFPA 70/72 wiring directives and comply with all National and Local Building Codes.

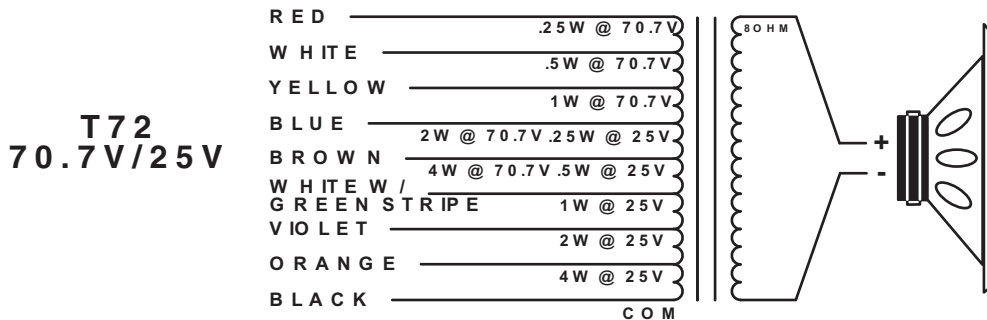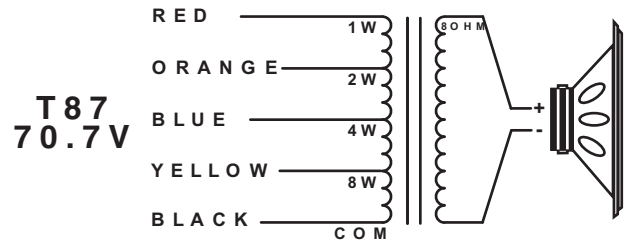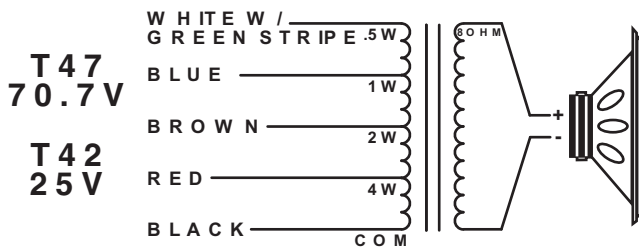

Speaker must be installed with UL Listed Baffles: 51-4. Speaker must be installed with UL Listed Enclosures: 96-4, 96-4X



**Atlas
Sound**

Specifications are subject to change without notice

AtlasSound.com

1601 JACK MCKAY BOULEVARD ENNIS, TEXAS 75119 U.S.A.
©2005 ATLAS SOUND LP

Printed in U.S.A.

00105

• TELEPHONE: (800) 876-3333 • FAX: (800) 765-3435

ATS001890 RevB 01/05

PN 490201

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>