# KENWOOD

# KDC-BT358U KDC-BT318U

**CD-RECEIVER** 

# INSTRUCTION MANUAL

AMPLI-TUNER LECTEUR DE CD

# MODE D'EMPLOI

REPRODUCTOR DE DISCOS COMPACTOS RECEPTOR DE FM/AM

# MANUAL DE INSTRUCCIONES

**JVCKENWOOD Corporation** 

Take the time to read through this instruction manual.

Familiarity with installation and operation procedures will help you obtain the best performance from your new CD-receiver.

# For your records

Record the serial number, found on the back of the unit, in the spaces designated on the warranty card, and in the space provided below. Refer to the model and serial numbers whenever you call upon your Kenwood dealer for information or service on the product. Model KDC-BT318U Serial number \_\_\_\_\_\_

**US Residents Only** 

# **Register Online**

Register your Kenwood product at www.Kenwoodusa.com

# CONTENTS

BEFORE USE	2
BASICS	3
GETTING STARTED	4
RADIO	5
CD / USB / iPod	6
AUX	8
Pandora® (for KDC-BT318U)	8
iHeartRadio® (for KDC-BT318	<b>U</b> )9
BLUETOOTH®	10
AUDIO SETTINGS	15
DISPLAY SETTINGS	16
MORE INFORMATION	16
TROUBLESHOOTING	17
SPECIFICATIONS	19
INSTALLATION / CONNECTION	20

# How to read this manual

- Operations are explained mainly using buttons on the faceplate.
- [XX] indicates the selected items.
- (→ XX) indicates references are available on the stated page.

# **BEFORE USE**

# **A** Warning

Do not operate any function that takes your attention away from safe driving.

### **A** Caution

### Volume setting:

- Adjust the volume so that you can hear sounds outside the car to prevent accidents.
- Lower the volume before playing digital sources to avoid damaging the speakers by the sudden increase of the output level.

### General:

- Avoid using the USB device or iPod/iPhone if it might hinder safe driving.
- Make sure all important data has been backed up. We shall bear no responsibility for any loss of recorded data.
- Never put or leave any metallic objects (such as coins or metal tools) inside the unit, to prevent a short circuit.
- If a disc error occurs due to condensation on the laser lens, eject the disc and wait for the moisture to evaporate.

### Remote control (RC-406):

- Do not leave the remote control in hot places such as on the dashboard.
- The Lithium battery is in danger of explosion if replaced incorrectly. Replace it only with the same or equivalent type.
- The battery pack or batteries shall not be exposed to excessive heat such as sunshine, fire or the like.
- Keep the battery out of reach of children and in its original packaging when not in used. Dispose of used batteries promptly. If swallowed, contact a physician immediately.


### Maintenance

Cleaning the unit: Wipe off dirt on the faceplate with a dry silicone or soft cloth.

**Cleaning the connector:** Detach the faceplate and clean the connector gently with a cotton swab, being careful not to damage the connector.

# **Handling discs:**


- Do not touch the recording surface of the disc.
- Do not stick tape etc. on the disc, or use a disc with tape stuck on it.
- Do not use any accessories for the disc.
- Clean from the center of the disc and move outward.
- Clean the disc with a dry silicone or soft cloth. Do not use any solvents.
- When removing discs from this unit, pull them out horizontally.
- Remove burrs from the center hole and disc edge before inserting a disc.




Connector (on the reverse side of the faceplate)


# **BASICS**

# Volume knob (turn/press) Loading slot Display window KENWOOD KENWOOD FIST 10 (BORDER BRIEFE SENS BRIEFE SENS BRIEFE REST 10 (BORDER BRIEFE SENS BRIEFE KENWOOD FIST 11 (BORDER BRIEFE SENS BRIEFE KENWOOD FIST 11 (BORDER BRIEFE SENS BRIEFE KENWOOD FIST 11 (BORDER BRIEFE KENWOOD FIST 12 (BORDER BRIEFE KENWOOD FIST 13 (BORDER BRIEFE KENWOOD FIST 14 (BORDER BRIEFE FIST 13 (BORDER BRIEFE KENWOOD FIST 14 (BORDER BRIEFE FIST 13 (BORDER BRIEFE FIST 14 (BORDER BRIEFE FIST 14 (BORDER BRIEFE FIST 15 (BORDER BRIE



Your preset adjustments will also be erased.





То	Do this (on the faceplate)	Do this (on the remote control)
Turn on the power	Press () <b>SRC</b> . • Press and hold to turn off the power.	Press and hold <b>SRC</b> to turn off the power. (Pressing <b>SRC</b> does not turn on the power.)
Adjust the volume	Turn the volume knob.	Press <b>VOL</b> ✓ or <b>VOL</b> ✓.
		Press <b>ATT</b> during playback to attenuate the sound.  • Press again to cancel.
Select a source	Press () <b>SRC</b> repeatedly.	Press <b>SRC</b> repeatedly.
Change the display information*	Press <b>DISP SCRL</b> repeatedly.  • Press and hold to scroll the current display information.	( not available )

<sup>\*</sup> For KDC-BT358U: You can also select to turn off the display information by pressing **DISP SCRL** repeatedly.

# **GETTING STARTED**





# **Cancel the demonstration**

When you turn on the power (or after you reset the unit), the display shows: "CANCEL DEMO" → "PRESS" → "VOLUME KNOB"

- 1 Press the volume knob.
  [YES] is selected for the initial setup.
- **2** Press the volume knob again. "DEMO OFF" appears.



# Set the clock

- 1 Press the volume knob to enter [FUNCTION].
- 2 Turn the volume knob to select [CLOCK], then press the knob.
- 3 Turn the volume knob to select [CLOCK ADJUST], then press the knob.
- 4 Turn the volume knob to make the settings, then press the knob. Day → Hour → Minute
- 5 Turn the volume knob to select [CLOCK FORMAT], then press the knob.
- **6** Turn the volume knob to select [12H] or [24H], then press the knob.
- 7 Press and hold Q / ← to exit.

To return to the previous setting item or hierarchy, press  $\mathbb{Q}/\mathbb{Z}$ .

While in clock display screen...

Press and hold **DISP SCRL** to enter clock adjustment mode directly.

Then, perform step 4 to set the clock.



# **Set the initial settings**

- 1 Press () SRC to enter STANDBY.
- 2 Press the volume knob to enter [FUNCTION].
- 3 Turn the volume knob to make a selection (see the following table), then press the knob.
- 4 Press and hold Q / ⇒ to exit.


To return to the previous setting item or hierarchy, press  $\mathbf{Q}/\mathbf{\Delta}$ .

Default: XX

	Default. M
<b>AUDIO CONTROL</b>	
SWITCH PREOUT	<u>REAR</u> / <b>SUB-W</b> : Selects whether rear speakers or a subwoofer are connected to the line out terminals on the rear (through an external amplifier).
SP SELECT	<u>OFF</u> / $5/4/6 \times 9/6/$ <b>OEM</b> : Selects according to the speaker size (5 inches or 4 inches, $6\times9$ inches or 6 inches) or OEM speakers for optimum performance.
DISPLAY	
EASY MENU*1	<ul><li>ON: Both display and button illumination change to white color when entering [FUNCTION].;</li><li>OFF: Both display and button illumination remain as [COLOR SELECT] color. (→ 16)</li></ul>
TUNER SETTING	
PRESET TYPE	<b>NORMAL</b> : Memorizes one station for each preset button in each band (FM1/ FM2/ FM3/ AM).; <b>MIX</b> : Memorizes one station for each preset button, regardless of the selected band.
SYSTEM	
KEY BEEP	<u>ON</u> : Activates the keypress tone.; OFF: Deactivates.
SOURCE SELECT	
PANDORA SRC*2	<u>ON</u> : Enables PANDORA in source selection. ; <b>OFF</b> : Disables. (→ 8)
IHEART SRC*2	<u>ON</u> : Enables IHEARTRADIO in source selection. ; <b>OFF</b> : Disables. (→ 9)
BUILT-IN AUX	<u>ON</u> : Enables AUX in source selection. ; <b>OFF</b> : Disables. (→ 8)
CD READ	<u>1</u> : Automatically distinguishes between audio file disc and music CD.; <b>2</b> : Forces to play as an music CD. No sound can be heard if an audio file disc is played.
F/W UPDATE	
UPDATE SYSTEM	N/ UPDATE BT
F/W UP xx.xx	<b>YES</b> : Starts upgrading the firmware. ; <u>NO</u> : Cancels (upgrading is not activated). For details on how to update the firmware, see: www.kenwood.com/cs/ce/
*1 F KBA BT	25011 *2 F KDO BT04011

<sup>\*1</sup> For KDC-BT358U , \*2 For KDC-BT318U

# **RADIO**

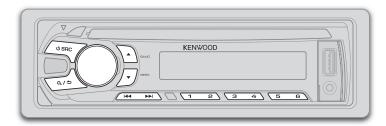

### **Search for a station**

- 1 Press () SRC to select TUNER.
- 2 Press ▲ BAND repeatedly (or press \*AM- / #FM+ on RC-406) to select FM1/ FM2/ FM3/ AM.
- 3 Press | ◄ ✓ / ▶ ► | (or press | ◄ ✓ / ▶ ► | (+) on RC-406) to search for a station.
- To change the searching method for I → I: Press
   ▼ SEEK repeatedly.

**AUTO1:** Automatically search for a station.

**AUTO2:** Search for a preset station.

MANUAL: Manually search for a station.

- To store a station: Press and hold one of the number buttons (1 to 6).
- To select a stored station: Press one of the number buttons (1 to 6) (or press one of the number buttons (1 to 6) on RC-406).

# **Direct Access Tuning (using RC-406)**

- 1 Press **DIRECT** to enter Direct Access Tuning.
- 2 Press the number buttons to enter a frequency.
- 3 Press ENT ▶ | | to search for a station.
- If no operation is done for 10 seconds after step **2**, Direct Access Tuning is automatically canceled.

# **Other settings**

- 1 Press the volume knob to enter [FUNCTION].
- 2 Turn the volume knob to make a selection (see the following table), then press the knob.
- 3 Press and hold  $Q / \triangle$  to exit.

To return to the previous setting item or hierarchy, press  $\mathbb{Q}/\mathbb{Z}$ .

Default: XX

TUNER SETTING	
AUTO MEMORY	<b>YES</b> : Automatically starts memorizing 6 stations with good reception. ; <u>NO</u> : Cancels. (Selectable only if [NORMAL] is selected for [PRESET TYPE].) (→ 4)
MONO SET	<b>ON</b> : Improves the FM reception, but the stereo effect may be lost.; <b>OFF</b> : Cancels.
For KDC-BT358	zu:
TI	<b>ON</b> : Allows the unit to temporarily switch to Traffic Information. ; <b>OFF</b> : Cancels.
PTY SEARCH	Selects the available Program Type (see below), then, press I ✓ ✓ / ► ► I to start.
CLOCK	
TIME SYNC	<u>ON</u> : Synchronizes the unit's time to the Radio Broadcast Data System station time. ; <b>OFF</b> : Cancels.

- [MONO SET]/ [TI]/ [PTY SEARCH] is selectable only when the band is FM1/ FM2/ FM3.
- Available Program Type:
   SPEECH: NEWS, INFORM (information), SPORTS, TALK, LANGUAGE, REL TALK (religious talk), PERSNLTY (personality), PUBLIC, COLLEGE, HABL ESP (spanish talk), WEATHER MUSIC: ROCK, CLS ROCK (classic rock), ADLT HIT (adult hits), SOFT RCK (softrock), TOP 40, COUNTRY, OLDIES, SOFT, NOSTALGA (nostalgia), JAZZ, CLASSICL (classical), R & B (rhythm and blues), SOFT R&B (soft rhythm and blues), REL MUSC (religious music), MUSC ESP (spanish music), HIP HOP

The unit will search for the Program Type categorized under [SPEECH] or [MUSIC] if selected.


• For KDC-BT358U: If the volume is adjusted during reception of traffic information or alarm, the adjusted volume is memorized automatically. It will be applied the next time traffic information or alarm function is turned on.

# CD / USB / iPod


# **Start playback**

The source changes automatically and playback starts.


### CD



### **USB**



### iPod/iPhone



KCA-iP102 (optional accessory) or accessory cable of the iPod/iPhone\*1

Press **5 iPod** to select the control mode while in iPod source.

MODE ON: From the iPod\*2.

MODE OFF: From the unit.



То	Do this
Pause or resume playback	Press 6 ► II (or press ENT ► II on RC-406).
Select a track/file	Press $  \blacktriangleleft   / \triangleright \triangleright  $ (or press $  \blacktriangleleft   / \triangleright \triangleright  $ (+) on RC-406).
Select a folder *3	Press $\blacktriangle$ / $\blacktriangledown$ (or press *AM- / #FM+ on RC-406).
Reverse/ Fast-forward	Press and hold  ◄◄ / ▶► (or press and hold  ◄◄ / ▶► (+) on RC-406).
Repeat play *4	Press <b>4</b> $\bigcirc$ repeatedly.
	<ul> <li>Audio CD: TRACK REPEAT, REPEAT OFF</li> <li>MP3/WMA/WAV file or iPod: FILE REPEAT, FOLDER REPEAT, REPEAT OFF</li> <li>KENWOOD Music Editor Light (KME Light)/ KENWOOD Music Control (KMC) file (→ 16): FILE REPEAT, REPEAT OFF</li> </ul>
Random play *4	Press <b>3</b> ∕<\$ repeatedly.
	<ul> <li>Audio CD: DISC RANDOM, RANDOM OFF</li> <li>MP3/WMA/WAV file or iPod or KME Light/ KMC file: FOLDER RANDOM, RANDOM OFF</li> </ul>
_	Press and hold 3

- \*1 Do not leave the cable inside the car when not using.
- \*2 You can still play/pause, file skip, fast-forward or reverse files from the unit.
- \*3 Only for MP3/WMA/WAV files. This does not work for iPod.
- \*4 For iPod: Applicable only when [MODE OFF] is selected.
- \*5 For CD: Only for MP3/WMA files.

If you connect the iPod/iPhone to the USB input terminal of the unit (while listening to Tuneln Radio, Tuneln Radio Pro or Aupeo), the unit will output the sound from these apps.

### Select a track/file from a list

For iPod: Applicable only when [MODE OFF] is selected. (→ 6)

- 1 Press Q/★.
- 2 Turn the volume knob to make a selection, then press the knob.
  - MP3/WMA/WAV file: Select the desired folder, then a file.
  - iPod or KME Light/ KMC file: Select the desired file from the list (PLAYLISTS, ARTISTS, ALBUMS, SONGS, PODCASTS\*, GENRES, COMPOSERS\*).
  - \* Only for iPod.
- To return to the root folder (or first file), press number button **5 iPod**.
- To return to the previous setting item or hierarchy, press Q / ★.
- To cancel, press and hold  $\mathbb{Q}/\mathbb{Z}$ .

If you have many files....

You can search through them quickly (on step **2** above) at a preset skip search ratio by pressing |◄◄ / ▶►|.

- See also "Set the skip search ratio."
- Pressing and holding I◄◄ / ►►I skip songs at the maximum ratio (10%) regardless of the setting made.
- For USB: Only for files registered in the database created with KME Light/ KMC.
- Not applicable for audio CD.

# **Direct Music Search (using RC-406)**

- 1 Press DIRECT.
- 2 Press the number buttons to enter a track/ file number.
- 3 Press **ENT** ▶ **||** to search for music.
- Not available if Random Play is selected.
- Not applicable for iPod, KME Light/ KMC file.

# Select a song by name

While listening to iPod...

- 1 Press Q/**△**.
- 2 Turn the volume knob to select a category, then press the knob.
- 3 Turn the volume knob quickly to enter character search.
- 4 Turn the volume knob to select the character to be searched for.
- 5 Press | ◀ ✓ / ▶ ▶ | to move to the entry position.

You can enter up to 3 characters.

- **6** Press the volume knob to start searching.
- 7 Turn the volume knob to make a selection, then press the knob.

Repeat step **7** until the desired item is selected.

- To search for a character other than A to Z and 0 to 9, enter only "★".
- To return to the previous hierarchy, press
   Q /△.
- To return to the top menu, press number button 5 iPod.
- To cancel, press and hold  $\mathbb{Q}/\mathbb{Z}$ .

# Set the skip search ratio

While listening to iPod or KME Light/ KMC file...

- 1 Press the volume knob to enter [FUNCTION].
- 2 Turn the volume knob to select [USB], then press the knob.
- 3 Turn the volume knob to select [SKIP SEARCH], then press the knob.
- 4 Turn the volume knob to make a selection, then press the knob.
  0.5% (default)/ 1%/ 5%/ 10%: Skip search ratio over the total files.

# **Change the USB drive**

When a smartphone (Mass Storage Class) is connected to the USB input terminal, you can select its internal memory or external memory (such as an SD card) to playback the stored songs. You can also select the desired drive to playback when a multiple drives device is connected.

Press **5 iPod** repeatedly to select the desired drive.

(or)

- 1 Press the volume knob to enter [FUNCTION].
- 2 Turn the volume knob to select [USB], then press the knob.
- 3 Turn the volume knob to select [MUSIC DRIVE], then press the knob.
- 4 Press the volume knob to select [DRIVE CHANGE].

The next drive is selected automatically.

Repeat steps 1 to 4 to select the following drives.

Selectable items: [DRIVE 1] to [DRIVE 5]


# **AUX**

# **Preparation:**

Select [ON] for [BUILT-IN AUX]. (→ 4)

# **Start listening**

1 Connect a portable audio player (commercially available).



- 2 Press () SRC to select AUX.
- 3 Turn on the portable audio player and start playback.

# **Set the AUX name**

While listening to a portable audio player connected to the unit...

- 1 Press the volume knob to enter [FUNCTION].
- 2 Turn the volume knob to select [SYSTEM], then press the knob.
- 3 Turn the volume knob to select [AUX NAME SET], then press the knob.
- 4 Turn the volume knob to make a selection, then press the knob. AUX (default)/ DVD/ PORTABLE/ GAME/ VIDEO/ TV
- 5 Press and hold  $Q/\Rightarrow$  to exit.

# Pandora® (for KDC-BT318U)


# **Preparation:**

Install the latest version of the Pandora application onto your device (iPhone/iPod touch), then create an account and log in to Pandora.

• Select [ON] for [PANDORA SRC]. (→ 4)

# **Start listening**

- 1 Open the Pandora application on your device.
- 2 Connect your device to the USB input terminal.



The source changes to PANDORA and broadcast starts.

\* Do not leave the cable inside the car when not using.

То	Do this
Pause or resume playback	Press <b>6</b> ▶ <b>   </b> (or press <b>ENT</b> ▶ <b>   </b> on RC-406).
Thumbs up or thumbs down	<ul> <li>Press ▲ ♠ / ▼ ♥.</li> <li>If thumbs down is selected, the current track is skipped.</li> </ul>
Skip a track	Press ►► (or press ►► (+) on RC-406).
Create a new 1 station 2	Press and hold the volume knob. Turn the volume knob to select [FROM TRACK] or [FROM ARTIST], then press the knob. A new station is created based on the current song or artist.
Save a station	Press and hold one of the number buttons (1 to 5) to store.  • To select a stored station, press one of the number buttons (1 to 5).
Search for a registered 2 station	make a selection, then press the knob (or press ▲ / ▼ on RC-406). [BY DATE]: According to the registered date. [A-Z]: Alphabetical order.

# iHeartRadio® (for KDC-BT318U)


### **Preparation:**

Install the latest version of iHeart Link for KENWOOD application onto your device (iPhone/ iPod touch), then create an account and log in to iHeartRadio.

• Select [ON] for [IHEART SRC]. (→ 4)

# **Start listening**

- 1 Open the iHeart Link application on your device.
- 2 Connect your device to the USB input terminal.



- 3 Press () SRC to select IHEARTRADIO. Broadcast starts automatically.
- \* Do not leave the cable inside the car when not using.

То	Do this
Pause or resume playback	Press 6 ►     (or press ENT ►     on RC-406).
Thumbs up or thumbs down for custom station	Press ▲ ♣ / ▼ ♥.  If thumbs down is selected, the current track is skipped.
Skip a track for custom station	Press ►► (or press ►► (+) on RC-406).
Create a new/ custom station	Press 1.
Add to favorite stations for live station	Press 2.
Scan for live station	Press 5.

### Search for a station

- 1 Press Q/★.
- 2 Turn the volume knob to select a category, then press the knob.
- 3 Turn the volume knob to the desired station, then press the knob.

When a city list appears, you can skip cities in alphabetical order.

(or using RC-406) -

Press  $\triangle$  /  $\nabla$  to search for a station.

To cancel, press and hold  $\mathbb{Q}/\mathbb{L}$ .

# Skip cities by alphabetical order

While a city list appears during search...

- 1 Turn the volume knob quickly to enter character search.
- 2 Turn the volume knob or press | ◀ ◀ / ▶ ▶ | to select the character to be searched for.
- 3 Press ▲ / ▼ to move to the previous/next page.
- 4 Press the volume knob to start searching.

To cancel, press and hold  $\mathbb{Q}/\mathbb{Z}$ .

# **Delete a station**

While listening to IHEARTRADIO...


- 1 Press the volume knob to enter [FUNCTION].
- 2 Turn the volume knob to select [SYSTEM], then press the knob.
- 3 Turn the volume knob to select [STATION DEL], then press the knob.
- 4 Turn the volume knob to select [LIVE] or [CUSTOM], then press the knob.
- 5 Turn the volume knob to select the desired station to delete, then press the knob.
- **6** Turn the volume knob to select [YES], then press the knob.
- 7 Press and hold Q / → to exit.

To return to the previous setting item or hierarchy, press  $\mathbb{Q}/\mathbb{Z}$ .

# **BLUETOOTH®**

You can operate Bluetooth devices using this unit.

# **Connect the microphone**



If you turn off the unit or detach the control panel during a phone call conversation, the Bluetooth connection is disconnected. Continue the conversation using your mobile phone.

# **Supported Bluetooth profiles**

- Hands-Free Profile (HFP)
- Serial Port Profile (SPP)
- Phonebook Access Profile (PBAP)
- Object Push Profile (OPP)
- Advanced Audio Distribution Profile (A2DP)
- Audio/Video Remote Control Profile (AVRCP)

### Pair a Bluetooth device

When connecting a Bluetooth device to the unit for the first time, perform pairing between the unit and the device. Once the pairing is completed, the Bluetooth device will remain registered in the unit even if you reset the unit.

- Up to five devices can be registered (paired) in total.
- A maximum of two Bluetooth phones and one Bluetooth audio device can be connected at any time.
- This unit supports Secure Simple Pairing (SSP).
- Some Bluetooth devices may not automatically connect to the unit after pairing. Connect the device to the unit manually. Refer to the instruction manual of the Bluetooth device for more information.
- 1 Press () SRC to turn on the unit.
- 2 Search and select this unit model name (KDC-BT3\*\*U) on the Bluetooth device. "PAIRING" → "PASS XXXXXX" → Device name → "PRESS" → "VOLUME KNOB" scrolls on the display.
- **3** Press the volume knob to start pairing.
  "PAIRING OK" appears when pairing is completed and "BT" will light up when the Bluetooth connection is established.
- For some Bluetooth devices, you may need to enter the Personal Identification Number (PIN) code immediately after searching.
- Pairing request (via Bluetooth) is automatically activated if an iPhone/iPod touch is connected through the USB input terminal. (Applicable only if [AUTO PAIRING] is set to [0N].) (→ 14)
   Press the volume knob to pair once you have confirm the device name.

# **Bluetooth test mode**

You can check the connectivity of the supported profile between the Bluetooth device and the unit.

- Make sure there is no Bluetooth device connected.
- 1 Press and hold ... "PLEASE PAIR YOUR PHONE" appears.
- 2 Search and select this unit model name (KDC-BT3\*\*U) on the Bluetooth device.
- **3** Operate the Bluetooth device to confirm pairing. "TESTING" flashes on the display.

# The connectivity result (OK or NG) appears after the test.

PAIRING: Pairing status

HF CNT: Hands-Free Profile (HFP) compatibility

AUD CNT: Advanced Audio Distribution Profile (A2DP) compatibility

PB DL: Phonebook Access profile (PBAP) compatibility

• To cancel check mode, press and hold  $\circlearrowleft$  **SRC** to turn off the unit.

# **Bluetooth mobile phone**

То	Do this
Receive a call	<ul> <li>Press or the volume knob or one of the number buttons (1 to 6) (or press on RC-406).</li> <li>All the button illumination flash when there is an incoming call.</li> <li>When [AUTO ANSWER] is set to the selected time, the unit answers incoming call automatically. (→ 11)</li> </ul>
Reject an incoming call	Press ( ) <b>SRC</b> (or press <b>n</b> on RC-406).
End a call	Press or USRC (or press on RC-406).
Switch between hands-free and private talk modes	<ul> <li>Press 6 ► II during a call.</li> <li>Operations may vary according to the connected Bluetooth device.</li> </ul>
Adjust the phone volume	<ul> <li>Turn the volume knob during a call.</li> <li>Phone volume: [00] to [35] (Default: [15])</li> <li>This adjustment will not affect the volume of the other sources.</li> </ul>
Switch between two connected phones	Press repeatedly.  Not applicable during a call.

# Improve the sound quality during a call

While talking on the phone...

- 1 Press the volume knob to enter [FUNCTION].
- 2 Turn the volume knob to make a selection (see the following table), then press the knob.
- 3 Press and hold  $Q/\Rightarrow$  to exit.

To return to the previous setting item or hierarchy, press  $\mathbf{Q}/\mathbf{\Delta}$ .

Default: XX

MIC GAIN	$-20 -\!\!\!\!- +8$ (0): The sensitivity of the microphone increases as the number increased.
NR LEVEL	-5 — $-20$ ( $-10$ ): Adjust the noise reduction level until the least noise is being heard during a phone conversation.
ECHO CANCEL	<b>1</b> — <b>10</b> ( $\underline{\bf 4}$ ): Adjust the echo cancellation delay time until the least echo is being heard during a phone conversation.

# **Text message notification**

When the phone receives a text message, the unit rings and "SMS RECEIVED" appears.

- You cannot read, edit, or send a message through the unit.
- To clear the message, press any button.

# **Use Voice Recognition**

- 1 Press and hold to activate Voice Recognition.

  The connected phone (which has been paired the earliest) is activated.

  However, if priority device is connected, pressing and holding activate the priority device. (→ 13, DVC PRIORITY)
- 2 Speak the name of the contact you want to call or the voice command to control the phone functions.
- Supported Voice Recognition features vary for each phone. Refer to the instruction manual of the connected phone for details.
- This unit also supports the intelligent personal assistant function of iPhone.

### **BLUETOOTH®**

# **Bluetooth mode operations**

- 1 Press **?** to enter Bluetooth mode.
- 2 Turn the volume knob to make a selection (see the following table), then press the knob.
- 3 Press and hold  $Q/ \Rightarrow$  to exit.

To return to the previous setting item or hierarchy, press  $\mathbf{Q}/\mathbf{\Delta}$ .

CALL	
<b>HISTOR</b>	v
IIIJION	•

CALL

- **1** Press the volume knob to select a name or a phone number.
  - "I" indicates call received, "O" indicates call made, "M" indicates call missed.
  - Press **DISP SCRL** to change the display category (NUMBER or NAME).
  - "NO DATA" appears if there is no recorded call history.
- **2** Press the volume knob to call.

### PHONE BOOK

- **1** Turn the volume knob to select a name, then press the knob.
- **2** Turn the volume knob to select a phone number, then press the knob to call.
- If the phone supports PBAP, the phonebook of the connected phone is automatically transferred to the unit when pairing. If the phone does not support PBAP, "TRANSFER PB" appears. Transfer the phonebook manually.
   (→ 14, TRANSFER PB)
- Contacts are categorized as: MO (mobile), HM (home), OF (office), OT (others), GE (general)
- This unit can display only non-accent letters. (Accent letters such as "Ú" is showns as "U".)
- If the phonebook contains many contacts, (→ Select a contact by name).

# NUMBER DIAL

- **1** Turn the volume knob to select a number (0 to 9) or character (\*, #, +).
- 2 Press I → I to move the entry position.
  Repeat steps 1 and 2 until you finish entering the phone number.
- 3 Press the volume knob to call. (or using RC-406)
- 1 Press the number buttons (0 to 9) to enter the phone number.
- 2 Press to call.

VOICE	Speak the name of the contact you want to call or use the voice command to control the phone functions. (→ 11)
BATT	LOW/ MID/ FULL: Shows the strength of the battery.
SIGNAL	NO SIGNAL/LOW/MID/MAX: Shows the strength of the current received signal.
SETTINGS	Default: <u>XX</u>
AUTO ANSWER	1 — <b>30</b> : The unit answer incoming call automatically in the selected time. ; <b>OFF</b> : Cancels.
RING MODE	<ul> <li>SYSTEM: The unit rings to notify you when a call/text message comes in (Default ring tone is different according to the paired device.)</li> <li>CALL: Selects your preferred ring tone (TONE 1 — 5) for incoming calls.</li> <li>MESSAGE: Selects your preferred ring tone (TONE 1 — 5) for incoming text messages.</li> <li>PHONE: The unit uses the connected phones' ring tone to notify you when a call/text message comes in. (The connected phone will ring if it does not support this feature.)</li> </ul>
SMS NOTIFY*	<u>ON</u> : The unit rings and "SMS RECEIVED" appears to notify you of an incoming text message.; <b>OFF</b> : Cancels.

<sup>\*</sup> Functionality depends on the type of the phone used.

# Select a contact by name

- You can search through the contacts quickly according to the first letter (A to Z), number (0 to 9), or symbol.
- The second alphabet of the contact will be searched if the first alphabet does not exist.
- 1 Press C to enter Bluetooth mode.
- 2 Turn the volume knob to select [PHONE BOOK], then press the knob.
- 3 Turn the volume knob quickly to enter alphabet search mode. The first menu (ABCDEFGHIJK) appears. To go to the other menu (LMNOPQRSTUV or WXYZ1∗), press ▲/▼.

- 4 Turn the volume knob or press | ◀ ✓ / ▶ ▶ | to select the desired first letter, then press the knob.
  - To search with numbers, select "1".
  - To search with symbols, select "\*".
- 5 Turn the volume knob to select a name, then press the knob.
- 6 Turn the volume knob to select a phone number, then press the knob to call.

To return to the previous hierarchy, press  $\mathbb{Q}/\mathbb{Z}$ .

# Store a contact in memory

You can store up to 6 contacts.

- 1 Press **?** to enter Bluetooth mode.
- 2 Turn the volume knob to select [CALL HISTORY], [PHONE BOOK], or [NUMBER DIAL], then press the knob.
- **3** Turn the volume knob to select a contact or enter a phone number. If a contact is selected, press the volume knob to show the phone number.
- **4** Press and hold one of the number buttons (1 to 6). "STORED" appears when the contact is stored.

To erase a contact from the preset memory, select [NUMBER DIAL] in step 2 and store a blank number.

# Make a call from memory

- 1 Press **?** to enter Bluetooth mode.
- 2 Press one of the number buttons (1 to 6).
- **3** Press the volume knob to call. "NO MEMORY" appears if there is no contacts stored.

### **Delete a contact**

Not applicable for mobile phone that supports PBAP.

- 1 Press **?** to enter Bluetooth mode.
- 2 Turn the volume knob to select [CALL HISTORY] or [PHONE BOOK], then press the knob.
- **3** Turn the volume knob to select a contact. If a contact is selected, press the volume knob to show the phone number.
- 4 Press and hold the volume knob to enter delete mode.
- 5 Turn the volume knob to select [DELETE ONE] or [DELETE ALL], then press the knob.
  DELETE ONE: Selected name or phone number in step 3 is deleted.
  - **DELETE ALL**: All names or phone numbers from the selected menu in step **2** is deleted.
- **6** Turn the volume knob to select [YES] or [NO], then press the knob.

# **Bluetooth mode settings**

- 1 Press the volume knob to enter [FUNCTION].
- 2 Turn the volume knob to select [BT MODE], then press the knob.
- 3 Turn the volume knob to make a selection (see the following table), then press the knob.
- 4 Press and hold Q/⇒ to exit.

To return to the previous setting item or hierarchy, press  $\mathbb{Q}/\mathbb{Z}$ .

Default: XX

PHONE SELECT	Selects the phone or audio device to connect or disconnect.
AUDIO SELECT	
DEVICE DELETE	<ul><li>1 Turn the volume knob to select a device to delete, then press the knob.</li><li>2 Turn the volume knob to select [YES] or [NO], then press the knob.</li></ul>
DVC PRIORITY	Selects a device to be connected as priority device. "*X" appears in front of the device name set as priority.

### **BLUETOOTH®**

TRANSFER PB*	"DL PB ***" appears and transfer the phonebook of the connected phone to this unit manually.  * Selectable only when the connected phone supports OPP.	
PIN CODE EDIT (0000)	<ul> <li>Changes the PIN code (up to 6 digits).</li> <li>1 Turn the volume knob to select a number.</li> <li>2 Press I → I to move the entry position.</li> <li>Repeat steps 1 and 2 until you finish entering the PIN code.</li> <li>3 Press the volume knob to confirm.</li> </ul>	
RECONNECT	<u><b>ON</b></u> : The unit automatically reconnect when the Bluetooth device is within range. ; <b>OFF</b> : Cancels.	
AUTO PAIRING	ON: The unit automatically pair supported Bluetooth device (iPhone/iPod touch) when it is connected through USB input terminal. Depending on the iOS version of the connected iPhone/iPod touch, this function may not work.; OFF: Cancels.	
BT HF/AUDIO	FRONT: Ouputs audio from the front left and right speakers.; ALL: Outputs audio from all the speakers.  YES: Updates all the Bluetooth settings (including stored pairing, phonebook, and etc.).; NO: Cancels.	
INITIALIZE		

# Internet radio via Bluetooth

(for KDC-BT318U)

### **Listen to Pandora**

# **Preparation:**

Select [ON] for [PANDORA SRC]. (→ 4)

You can listen to Pandora on your smart phone (Android OS) through Bluetooth on this unit.

- Open the Pandora application on your device.
- 2 Connect to Bluetooth audio player. (→ 10)
- 3 Press () SRC to select PANDORA.
  The source switches and broadcast starts automatically.
- You can operate Pandora in the same way as Pandora for iPod/iPhone. (→ 8)

### Listen to iHeartRadio

# **Preparation:**

Select [ON] for [IHEART SRC]. (→ 4)

You can listen to iHeartRadio on your smart phone (Android OS) through Bluetooth on this unit.

- 1 Open the iHeart Link application on your smart phone.
- 2 Connect your smart phone via Bluetooth connection. (→ 10)
- **3** Press  $\bigcirc$  **SRC** to select IHEARTRADIO. The source switches and broadcast starts automatically.
- You can operate iHeartRadio in the same way as iHeartRadio for iPod/iPhone. (→ 9)

# **Bluetooth audio player**

Operations and display indications may differ according to their availability on the connected device.

То	Do this	
Playback	<ul> <li>1 Press  SRC (or press SRC on RC-406) to select BT AUDIO.</li> <li>2 Operate the Bluetooth audio player to start playback.</li> </ul>	
Pause or resume playback	Press 6 ► II (or press ENT ► II on RC-406)	
Select group or folder	Press ▲ / ▼ (or press *AM- / #FM+ on RC-406).	
Reverse/forward skip	Press   ◀ ◀ / ▶ ▶   (or press   ◀ ◀ / ▶ ▶   (+) on RC-406)	
Reverse/fast- forward	Press and hold  ◄◄ / ▶►  (or press and hold  ◄◄ / ▶►  (+) on RC-406).	
Repeat play	Press 4   repeatedly to make a selection.  ALL REPEAT, FILE REPEAT, REPEAT OFF	
Random play	Press 3   repeatedly to make a selection.  FOLDER RANDOM, RANDOM OFF Press and hold 3   to select "ALL RANDOM."	

# **AUDIO SETTINGS**

While listening to any source...

- 1 Press the volume knob to enter [FUNCTION].
- 2 Turn the volume knob to select [AUDIO CONTROL], then press the knob.
- 3 Turn the volume knob to make a selection (see the following table), then press the knob.
  - Repeat step **3** until the desired item is selected or activated.
- 4 Press and hold  $Q/\Rightarrow$  to exit.

(or using RC-406) -

- 1 Press AUD to enter [AUDIO CONTROL].
- 2 Press  $\triangle/\nabla$  to make a selection, then press **ENT**  $\triangleright$  | | | |.

To return to the previous setting item or hierarchy, press  $Q/\Delta$ .

Default: XX

SUB-W LEVEL	-15 to +15 ( <u>0</u> ):	Adjusts the subwoofer output level.	
BASS LEVEL	$-8 \text{ to } +8 (\underline{+6})$ :	Adjusts the level to memorize for each source.	
MID LEVEL	$-8 \text{ to } +8 (\underline{+5})$ :	(Before making an adjustment, select the source you	
TRE LEVEL	$-8 \text{ to } +8 (\underline{0})$ :	want to adjust.)	
PRESET EQ	<u>DRIVE EQ</u> /TOP40/ POWERFUL/ ROCK/ POPS/ EASY/ JAZZ/ NATURAL/ USER: Selects a preset equalizer suitable to the music genre. (Select [USER] to use the customized bass, middle, and treble settings.) [DRIVE EQ] is a preset equalizer that reduces noise from the road.		
BASS BOOST	LV1/ LV2/ LV3: Selects your preferred bass boost level.; OFF: Cancels.		
LOUDNESS	<u>LV1</u> / <b>LV2</b> : Selects your preferred low and high frequencies boost to produce a well-balanced sound at a low volume level.; <b>OFF</b> : Cancels.		
SUBWOOFER SET	<u>ON</u> : Turns on the subwoofer output. ; <b>OFF</b> : Cancels.		
LPF SUBWOOFER	THROUGH: All signals are sent to the subwoofer.; 85HZ/120HZ/160HZ: Audio signals with frequencies lower than 85 Hz/120 Hz/160 Hz are sent to the subwoofer.		

SUB-W PHASE	<b>REVERSE</b> (180°)/ <u>NORMAL</u> (0°): Selects the phase of the subwoofer output to be in line with the speaker output for optimum performance. (Selectable only if a setting other than [THROUGH] is selected for [LPF SUBWOOFER].)
<b>FADER</b> R15 to F15 ( <u>0</u> ): Adjusts the rear and front speaker output balance.	
BALANCE L15 to R15 ( <u>0</u> ): Adjusts the left and right speaker output balance	
VOLUME OFFSET —8 to +8 (for AUX); —8 to 0 (for other sources): Presets the value adjustment level of each source. (Before adjustment, select the you want to adjust.)	
SOUND RECNSTR (Sound reconstruction)	<b>ON</b> : Creates realistic sound by compensating the high-frequency components and restoring the rise-time of the waveform that are lost in audio data compression.; <b>OFF</b> : Cancels.

- [SUB-W LEVEL]/ [SUBWOOFER SET]/ [LPF SUBWOOFER]/ [SUB-W PHASE] is selectable only if [SWITCH PREOUT] is set to [SUB-W]. (→ 4)
- [SUB-W LEVEL]/ [LPF SUBWOOFER]/ [SUB-W PHASE] is selectable only if [SUBWOOFER SET] is set to [ON].

# **DISPLAY SETTINGS**

- 1 Press the volume knob to enter [FUNCTION].
- 2 Turn the volume knob to select [DISPLAY], then press the knob.
- 3 Turn the volume knob to make a selection (see the following table), then press the knob. Repeat step 3 until the desired item is selected or activated.
- 4 Press and hold Q / ⇒ to exit.

To return to the previous setting item or hierarchy, press  $Q/\Delta$ .

Default: XX

### COLOR VARIABLE SCAN/ COLOR 01 — COLOR 24/ **SELECT\* USER**: Selects your preferred button illumination color. You can create your own color (when [COLOR 01] — [COLOR 24] or [USER] is selected). The color you have created can be selected when you select [USER]. 1 Press and hold the volume knob to enter the detailed color adjustment. 2 Press I ✓ ✓ / ► ► I to select the color (R/G/ **B**) to adjust. **3** Turn the volume knob to adjust the level (0 — 9), then press the knob. **DIMMER ON**: Dims the display illumination (and button illumination\*).; OFF: Illuminates according to the [BRIGHTNESS] settings. **BRIGHTNESS** LVL 0 — LVL 31: Selects your preferred brightness level for display illumination (and button illumination\*). AUTO/ ONCE: Selects whether to scroll the TEXT SCROLL display information automatically, or scroll only once.; OFF: Cancels.

# MORE INFORMATION

### General

• This unit can only play the following CDs:







 Detailed information and notes about the playable audio files are stated in an online manual on the following web site: www.kenwood.com/cs/ce/audiofile/

# **Playable files**

- Playable audio file: MP3 (.mp3), WMA (.wma)
- Playable disc media: CD-R/CD-RW/CD-ROM
- Playable disc file format: ISO 9660 Level 1/2, Joliet, Long file name.
- Playable USB device file system: FAT12, FAT16, FAT32

Even when audio files comply with the standards listed above, playback may be impossible depending on the types or conditions of media or device.

# **Unplayable discs**

- Discs that are not round.
- Discs with coloring on the recording surface or discs that are dirty.
- Recordable/ReWritable discs that have not been finalized.
- 8 cm CD. Attempting to insert using an adapter may cause malfunction.

# **About USB devices**

- This unit can play MP3/WMA/WAV files stored on a USB mass storage class device.
- You cannot connect a USB device via a USB hub.
- Connecting a cable whose total length is longer than 5 m may result in abnormal playback.
- This unit cannot recognize a USB device whose rating is other than 5 V and exceeds 1 A.

# **About KENWOOD Music Editor Light and KENWOOD Music Control**

- This unit supports the PC application KENWOOD Music Editor Light and Android™ application KENWOOD Music Control.
- When you play audio files with song data added using the KENWOOD Music Editor Light or KENWOOD Music Control, you can search for audio files by Genres, Artists, Albums, Playlists, and Songs.
- KENWOOD Music Editor Light and KENWOOD Music Control are available on the following web site: www.kenwood.com/cs/ce/

# About iPod/iPhone

Made for

- iPod touch (1st, 2nd, 3rd, 4th, and 5th generation)
- iPod classic
- iPod nano (3rd, 4th, 5th, 6th, and 7th generation)
- iPhone, iPhone 3G, 3GS, 4, 4S, 5
- For the latest compatible list and software versions of iPhone/iPod, see: www.kenwood.com/cs/ce/ipod
- You cannot operate iPod if "KENWOOD" or "✓" is displayed on iPod.

# **About Pandora**

- Pandora is available only in the U.S., Australia and New Zealand.
- Because Pandora is a third-party service, the specifications are subject to change without prior notice. Accordingly, compatibility may be impaired, or some or all of the services may become unavailable.
- Some functions of Pandora cannot be operated from this unit.
- For issues using the application, please contact Pandora at pandora-support@pandora.com.

### **About iHeartRadio**

- iHeartRadio® is a third-party service, therefore the specifications are subject to change without prior notice. Accordingly, compatibility may be impaired or some or all of the services may become unavailable.
- Some iHeartRadio® functionality cannot be operated from this unit.

# **About Bluetooth**

- Depending on the Bluetooth version of the device, some Bluetooth devices may not be able to connect to this unit.
- This unit may not work with some Bluetooth devices.
- Signal conditions vary, depending on the surroundings.
- For more information about Bluetooth, visit the following website: www.kenwood.com/cs/ce/

<sup>\*</sup> For KDC-BT358U

# **TROUBLESHOOTING**

Symptom	Remedy
Sound cannot be heard.	<ul> <li>Adjust the volume to the optimum level.</li> <li>Check the cords and connections.</li> </ul>
"PROTECT" appears and no operations can be done.	Check to be sure the terminals of the speaker wires are insulated properly, then reset the unit. If this does not solve the problem, consult your nearest service center.
Sound cannot be heard. The unit does not turn on. Information shown on the display is incorrect.	Clean the connectors. (→ 2)
The unit does not work at all.	Reset the unit. (→ 3)
Radio reception is poor. Static noise while listening to the radio.	<ul><li>Connect the antenna firmly.</li><li>Pull the antenna out all the way.</li></ul>
"NA FILE" appears.	Make sure the disc contains supported audio files. ( $\Rightarrow$ 16)
"NO DISC" appears.	Insert a playable disc into the loading slot.
"TOC ERROR" appears.	Make sure the disc is clean and inserted properly.
"PLEASE EJECT" appears.	Reset the unit. If this does not solve the problem, consult your nearest service center.
Disc cannot be ejected.	Press and hold ▲ to forcibly eject the disc. Be careful not to drop the disc when it is ejected. If this does not solve the problem, reset the unit. (→ 3)
"READ ERROR" appears.	Copy the files and folders onto the USB device again. If this does not solve the problem, reset the USB device or use another USB device.
"NO DEVICE" appears.	Connect a USB device, and change the source to USB again.
"COPY PRO" appears.	A copy-protected file is played.
"NA DEVICE" appears.	Connect a supported USB device, and check the connections.
"NO MUSIC" appears.	Connect a USB device that contains playable audio files.

Symptom		Remedy	
"iPod ERROR" appears.		Reconnect the iPod. Reset the iPod.	
Noise	is generated.	Skip to another track or change the disc.	
	s do not play back as you ded them to play.	Playback order is determined when files are recorded.	
"READ	DING" keeps flashing.	Do not use too many hierarchical levels or folders.	
Elapse correc	ed playing time is not t.	This is caused by how the tracks are recorded.	
	t characters are not yed (e.g. album name).	This unit can only display uppercase letters, numbers, and a limited number of symbols.	
	"ADD ERROR" "SEARCH ERROR"	New station creation is unsuccessful.	
	"CHECK DEVICE"	Check the Pandora application on your device.	
	"NO SKIPS"	The skip limit has been reached.	
	"NO STATIONS"	No stations are found.	
andora	"STATION LIMIT"	The number of registered stations has reached its limit. Retry after deleting unnecessary stations from your device.	
Pa	"UPGRADE APP"	Make sure you have installed the latest version of the Pandora application on your device.	
	"CONNECT ERROR"	Communication is unstable.	
	"RATING ERROR"	Registration of thumbs up/thumbs down has failed.	
	"LICENSE ERROR"	You try to access from a country which Pandora is not deliverable.	
HeartRadio	Station cannot be selected.	If "Explicit Content" in [Account Settings] is checked in the web version of iHeartRADIO, custom stations become unavailable.	
іНеаі	"CANNOT CREATE"	Custom station name creation is unsuccessful.	
	"CANNOT SAVE"	Addition to the favorite category failed.	

# **TROUBLESHOOTING**

Symptom		Remedy	
	"DISCONNECTED"	Check the connection to the device.	
	"NO SKIPS"	The skip limit has been reached. Retry later.	
	"NO STATIONS"	No stations are found.	
	"NOT CONNECTED"	Link to the application is impossible.	
.0	"IHEARTLINK UP"	Make sure you have installed the latest version of the iHeart Link for KENWOOD application on your device.	
tRad	"PLEASE LOGIN"	You haven't log in. Log in again.	
iHeartRadio	"STATION NOT AVAILABLE"	Broadcast from the station is over.	
	"STATION NOT SELECTED"	No station is selected.	
	"STREAM ERROR"	Broadcast data is interrupted.	
	"THUMB FAILED"	Registration of Thumbs Up/Down has failed.	
	"TIMED OUT"	The request has resulted in time-out.	
	No Bluetooth device is detected.	<ul> <li>Search from the Bluetooth device again.</li> <li>Reset the unit. (→ 3)</li> </ul>	
	Pairing cannot be made.	<ul> <li>Make sure you have entered the same PIN code to both the unit and Bluetooth device.</li> <li>Delete pairing information from both the unit and the Bluetooth device, then perform pairing again. (→ 10)</li> </ul>	
Bluetooth®	"DEVICE FULL" appears.	The number of registered devices has reached its limit. Retry after deleting an unnecessary device. (→ 13, DEVICE DELETE)	
	Echo or noise occurs.	<ul> <li>Adjust the microphone unit's position. (→ 10)</li> <li>Check the [ECHO CANCEL] setting. (→ 11)</li> </ul>	
	Phone sound quality is poor.	<ul> <li>Reduce the distance between the unit and the Bluetooth device.</li> <li>Move the car to a place where you can get a better signal reception.</li> </ul>	

Symptom		Remedy
	<ul><li>Voice calling method is not successful.</li><li>"N/A VOICE TAG" appears.</li></ul>	<ul> <li>Use voice calling method in a more quiet environment.</li> <li>Reduce the distance from the microphone when you speak the name.</li> <li>Make sure the same voice as the registered voice tag is used.</li> </ul>
	"NOT SUPPORT" appears.	The connected phone does not support Voice Recognition feature.
	<ul><li> "NO ENTRY" appears.</li><li> "NO PAIR" appears.</li></ul>	There is no registered device connected/found via Bluetooth.
th <sup>®</sup>	"ERROR" appears.	Try the operation again. If "ERROR" appears again, check if the device supports the function you have tried.
Bluetooth®	"NO INFO" appears.	Bluetooth device cannot get the contact information.
Blu	Sound is being interrupted or skipped during playback of a Bluetooth audio player.	<ul> <li>Reduce the distance between the unit and the Bluetooth audio player.</li> <li>Turn off, then turn on the unit and try to connect again.</li> <li>Other Bluetooth devices might be trying to connect to the unit.</li> </ul>
	The connected Bluetooth audio player cannot be controlled.	<ul> <li>Check whether the connected Bluetooth audio player supports Audio/Video Remote Control Profile (AVRCP). (Refer to the instructions of your audio player.)</li> <li>Disconnect and connect the Bluetooth player again.</li> </ul>
	<ul><li> "HF ERROR XX" appears.</li><li> "BT ERROR" appears.</li></ul>	Reset the unit and try the operation again. If this does not solve the problem, consult your nearest service center.

# **SPECIFICATIONS**

	FM Frequency Range	KDC-BT358U: 87.5 MHz — 108 MHz (50 kHz space) KDC-BT318U: 87.9 MHz — 107.9 MHz (200 kHz space)
	Usable Sensitivity ( $S/N = 26 \text{ dB}$ )	8.2 dBf (0.71 $\mu$ V/75 $\Omega$ )
TUNER	Quieting Sensitivity (DIN S/N = 46 dB)	17.2 dBf (2.0 μV/75 Ω)
-	Frequency Response (±3 dB)	30 Hz — 15 kHz
	Signal-to-Noise Ratio (MONO)	64 dB
	Stereo Separation (1 kHz)	40 dB
	AM Frequency Range	530 kHz — 1 700 kHz (10 kHz space)
	Usable Sensitivity (S/N = 20 dB)	29 dBμ (28.2 μV)
	Laser Diode	GaAlAs
	Digital Filter (D/A)	8 times over sampling
	Spindle Speed	500 rpm — 200 rpm (CLV)
	Wow & Flutter	Below measurable limit
yer	Frequency Response (±1 dB)	20 Hz — 20 kHz
CD player	Total Harmonic Distortion (1 kHz)	0.01 %
0	Signal-to-Noise Ratio (1 kHz)	105 dB
	Dynamic Range	90 dB
	Channel Seperation	85 dB
	MP3 Decode	Compliant with MPEG-1/2 Audio Layer-3
	WMA Decode	Compliant with Windows Media Audio
	USB Standard	USB 1.1, USB 2.0 (Full speed)
	File System	FAT12/ 16/ 32
JSB	Maximum Supply Current	DC 5 V ==== 1 A
Ď	MP3 Decode	Compliant with MPEG-1/2 Audio Layer-3
	WMA Decode	Compliant with Windows Media Audio
	WAV Decode	Linear-PCM

	Version	Bluetooth Ver.2.1-	+EDR Certified
	Frequency Range	2.402 GHz — 2.480 GHz	
	Output Power	+4 dBm (MAX), 0	dBm (AVE) Power Class 2
oth	Maximum Communication Range	Line of sight appro	x. 10 m (32.8 ft)
Sluetooth	Profile	HFP (Hands-Free P	rofile)
Blu		SPP (Serial Port Pro	•
		PBAP (Phonebook	•
		OPP (Object Push F	udio Distribution Profile)
		•	eo Remote Control Profile)
	Marinarina Ordanid Darray	50.W A	
	Maximum Output Power	50 W × 4	L 1 0/ TUD)
	Full Bandwidth Power	22 W × 4 (at less than 1 % THD)	
0	Speaker Impedance	4 Ω — 8 Ω	
Audio	Tone Action	Bass	200 Hz ±8 dB
Ą	_	Middle	2.5 kHz ±8 dB
		Treble	12.5 kHz ±8 dB
	Preout Level/Load (CD)	2 500 mV/10 kΩ	
	Preout Impedance	≤ 600 Ω	
<u></u>	Frequency Response (±3 dB)	20 Hz — 20 kHz	
Auxiliary	Input Maximum Voltage	1 200 mV	
Au	Input Impedance	30 kΩ	
	Operating Voltage	14.4 V (10.5 V —	16 V allowable)
_	Maximum Current Consumption	10 A	
General	Operational Temperature Range	0°C — +40°C	
Ger	Installation Size (W $\times$ H $\times$ D)	182 mm × 53 mm	
		(7-3/16" × 2-1/8"	× 6-1/4")
	Weight	1.3 kg (2.87 lbs)	

Subject to change without notice.

### **A** Warning


- The unit can only be used with a 12 V DC power supply, negative ground.
- Disconnect the battery's negative terminal before wiring and mounting.
- Do not connect Battery wire (yellow) and Ignition wire (red) to the car chassis or Ground wire (black) to prevent a short circuit.
- Insulate unconnected wires with vinyl tape to prevent a short circuit.
- Be sure to ground this unit to the car's chassis again after installation.

### **A** Caution

- For safety's sake, leave wiring and mounting to professionals.
   Consult the car audio dealer.
- Install this unit in the console of your vehicle. Do not touch the metal parts of this unit during and shortly after use of the unit. Metal parts such as the heat sink and enclosure become hot.
- Do not connect the wires of speakers to the car chassis or Ground wire (black), or connect them in parallel.
- Mount the unit at an angle of less than 30°.
- If your vehicle wiring harness does not have the ignition terminal, connect Ignition wire (red) to the terminal on the vehicle's fuse box which provides 12 V DC power supply and is turned on and off by the ignition key.
- After the unit is installed, check whether the brake lamps, blinkers, wipers, etc. on the car are working properly.
- If the fuse blows, first make sure the wires are not touching car's chassis, then replace the old fuse with one that has the same rating.


# **Basic procedure**


- 1 Remove the key from the ignition switch, then disconnect the terminal of the car battery.
- 2 Connect the wires properly. See Wiring connection. (→ 21)
- 3 Install the unit to your car. See Installing the unit (in-dash mounting).
- **4** Connect the  $\bigcirc$  terminal of the car battery.
- **5** Reset the unit. (→ 3)

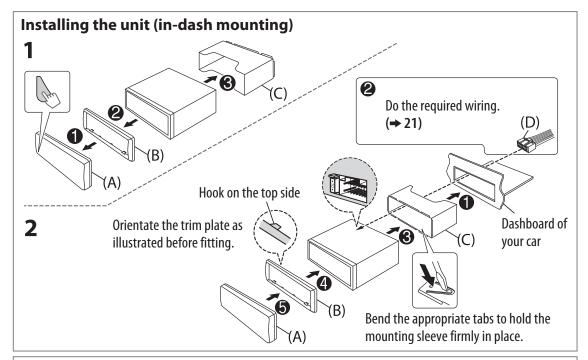

# When installing without the mounting sleeve


- 1 Remove the mounting sleeve and trim plate from the unit.
- 2 Align the holes in the unit (on both sides) with the vehicle mounting bracket and secure the unit with screws (commercially available).







# How to remove the unit

- 1 Detach the faceplate.
- 2 Fit the catch pin on the extraction keys into the holes on both sides of the trim plate, then pull it out.
- 3 Insert the extraction keys deeply into the slots on each side, then follow the arrows as shown on the right.



# **Wiring connection**

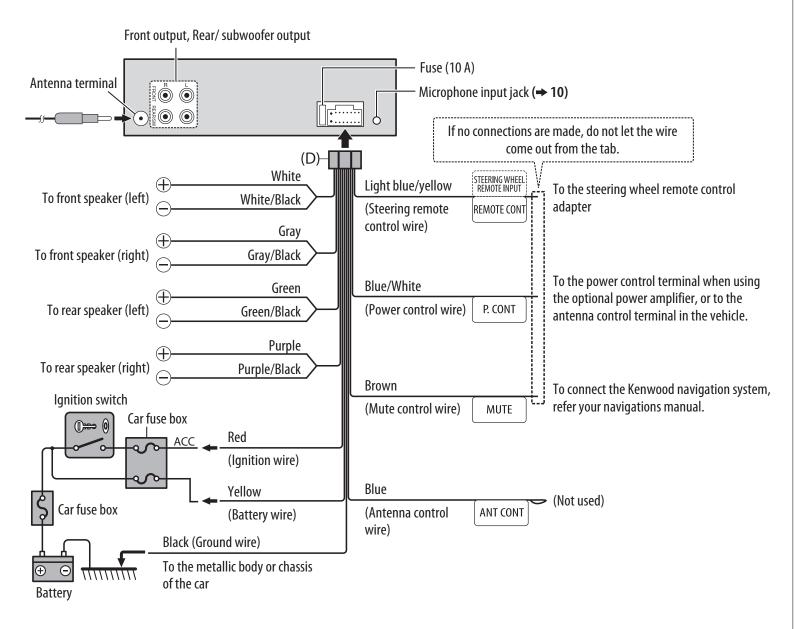

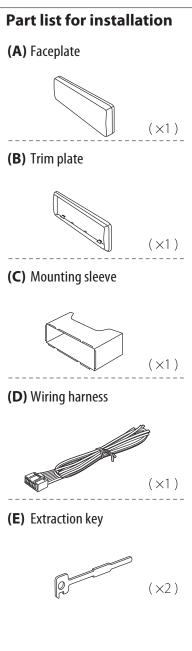

### IC (Industry Canada) Notice

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

The term "IC: " before the certification/ registration number only signifies that the Industry Canada technical specification were met.

### Note de IC (Industrie Canada)

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

L'expression "IC:" avant le numéro d'homologation/ enregistrement signifie seulement que les specifications techniques d'Industrie Canada ont été respectées.

### Para cumplimiento de la COFETEL:

"La operación de este equipo está sujeta a las siguientes dos condiciones:

- (1) es posible que este equipo o dispositivo no cause interferencia perjudicial y
- (2) este equipo o dispositivo debe aceptar cualquier interferencia, incluyendo la que pueda causar su operación no deseada"

### **CAUTION**

This equipment complies with FCC/IC radiation exposure limits set forth for an uncontrolled environment and meets the FCC radio frequency (RF) Exposure Guidelines in Supplement C to OET65 and RSS-102 of the IC radio frequency (RF) Exposure rules. This equipment has very low levels of RF energy that it deemed to comply without maximum permissive exposure evaluation (MPE). But it is desirable that it should be installed and operated keeping the radiator at least 20cm or more away from person's body (excluding extremities: hands, wrists, feet and ankles). Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

### **ATTENTION**

Cet équipement est conforme aux limites d'exposition aux rayonnements énoncées pour un environnement non contrôlé et respecte les règles d'exposition aux fréquences radioélectriques (RF) CNR-102 de l'IC. Cet équipement émet une énergie RF très faible qui est considérée conforme sans évaluation de l'exposition maximale autorisée. Cependant, cet équipement doit être installé et utilisé en gardant une distance de 20 cm ou plus entre le dispositif rayonnant et le corps (à l'exception des extrémités : mains, poignets, pieds et chevilles). Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

- Contains Bluetooth Module FCC ID: XON-BTR60X
- Contains Bluetooth Module IC: 9688A-BTR601

### **CAUTION**

Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

In compliance with Federal Regulations, following are reproductions of labels on, or inside the product relating to laser product safety.

JVC KENWOOD Corporation 2967-3, ISHIKAWA-MACHI, HACHIOJI-SHI, TOKYO, JAPAN

THIS PRODUCT COMPLIES WITH DHHS RULES 21CFR SUBCHAPTER J IN EFFECT AT DATE OF MANUFACTURE.

Location: Top Plate

### **FCC WARNING**

This equipment may generate or use radio frequency energy. Changes or modifications to this equipment may cause harmful interference unless the modifications are expressly approved in the instruction manual. The user could lose the authority to operate this equipment if an unauthorized change or modification is made.

### **FCC NOTE**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment may cause harmful interference to radio communications, if it is not installed and used in accordance with the instructions. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Información acerca de la eliminación de equipos eléctricos y electrónicos al final de la vida útil (aplicable a los países que hayan adoptado sistemas independientes de recogida de residuos)



Los productos con el símbolo de un contenedor con ruedas tachado no podrán ser desechados como residuos domésticos. Los equipos eléctricos y electrónicos al final de la vida útil, deberán ser reciclados en instalaciones que puedan dar el tratamiento adecuado a estos productos y a sus subproductos residuales correspondientes. Póngase en contacto con su administración local para obtener información sobre el punto de recogida más cercano. Un tratamiento correcto del reciclaje y la eliminación de residuos ayuda a conservar los recursos y evita al mismo tiempo efectos perjudiciales en la salud y el medio ambiente.

### **CALIFORNIA, USA ONLY**

This product contains a CR Coin Cell Lithium Battery which contains Perchlorate Material—special handling may apply. See www.dtsc.ca.gov/hazardouswaste/perchlorate

### Informação sobre a eliminação de pilhas

Este produto não deve ser eliminado como lixo doméstico geral. Devolva a pilha usada ao revendedor ou entidade autorizada para que a mesma seja devolvida ao fabricante ou importador.

A reciclagem e a eliminação de lixo de maneira apropriada ajudarão a conservar os recursos naturais ao mesmo tempo que prevenirão os efeitos prejudicais à nossa saúde e ao meio ambiente.











- "Made for iPod," and "Made for iPhone" mean that an electronic accessory has been designed to connect specifically to iPod, or iPhone, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPod or iPhone may affect wireless performance.
- iPhone, iPod, iPod classic, iPod nano, and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries.
- Lightning is a trademark of Apple Inc.
- Pandora, the Pandora logo, and the Pandora trade dress are trademarks or registered trademarks of Pandora Media, Inc., used with permission.
- iHeartRadio® is a registered mark of Clear Channel Broadcasting, Inc. in the United States and other countries. Such marks are used under license.
- Android is trademark of Google Inc.
- The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by JVC KENWOOD Corporation is under license. Other trademarks and trade names are those of their respective owners.

### **MILITARY**

Units purchased through the U.S.A. military exchange service overseas may be serviced under warranty in the continental U.S.A., subject to the following conditions.

- 1) The original warranty is in effect.
- 2) Proof of purchase is provided to the servicer.

### WARRANTY FOR MILITARY MARKET

Kenwood corporation is proud of the quality and workmanship of its audio equipment. This unit has been properly designed. tested and inspected before it was shipped to you. If properly installed and operated in accordance with instructions furnished. it should give you an optimum reliable performance.

### WARRANTY PERIOD

This product is warranted for a period of (1) year from the date of the original purchase.

### SCOPE OF WARRANTY

Except as specified below, this warranty covers all defects in materials and workmanship of the Kenwood brand products.

During the warranty period, any authorized Kenwood Service Center in the military market listed in the back of this warranty card will provide you free-of-charge both parts and labor required to correct any defect in materials or workmanship.

The following are not covered by this warranty.

- 1. Voltage conversions.
- Periodic check-ups which do not disclose any defect covered by the warranty.
- Cabinets, grilles, other exterior finishes, belts, tape heads, and other non-durable parts and accessories.
- Units on which the serial number has been effaced, modified or removed.
- 5. Installation and/or removal charges
- 6. Damaged magnetic tapes
- 7. House call charges for any repairs.
- Shipping or delivery charges to or from an authorized Kenwood Service Center.
- This warranty will not cover any failure that is due to any of the following conditions in accordance with the visual inspection of the authorized Kenwood Service Center;
- \* Improper maintenance or repair, including the installation of parts or accessories that do not conform to the quality and specifications of the original parts.
- \* Misuse, abuse, neglect, unauthorized product modification or failure to follow instructions contained in the Owners Manual
- \* Accidental or intentional damages.
- \* Repairs or attempted repairs by an unauthorized agency.

  (All repairs must be performed at an authorized Kenwood Service Center.)
- \* Damages or deteriorations caused during shipment (Claims must be presented to the carrier).
- \*Damages or deteriorations resulting from removal and/ or replacement.

# PURCHASER'S RESPONSIBILITIES As the purchased of a new Kenwood brand product, you are

requested to do the following in order to obtain Kenwood warranty service.

- Retain your sales slip or other evidence of purchase for proving your eligibility for requesting Kenwood warranty service.
- Make your unit available to an authorized Kenwood Service Center in the military market for inspection and approved warranty service, or ship your unit in its original carton box or equivalent, fully insured and shipping charges prepaid, to the authorized Kenwood Service Center

# LIMITATION OF IMPLIED WARRANTIES

Any and all implied warranties, including warranties of merchantability and fitness for a particular purpose, shall be limited in duration to the length of this warranty.

### **EXCLUSION OF CERTAIN DAMAGES**

KENWOODs liability for any defective product is limited to the repair or replacement of said product, at our potion, and shall not include damages of any kind, whether incidental, consequential or otherwise, expect to the extent prohibited by applicable law.

### KENWOOD AUTHORIZED SERVICE CENTERS IN MILITARY MARKET

### JAPAN:

### Yokota

Kenwood Rep.; c/o Yokota BX, JAAX AAFES-PAC, APO San Francisco 96328

### 7ama

Kenwood Rep.; c/o Zama PX, JAAX AAFES-PAC, APO San Francisco 96343

### Misawa

Kenwood Rep,; c/o Misawa BX, JAAX AAFES-PAC, APO San Francisco 96519

### Yokosuka

Kenwood Rep,; c/o A-33, Yokosuka NEX No. 260-010 FPO Seattle 98760

### Atsuai

Kenwood Rep.; c/o Atsugi NEX No. 260-020 FPO Seattle 98767

### lwakuni

Kenwood Rep.; c/o Marine Corps Exchange, Marine Corps Air Station, FPO Seattle 98764

### Sasebo

Sasebo NEX; Navy Exchange 260-040 F.A. Box 115 FPO Seattle 98766

### Okinawa

Kenwood Rep.; c/o OWAX, AAFES-PAC, APO San Francisco 96230

### KOREA:

Kenwood Rep.; c/o KOAX Repair Shop, AAFES-PAC DD-Camp Market, APO San Francisco 96488

### GUAM:

Kenwood Rep,; c/o Guam NEX No. 230-010, FPO San Francisco 96630 Kenwood Rep,; c/o GUAX, AAFES-PAC, APO San Francisco 96334

### U.S.A.:

### Hawaii

Kenwood Factory Service 99-994 Iwaena St., Aiea, Hawaii 96701

### Alaska

Vista Radio TV,; 861 East Loop Road, Anchorage, Alaska 99501 Anchorage Commercial Electronics, Inc.; 1450 East 9th Ave., Anchorage, Alaska

### In The Continental U.S.A.

For Nearest Authorized Service Center; Tel: 1-800-536-9663

### Kenwood Service U.S.A.


Kenwood Factory Service; P.O. Box 22745, 2201 East Dominguez Street, Long Beach, California 90801-5745 Tel: (310) 639-5300

Please inquire at the military resale

### EUROPE:

outlets where you bought your Kenwood products, or KENWOOD ELECTRONICS DEUTSCHLAND GMBH: Rembrücker-Str. 15, 63150 Heusenstamm, Germany Tel.: 49-06104-69010

# **Warranty Card**

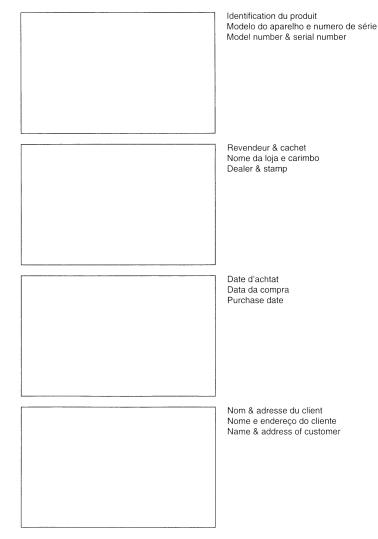

### Attention:

This card and receipt (or invoice) are necessary to purchase a new panel in case of theft or damage.

### Attention:

Vous aurez besoin de cette carte et du reçu (ou de la facture) pour acheter un nouveau panneau en cas de vol ou d'endommagement.

### Atencão:

Em caso de dano ou perda do painel frontal, este Certificado de Garantia e a Nota Fiscal de compra serão requisitados para a aquisição de um novo painel.

© B46-0824-00/01 (K) (12/07)

### Dear Customer,

Thank you for purchasing this kenwood product. As mentioned in the pages of this booklet, our warranty is only valid in the countries listed. If your country is not listed please contact your retailer for information on warranty procedure, or write to:

### **JVC KENWOOD Customer Information Center**

3-12, Moriyacho, Kanagawa-ku, Yokohama-shi, Kanagawa 221-0022, Japan

### U.S.A.

This warranty will be honored only in the U.S.A.

### KENWOOD LIMITED WARRANTY FOR CAR STEREO COMPONENTS

### HOW LONG IS THE WARRANTY

Kenwood U.S.A. Corporation ("Kenwood") warrants this product for a period of one (1) year from the date of original

### WHAT IS COVERED AND WHAT IS NOT COVERED

Except as specified below, this warranty covers all defects in material and workmanship in Kenwood car stereo components. The following are not covered by the warranty:

- I. Any product which is not distributed in the U.S.A. by Kenwood or which is not purchased in the U.S.A. from an authorized Kenwood car stereo dealer or an automobile dealer, unless the product is purchased through the U.S.A. Military Exchange Service
- 2. Any product on which the serial number has been detaced. modified or removed.
- . Damage, deterioration or malfunction resulting from:
- a. Any shipment of the product (claims must be presented to the carrier)
- b. Installation or removal of the product.
- c. Accident, acts of nature, misuse, abuse, neglect, unauthorized product modification or failure to follow instructions supplied with the product
- d. Repair or attempted repair by anyone not authorized
- e. Any other cause which does not relate to a product defect.

### KENWOOD USA CORPORATION

WHO IS PROTECTED This warranty is enforceable only by the original purchaser.

### WHAT WE WILL PAY FOR

We will pay for all labor and material expenses for covered items. Payment of shipping charges is discussed in the next section of this warranty.

### HOW TO OBTAIN WARRANTY SERVICE

If your KENWOOD product ever needs service:

- 1. Take or ship it to any KENWOOD Authorized Service Center in the U.S.A. along with & complete description of the problem. (if you are uncertain as to whether a Service Center is authorized, please call 1-800-KENWOOD for the nearest Service Center. 1-800-536-9663).
- 2. Although you must pay any shipping charges if it is necessary to ship the product for warranty service, we will pay the return shipping charges if the repairs are covered by the warranty within the United States.
- 3. Whenever your units are taken or sent for warranty service. you must include a copy of the original dated sales receipt as proof of warranty coverage

### LIMITATION OF IMPLIED WARRANTIES

ALL IMPLIED WARRANTIES. INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED IN DURATION TO THE LENGTH OF

### **EXCLUSION OF DAMAGES**

KENWOOD'S LIABILITY FOR ANY DEFECTIVE PRODUCT IS LIMITED TO THE REPAIR OR REPLACEMENT OF THE PRODUCT AT OUR OPTION, KENWOOD SHALL NOT BE LIABLE FOR:

- 1. INSTALLATION OR REMOVAL CHARGES. DAMAGE TO OTHER PROPERTY CAUSED BY ANY DEFECTS IN KENWOOD CAR STEREO COMPONENTS, DAMAGES BASED UPON INCONVENIENCE, LOSS OF USE OF THE PRODUCT: OR
- 2 ANY OTHER DAMAGES. WHETHER INCIDENTAL CONSEQUENTIAL OR OTHERWISE.

SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS AND/OR DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES. SO THE ABOVE LIMITATIONS AND EXCLUSIONS MAY NOT APPLY TO YOU.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

If a problem develops during or after the Limited Warranty Period. or if you have any questions regarding the operation of the product, you should contact your KENWOOD Authorized Dealer or Authorized Service Center. If the problem or your question is not handled to your satisfaction, please contact our Customer Relations Department at the address listed below:

KENWOOD USA CORPORATION P.O Box 22745, 2201 East Dominguez Street, Long Beach, CA 90801-5745 Tel: (310) 639-5300

### **CANADA**

### KENWOOD WARRANTY

KENWOOD ELECTRONICS CANADA INC. (hereinafter called "KENWOOD"), gives the following written warranty to the nuginal customer of each new Kenwood, product distributed in Canada by KENWOOD and purchased from a dealer authorized

KENWOOD warrants that each new Kenwood product, under normal use, is free from any defects, subject to the terms and conditions set forth below. If a defect should occur within the warranty period, repairs will be made free of charge for parts and labour when such defects are determined by KENWOOD or its' authorized service centres to be attributable to faulty materials or workmanship at time of manufacture. Please contact KENWOOD to confirm if a dealer or service centre is authorized by KENWOOD

### WARRANTY PERIOD

This Kenwood product is warranted for parts and labour for a period of one (1) year from the date of original purchase, lease. or rental, except for products which are used in a professional or commercial application, which are warranted for a period of ninety (90) days for parts and labour and are subject to the terms and conditions of the warranty.

### WARRANTY EXCLUSIONS

This warranty excludes:

- (a) Products purchased in a foreign country or purchased in Canada and taken to a foreign country.
- (b) Products purchased from a dealer not authorized by KENWOOD.
- (c) Products with the serial number defaced, altered or missing.
- d) Periodic check-ups which do not disclose any defects covered by this warranty.

### KENWOOD ELECTRONICS CANADA INC.

- (e) Defects resulting from disaster, accident, abuse, misuse lightning, power surges, neglect or lack of periodic maintenance, unauthorized modification or failure to follow
- instructions in the owner's manual. (f) Defects or damage as a result of repairs performed by a person or party not authorized by KENWOOD.
- (g) Defects resulting from the use of parts or devices that do not conform to KENWOOD specifications.
- (h) Damage or deterioration occurring to any exterior finishes cosmetic parts, tane heads, adaptors, antennas, cables, tapes, discs or faults or damage caused by defective or leaking batteries
- (i) Defects or damage occurring during shipping (claims should be presented to the shipping company).
- (j) Product voltage and /or line frequency conversions. (k) Product installation or removal charges.

### TO OBTAIN WARRANTY SERVICE

Should your Kenwood product require warranty service, deliver it to any authorized KENWOOD service centre and present the original copy of your bill of sale and this warranty card as proof of warranty, or send your product fully insured and freight prepaid to the pearest authorized KENWOOD service centre. To avoid possible shipping damage, make sure the product is properly packed. Include a copy of your original bill of sale and this warranty card as proof of warranty along with your name, home and /or work telephone number(s). a complete return address and a detailed description of the fault(s). Products repaired within warranty will be returned freight prepaid to destinations within Canada. The customer is responsible for all freight and related costs for the return of product(s) to destinations outside Canada.

### **ENTIRE WARRANTY**

This warranty constitutes the entire written warranty given by KENWOOD. No person, party, dealer or service centre or their agents or employees are authorized to extend or enlarge this warranty on behalf of KENWOOD by any written or verbal statement or advertisement or promotion, including any extended warranty program or plan that may be offered by the dealer or service centre, unless approved in writing by KENWOOD.

### DISCLAIMER

KENWOOD disciaims any responsibility for loss of time or use of the product or any other indirect, incidental or consequential damage to other products or goods, inconvenience or

### NOTICE TO CONSUMER

The provisions contained in this written warranty are not intended to itmit, modify, take away, disclaim or exclude any warranties or rights you may have which are set forth in any applicable provincial or federal laws or legislation.

### IMPORTANT

This warranty card by itself is not considered by KENWOOD as a valid proof of purchase. When applying for warranty repairs you must present the original copy of your birl of sale and this warranty card as proof of warranty, so we recommend that they be kept in a safe place, should they be required in the future.

KENWOOD ELECTRONICS CANADA INC. 6070 Kestrel Road, Mississauga, Ontario, Canada L5T 1S8 Tel.: (905) 670-7211 Fax: (905) 670-7248

### BRASIL

### JVC KENWOOD DO BRASIL COMÉRCIO DE ELETRÔNICOS LTDA

O fabricante garante o produto identificado na Nota Fiscal de venda ao consumidor contra qualque: defeiro de fabricação ou de matéria-prima durante o período de garantia. Esta garantia e válida no território brasileiro desde que o produto tenha sido adquirido no Brasil e distribuído pela JVC KENWOOD do Brasil Comércio de Eletrônicos Ltda.

### PERÍODO DE GARANTIA

Este produto e garantido pelo prazo de 01 (um) ano, incluindo o período estabelecido por lei. a partir da data de aquisição, comprovada mediante a apresentação da respectiva Nota Fiscal de venda ao consumidor final.

Eventuais reparos realizados no produto durante o período de garantia não implicam na dilatação do seu prazo.

### **EXCLUSÃO DA GARANTIA**

- (a) Produtos com o número de série ou certificado de garantia rasurados, adulterados ou ilegíveis: (b) Defeitos resultantes de acidentes (quedas, batidas e etc), uso em desacordo com o manual. de instruções, má utilização, ligação à fonte de tensão diferente da especificada no Manual de Instruções, modificações não autorizadas:
- (c) Danos causados por agentes da natureza (Ex: chuvas, raios, maresia, enchentes e etc);
- (d) Defeitos ou danos em decorrência de consertos realizados por pessoas não autorizadas:
- (e) Deteitos ou danos resultantes do uso de pegas ou dispositivos não conformes às especificações da JVC KENWOOD:
- (f) Danos ou deteriorações aos acabamentos externos, partes cosmeticas, cabos, chicotes. parafusos de fixação, luvas, alças, bolsas, estojos, adaptadores, antenas, fitas, cabeças gravadoras. CDs ou danos causados por pilhas defeituosas ou com vazamento: (g) Defeitos ou danos devido ao transporte (reclamações devem ser feitas junto à empresa
- (h) Qualquer outra causa que não esteja relacionada a defeitos de materia-prima e de fabricação.
- (i) Danos causados por tentativa de roubo ou furto: (i) Danos causados por uso de CDs de má qualidade
- (k) Danos decorrentes do desgaste natural do produto:
- Danos causados por mau uso. (derramamento de líquidos e/ou alimentos, corrosão exidação. exposição a umidade ou situações climáticas extremas, riscos ou quedas).

### CONSERTO EM GARANTIA

É indispensável a apresentação deste Certificado de Garantia devidamente preenchido. acompanhado da respectiva Nota Fiscal de compra do produto, desde que não apresente rasuras ou modificações.

O consumidor somente terá direito a estes beneficios, quando o produto for entregue diretamente no balcão de um Serviço Autorizado da JVC KENWOOD.

### O QUE NÃO É COBERTO PELA GARANTIA

Instalação e remoção do produto, despesas de frete, seguro e embalagem são de responsabilidade de proprietário.

Este produto é destinado exclusivamente ao uso domestico.

### IMPORTANTE:

Para qualquer informação sobre seu equipamento JVC KENWOOD, ou para obter o endereço do Serviço Autorizado mais proximo, acesse o site www.kenwood.com.br., ou lique para a Central de Atendimento JVC KENWOOD - Yel.: +55 (11) 3777-6771 com os dados abaixo preenchidos.

### JVC KENWOOD DO BRASIL COMÉRCIO DE ELETRÔNICOS LTDA Tel: (11) 3777-6771 www.kenwood.com.br

Nome do consumidor:	
Endereço:	CEP:
Cidade:	Estado:
Telefone:	*****
Data da compra: / /	Nota Fiscal:

### **GARANTIE KENWOOD**

KENWOOD ELECTRUNICS CANADA INC. (ci-apres appelee KENWOOD"), donne par écrit la garantie survante à l'acheteur. riginal de chaque nouveau produit Kenwood distribué au Canada par KENWOOD et achere à un concessionnaire autorisé. par KENWOOD

KENWOOD garantit, sous réserve des termes et des conditions énoncés di-dessous, que chaque nouveau produit Kenwood. dans des conditions d'empidi normales, est exempt de tous defauts. Si l'un defaut se produit pendant la période de garantie. KENWOOD s'engage à assumer le coût des pièces défectueuses et de la main-dipeuvre necessaires pour effectuer les réparations pourvu que de tels défauts sont attribuables a des pièces défectueuses employees lors de la fabrication du produit Kenwood ou a la main-dioeuvre ter qu'établi par KENWOOD ou nar l'un de ses centres de service autorisés. Apnelez KENWOOD pour vérifier si un concessionnaire ou un centre de service est autorise par KENWOOD

### PÉRIODE DE GARANTIE

Les nièces et la main-d'neuvre nécessaires nour la renaration. des produits Kenwood sont garanties pendant la période d'un (1) an a compter de la date d'achat, de bail ou de location originale. sauf dans les cas où les produits Kenwood sont employés dans un but professionnel ou commercial, où la garantie des pieces. et de la main-d'oeuvre demeure en vigueur pendant une periode de quatre-vingt-dix (90) jours sous reserve des termes et des conditions de la garantie.

### **EXCLUSIONS DE GARANTIE**

Cette narautie ne couvre nas:

- (a) les produits achetés à l'etranger ou achetes au Canada et transportés à l'etranger
- (b) les produits achetes à un concessionnaire non autorise nor KENWOOD
- (c) les produits dont le numero de serie manque, a eté efface
- d) les services d'entretien periodiques qui n'indiquent aucun defaut convert par cette parantie:

- (e) les défauts causés par les désastres, les accidents, les abus, les emplois incorrects, les éclairs, les surtensions de courant, les manques de soins ou d'entretiens périodiques. les modifications non autorisées ou les manques de respect du mode d'emploi:
- (f) les delauts ou les dommages causes lors de réparations effectuées par une personne ou par une partie non autorisée nar KENWOOD:
- (g) les défauts causés par l'emploi de pièces ou de dispositifs qui ne se conforment pas aux exigences de KENWOOD:
- (h) les finitions extérieures, les pièces cosmetiques, les têtes de bandes les adantateurs les autennes les câbles. les bandes, les disques endommages ou dépéris, ni les défauts ou dommages causés par des piles défectueuses ou qui fuient:
- (i) les défauts ou dommages qui se produisent pendant l'expédition des produits Kenwood (On devrait déposer de felles reclamations auprès des compagnies de transporty: (i) les conversions de tension et/ou de treguence du
- (k) les frais d'installation ou d'enfevement du produit.

### COMMENT OBTENIR DU SERVICE SOUS GARANTIE

Au cas ou un service sous garantie de votre produit Kenwood s avere necessaire, veuillez livrer le produit a n'importe quel centre de service KENWOOD et presenter la copie originale du contrat de vente et cette carte de garantie en tant que preuve de garantie ou veuillez faire parvenir votre produit assuré et port pave au centre de service KENWOOD autorise le plus proche. Pour eviter toutes possibilites de dommages pendant le transport, veuillez bien emballer le produit. Veuillez inclure une copie du contrat de vente original et cette carte de garantie en tant que preuve de garantie aussi bien que votre nomnumeros de terephone au poste de travail et/ou au domicile. votre adresse et une description detaillée des défauts. Les produits sous garantie repares seront refoumes port payé aux destinations à l'interieur du Canada. Le consommateur sera responsable de tous trais de transport et d'autres trais qui s'y rapportent pour faire expedier les produits à destinations à l'exterieur du Canada.

### L'ENTIÈRE GARANTIE

Cette garantie représente l'entière garantie donnée par écrit par KENWOOD KENWOOD oe se tient augunement resconsable de toutes extensions ni de toutes augmentations de cette garantie faites ou entreprises par toutes personnes, parties concessionnaires ou centres de service ou par leurs agents ou employés au nom de KENWOOD au moven d'affirmations verbales ou écrites, d'annonces ou de promotions, y inclus tous programmes ou plans de garantie étendue que puissent offri les concessionnaires ou les centres de service, à moins our KENWOOD n'y ait consenti par écrit d'avance.

### RENONCIATION

KENWOOD renonce à toutes responsabilités de perte de temps. d'emptoi du produit, de tous dommades indirects ou accessoires causés a d'autres produits ou biens, de tous inconvénients ou de toutes pertes commerciales.

### AVIS AUX CONSOMMATEURS

Les stigulations contenues dans la présente garantie écrite n'ont pas pour but de limiter, de modifier, de diminuer, de releter r d'exclure d'autres garanties ni droits énoncés dans n'importe quelles lois ou legislations provinciales ou fedérales.

### **IMPORTANT**

KENWOOD ne considère pas cette garantie toute seule comme etant une preuve d'achat valide. Lorsqu'on demande du service sous garantie. « faudra présenter la copie originale du contrat de vente aussi bien que cette carte de garantie en tant que preuve de narantie. On recommande de les conserver dans un lieu sûr au cas ou elles s'avéreraient nécesaires à l'avenir

KENWOOD ELECTRONICS CANADA INC. 6070 Kestrel Road, Mississauga, Ontario, Canada L5T 1S8 Téléphone: (905) 670-7211

Télécopieur: (905) 670-7248

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com