


\$1.00

OWNER'S GUIDE

ASSEMBLY • OPERATION • MAINTENANCE • PARTS

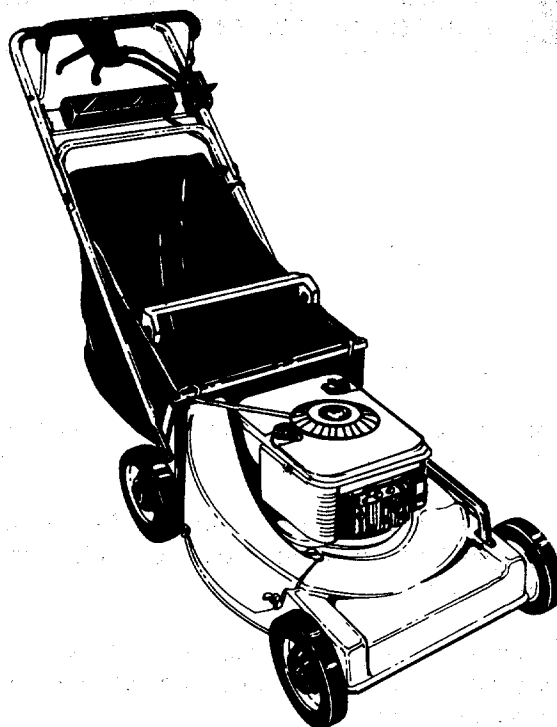

21"
6 SPEED
ELECTRIC START
CONVERTIBLE
ROTARY MOWER

Model Number
120-848E000

➔ IMPORTANT

The battery pack is shipped in a partially charged state and must be charged 16 hours prior to initial use. Follow charging instructions on page 13.

Important: Read Safety Rules and Instructions Carefully

INDEX

Slope Gauge	3	Lubrication	15
Contents of Hardware Pack	4	Maintenance	16
Safe Operation	5	Off-Season Storage	18
Assembly Instructions	6	Trouble Shooting Guide	19
Controls	12	Replacement Parts	20-23
Operation	12	Parts Information	Back Cover
Adjustments	14		



INSTRUCTIONS GIVEN WITH THIS SYMBOL ARE FOR PERSONAL SAFETY. BE SURE TO FOLLOW THEM.

NOTE: The use of any accessory on this Rotary Mower other than those manufactured by the mower manufacturer is **not** recommended.



WARNING: To reduce the risk of injury, do not operate mower unless rear trailing shield and guard or entire grass catcher is in its proper place.

NOTE: Under normal usage bag material is subject to wear and should be checked periodically. Be sure any replacement bag complies with the mower manufacturer's recommendations.

For replacement bags, use only factory authorized replacement bag No. 764-0257.

WARNING: This unit is equipped with an internal combustion engine and should not be used on or near any unimproved forest-covered, brush-covered or grass-covered land unless the engine's exhaust system is equipped with a spark arrester meeting applicable local or state laws (if any). If a spark arrester is used, it should be maintained in effective working order by the operator.


In the State of California the above is required by law (Section 4442 of the California Public Resources Code). Other states may have similar laws. Federal laws apply on federal lands. A spark arrester for the muffler is available through your nearest engine authorized service dealer.

Cut Along This Line

USE THIS SHEET AS A GUIDE TO DETERMINE SLOPES WHERE YOU MAY NOT OPERATE SAFELY.

SLOPE GAUGE

(Keep this sheet in a safe place for future reference.)

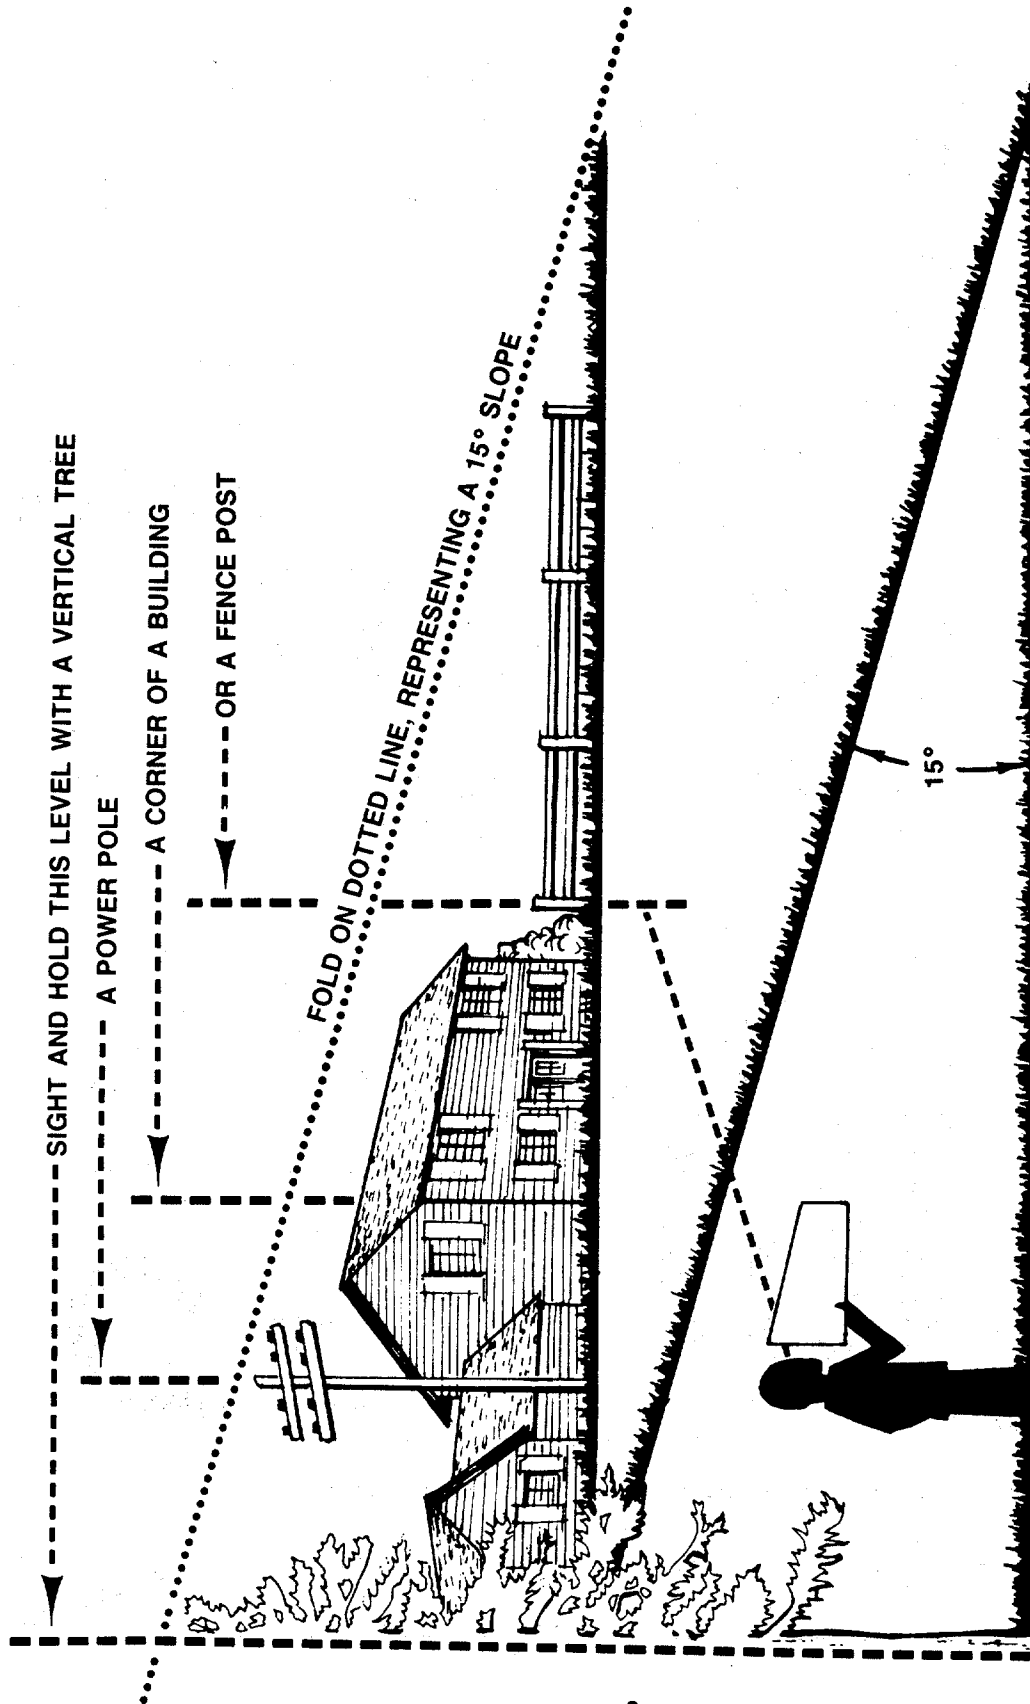








Do not mow on inclines with a slope in excess of 15 degrees (a rise of approximately 2½ feet every 10 feet). A riding mower could overturn and cause serious injury. If operating a walk-behind mower on such a slope, it is extremely difficult to maintain your footing and you could slip, resulting in serious injury.


Operate RIDING mowers up and down slopes, never across the face of slopes.

Operate WALK-BEHIND mowers across the face of slopes, never up and down slopes.

CONTENTS OF HARDWARE PACK

Remove this sheet from your owner's manual and lay the hardware on the illustration for identification purposes. After assembly, keep the Slope Gauge which is on the reverse side of this sheet for future use.
(Hardware pack may contain extra items which are not used on your unit.)
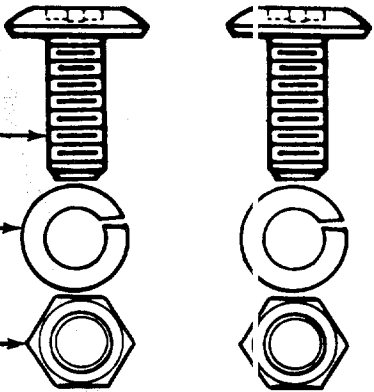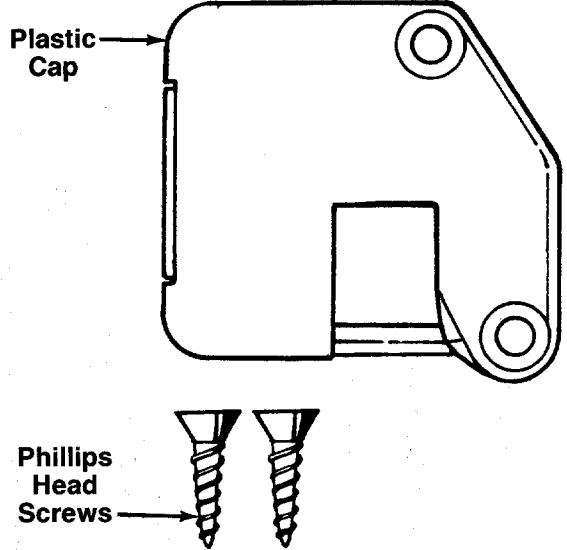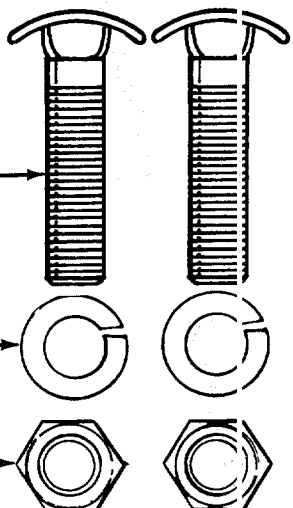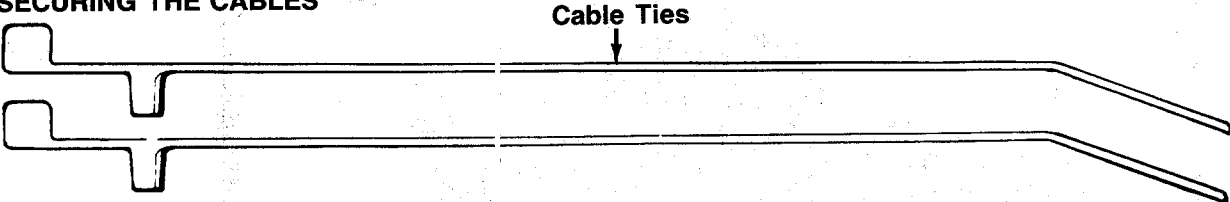
<p>A ATTACHING THE LOWER HANDLE</p>  <p>Truss Machine Screw 5/16-18 x 3/4" Long</p> <p>Split Washer 5/16" I.D.</p> <p>Hex Nut 5/16-18 Thread</p>	<p>E ATTACHING THE DRIVE CLUTCH CONTROL CABLE</p>  <p>Plastic Cap</p> <p>Phillips Head Screws</p>
<p>B ATTACHING THE UPPER HANDLE</p>  <p>Curved Head Bolts</p> <p>Split Washers 5/16" I.D.</p> <p>Hex Nuts 5/16-18 Thread</p>	<p>F FINAL ASSEMBLY</p>  <p>Plastic Plug (If Required)</p>
<p>C GRASS CATCHER ASSEMBLY</p>  <p>Self-Tapping Screws 1 1/4" Long</p>	 <p>Cable Clamp</p>
<p>D SECURING THE CABLES</p>  <p>Cable Ties</p>	



Cut Along This Line

IMPORTANT

RULES FOR SAFE OPERATION



THIS SYMBOL POINTS OUT IMPORTANT SAFETY INSTRUCTIONS WHICH, IF NOT FOLLOWED, COULD ENDANGER THE PERSONAL SAFETY AND/OR PROPERTY OF YOURSELF AND OTHERS. READ AND FOLLOW ALL INSTRUCTIONS IN THIS MANUAL BEFORE ATTEMPTING TO OPERATE YOUR LAWN MOWER. FAILURE TO COMPLY WITH THESE INSTRUCTIONS MAY RESULT IN PERSONAL INJURY. WHEN YOU SEE THIS SYMBOL—



HEED ITS WARNING.



DANGER

Your lawn mower was built to be operated according to the rules for safe operation in this manual. As with any type of power equipment, carelessness or error on the part of the operator can result in serious injury. If you violate any of these rules, you may cause serious injury to yourself or others.



TRAINING

1. Read this owner's guide carefully in its entirety before attempting to assemble or operate this machine. Be completely familiar with the controls and the proper use of this machine before operating it. Keep this manual in a safe place for future and regular reference and for ordering replacement parts.
2. Your rotary mower is a precision piece of power equipment, not a plaything. Therefore, exercise extreme caution at all times.
3. Never allow children to operate a power mower. Only persons well acquainted with these rules of safe operation should be allowed to use your mower.
4. Keep the area of operation clear of all persons, particularly small children and pets. Stop engine when they are in the vicinity of your mower to help prevent blade contact or thrown object injury. Although the area of operation should be completely cleared of foreign objects, an object may have been overlooked and could be accidentally thrown by the mower in any direction and cause serious personal injury to the operator or any others allowed in the area.



PREPARATION

1. Thoroughly inspect the area where the equipment is to be used. Remove all stones, sticks, wire, bones and other foreign objects which could be picked up and thrown by the mower in any direction and cause serious personal injury to the operator or any others allowed in the area.
2. Always wear safety glasses or eye shields during operation or while performing an adjustment or repair, to protect eyes from foreign objects that may be thrown from the machine in any direction.
3. Wear sturdy, rough-soled work shoes and close-fitting slacks and shirts to avoid entanglement in the moving parts. Never operate a unit in bare feet, sandals, or sneakers.
4. Check the fuel before starting the engine. Gasoline is an extremely flammable fuel. Do not fill the gasoline tank indoors, while the engine is running, or until engine has been allowed to cool for two minutes after running. Replace gasoline cap securely and wipe off any spilled gasoline before starting the engine as it may cause a fire or explosion.
5. Disengage the self-propelled mechanism or drive clutch on units so equipped before starting the engine.
6. The blade control handle is a safety device. Never attempt to bypass its operation. Doing so makes the safety device inoperative and may result in personal injury through contact with the rotating blade. The blade control handle must operate easily in both directions.
7. Never attempt to make a wheel or cutting height adjustment while the engine is running.
8. Never operate the equipment in wet grass. Always be sure of your footing. A slip and fall can cause serious personal injury. Keep a firm hold on the handle and walk, never run. Mow only in daylight or in good artificial light.



OPERATION

1. Do not change the engine governor settings or overspeed the engine. Excessive engine speeds are dangerous.
2. Do not put hands or feet near or under rotating parts. Keep clear of the discharge opening at all times as the rotating blade can cause injury.
3. Stop the blade when crossing gravel drives, walks or roads.
4. After striking a foreign object, stop the engine, remove the wire from the spark plug, and thoroughly inspect the mower for any damage. Repair the damage before restarting and operating the mower.
5. If the equipment should start to vibrate abnormally, stop the engine and check immediately for the cause. Vibration is generally a warning of trouble.
6. Shut the engine off and wait until the blade comes to a complete stop before removing the grass catcher or unclogging the chute. The cutting blade continues to rotate for a few seconds after the engine is shut off. Never place any part of the body in the blade area until you are sure the blade has stopped rotating.
7. Before cleaning, repairing or inspecting, make certain the blade and all moving parts have stopped. Disconnect the spark plug wire, and keep the wire away from the spark plug to prevent accidental starting.
8. Do not run the engine indoors.
9. Mow across the face of slopes, never up-and-down. Exercise extreme caution when changing direction on slopes. Do not mow excessively steep slopes. Always be sure of your footing. A slip and fall can cause serious personal injury.
10. Never operate mower without proper guards, plates or other safety protective devices in place.
11. Do not operate this mower with the chute door open, unless the complete grass catcher or chute deflector is properly mounted on the mower.



MAINTENANCE AND STORAGE

1. Check the blade and engine mounting bolts at frequent intervals for proper tightness.
2. Keep all nuts, bolts, and screws tight to be sure the equipment is in safe working condition.
3. Never store the equipment with gasoline in the tank inside of a building where fumes may reach an open flame or spark. Allow the engine to cool before storing in any enclosure.
4. To reduce fire hazard, keep the engine free of grass, leaves, or excessive grease.
5. Check the grass catcher bag frequently for wear or deterioration. For safety protection, replace only with new bag meeting original equipment specifications.

ASSEMBLY INSTRUCTIONS

IMPORTANT: This unit is shipped **WITHOUT GASOLINE** or **OIL**. After assembly, service engine with gasoline and oil as instructed in the separate engine manual packed with your unit.

NOTE: Reference to right or left hand side of the mower is observed from the operating position.

Tools Required for Assembly

- (1) Phillips Head Screwdriver
- (1) 1/2" Wrench*
- (1) 7/16" Wrench*
- (1) Flat Blade Screwdriver
- *Or one 6" Adjustable Wrench.

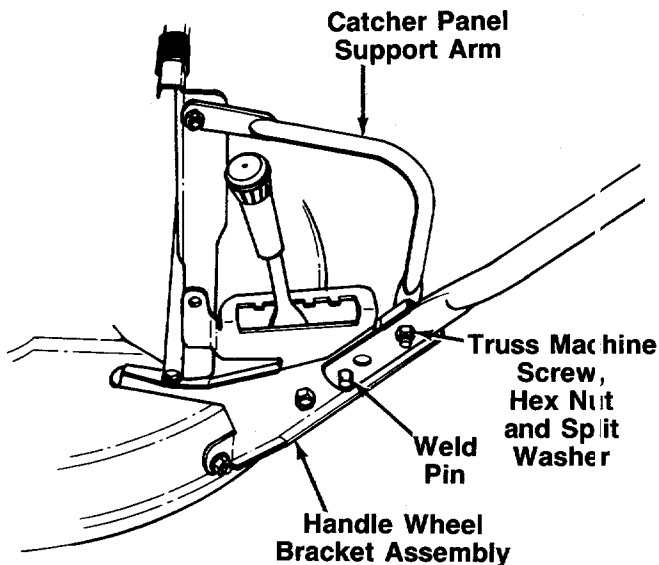


FIGURE 1.

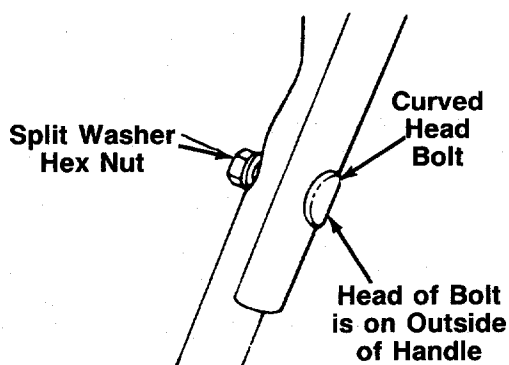


FIGURE 2.

UNPACKING

1. Remove the lawn mower from the carton by opening the top flaps and lifting the unit out. Be careful of the staples. Make certain all parts and literature have been removed from the carton before the carton is discarded.
2. Disconnect and ground the spark plug wire by hooking it into the "V" slot on the engine. Check beneath the deck for any cardboard packaging. Remove if present.
3. Stretch out all control cables and place on the floor. Be careful not to bend or kink the cables at any time during assembly.
4. Remove page four from this manual and lay the contents of the hardware pack on the illustration for identification.

ATTACHING THE LOWER HANDLE (Hardware A)

1. For shipping purposes your mower is set with the wheels in the lowest cutting height position. Raise the mower to the highest setting for assembly of lower handle.
2. On the left side of the mower, remove the truss machine screw, hex nut and split washer from the handle wheel bracket assembly as shown in figure 1.
3. Attach the lower handle by placing the bottom holes in the lower handle over the weld pins on the handle wheel bracket assemblies.
4. Pivot catcher panel support arm in position as shown in figure 1. Insert truss machine screw through catcher panel support arm, wheel bracket assembly and handle. Secure using the split washer and hex nut removed in step 2. Tighten securely.
5. Secure the right side of the handle to handle wheel bracket assembly using truss machine screw, 5/16" split washer and hex nut. Tighten securely.

ATTACHING THE UPPER HANDLE (Hardware B)

1. Place the upper handle in position over the lower handle. The label on the throttle control housing and the control lever must be facing up.
2. Secure the upper handle using the curved head bolts, split washers and hex nuts as shown in figure 2.

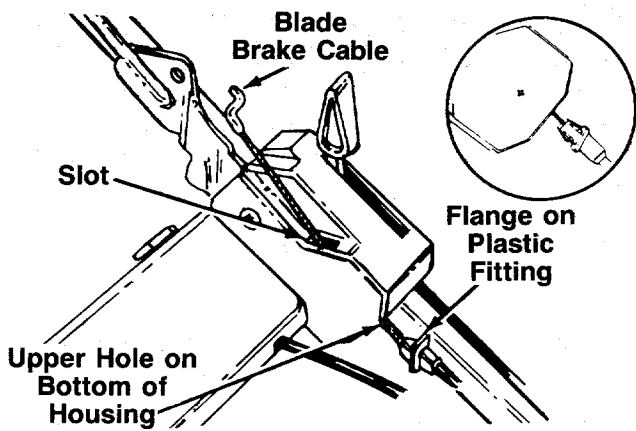


FIGURE 3.

ATTACHING THE BRAKE CABLE

1. The brake cable is attached to the engine, and has a "Z" fitting on the loose end. Route the brake cable in back of the engine, to the outside of the height adjustment handle and handle mounting bracket, and below the lower handle. Place end of cable into the upper hole on the bottom of the control housing, and through the slot as shown. The angle of the plastic flange must be positioned downward as shown in figure 3. Be careful not to bend or kink the cable at any time.
2. Push the plastic fitting until it locks into the control housing.



WARNING: Brake cable must be assembled as shown for proper blade brake operation.

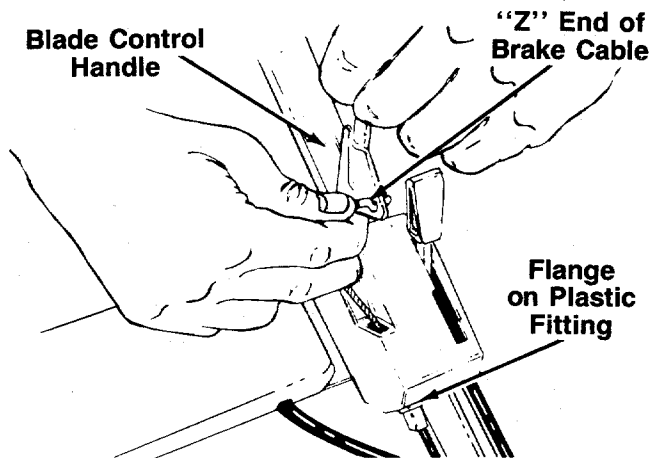


FIGURE 4.

3. Hook the "Z" end of the brake cable into the hole in the blade control handle from the inside to the outside as shown in figure 4.

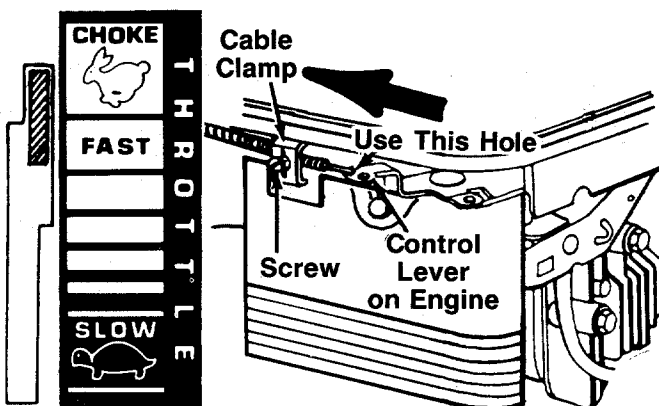


FIGURE 5.

ATTACHING THE THROTTLE CABLE

1. Push the throttle control lever on the handle all the way forward to CHOKE position. See figure 5.
2. The throttle control cable is attached to the upper handle. Route the throttle control cable under the lower handle. Route the cable to the outside of the handle wheel bracket assembly and height adjustment lever then in back of the engine. Hook the "Z" end of the throttle control cable into the hole in the control lever on the engine shown in figure 5.
3. Using a screwdriver, remove the screw and cable clamp shown in figure 5.
4. Push the control lever on the engine as far toward the rear of the engine as it will go. Secure the cable in this position with the cable clamp and screw.

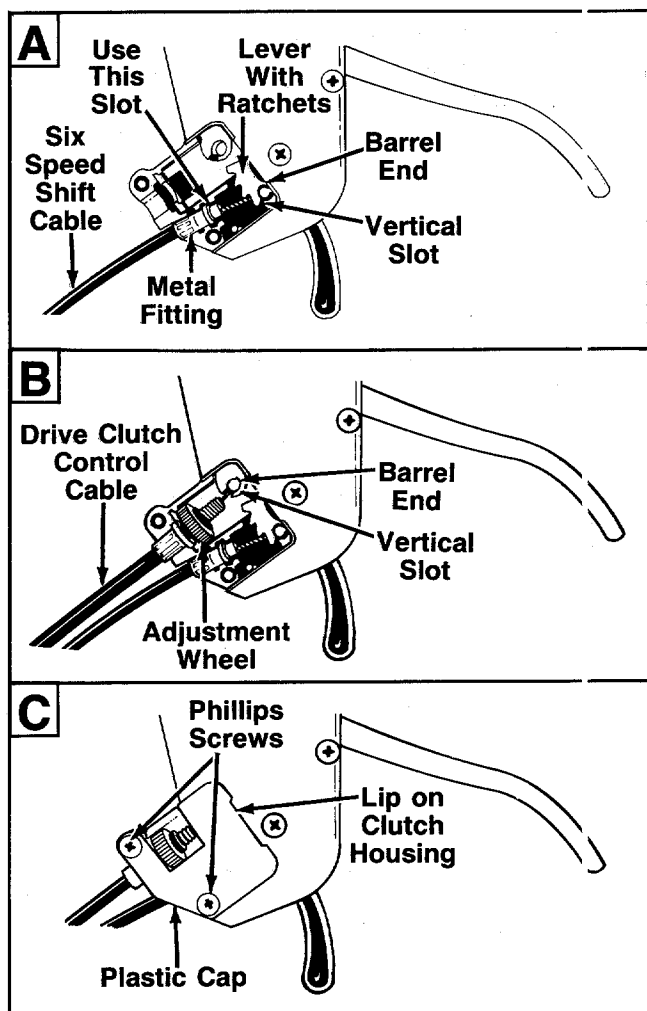


FIGURE 6.—Bottom View

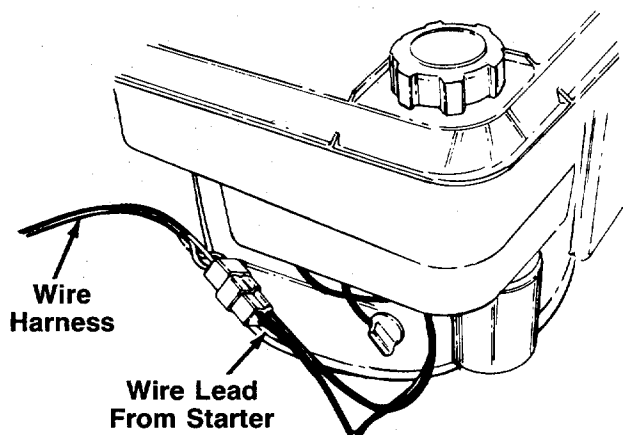


FIGURE 7.

ATTACHING THE SIX SPEED SHIFT CABLE AND DRIVE CLUTCH CONTROL CABLE (Hardware E)

Both the drive clutch cable and the six speed shift cable are attached to the deck. Attach both cables to the underside of the drive clutch control housing, located in the middle of the upper handle.

NOTE: The drive clutch cable is the cable with the adjustment wheel attached.

- Place the shift lever (located on the bottom of the drive clutch housing) in 1st speed (slow) position.
- Route the six speed shift cable to the outside of the height adjustment handle and handle mounting bracket. Attach as follows.
 - Slide the barrel end of the six speed shift cable into the hole provided in the six speed shift lever (lever with the ratchets). See figure 6A.
 - Slip the braided wire into the vertical slot as shown.
 - Slide the braided wire around in the horizontal slot.
 - Place the metal fitting on the end of the shift cable into the slot in the housing shown in figure 6A. Hold the fitting in this position as you assemble the drive clutch control cable.
- Assemble the drive clutch control cable as follows.
 - Slide the barrel end of the cable into the hole provided in the end of the drive clutch control lever. Slip the braided wire into the vertical slot as shown in figure 6B.
 - Slide the braided wire around in the horizontal slot.
 - Make certain the adjustment wheel is threaded onto the cable as far as possible as shown in figure 6B. Place the adjustment wheel into the clutch control housing.
- Secure the plastic cap to the clutch control housing using the two Phillips head screws. See figure 6C.



WARNING: Drive clutch adjustment must be checked before the unit is operated, as described in the operation section.

ATTACHING THE WIRE HARNESS

- Remove the wing nuts that secure the rear discharge chute assembly from the deck. Then remove the chute from the deck by lifting up on the two bottom corners of the discharge chute assembly, and sliding it off the deck.
- Plug the end of the wire lead coming from the starter on the engine into the plug on the end of the wire harness. See figure 7.

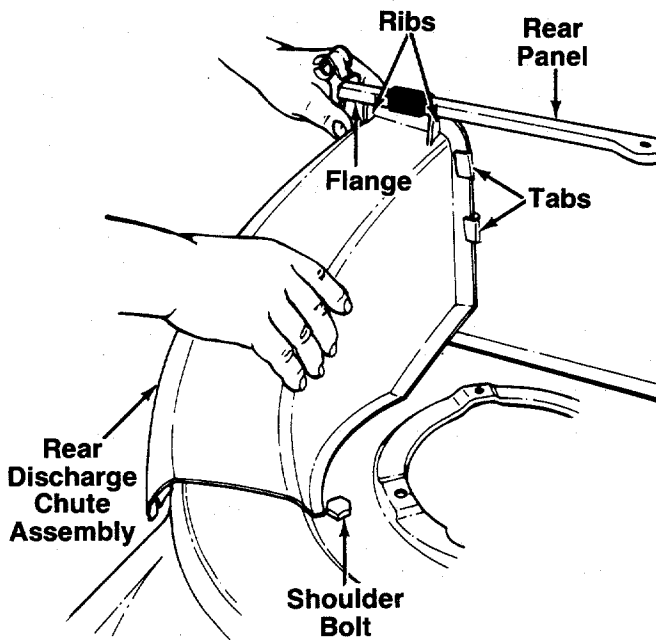


FIGURE 8.



WARNING: Never operate your unit without either the side chute deflector or entire rear discharge chute and grass catcher assembly in place.

3. Replace the rear discharge chute assembly as follows.

Slide the ribs on the discharge chute assembly under the flange on rear panel as you insert the side of the discharge chute under the two tabs. See figure 8.

The edge of the discharge chute assembly goes under the shoulder bolt on deck. Push down on the chute assembly, and slide the bottom corner slots over the bolts on side of deck.

Press down on the discharge chute assembly and secure with wing nuts. Make certain wing nuts are seated properly.

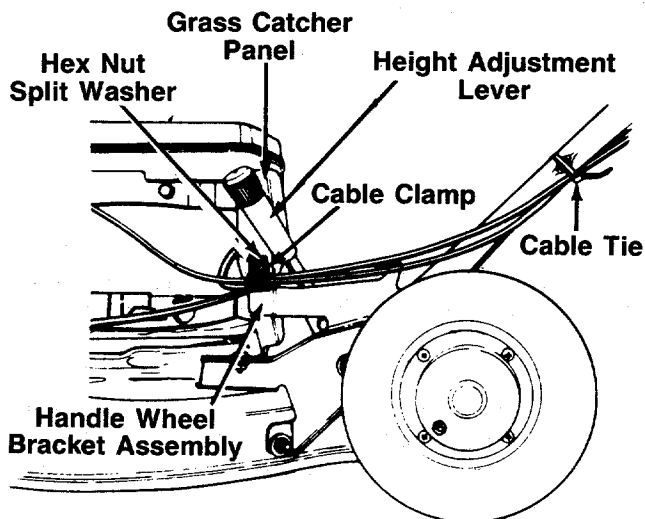


FIGURE 9.

SECURING THE CABLES (Hardware D)

Attach cables to the left handle wheel bracket assembly as follows, using the cable clamp provided.

1. Open the clamp and slip the cables inside.
2. Remove the hex nut and split washer from the side of the left handle wheel bracket assembly as shown in figure 9. Attach the cable clamp to the left hand wheel bracket assembly as shown. Secure with hardware just removed.
3. Place the height adjustment lever in the lowest position.

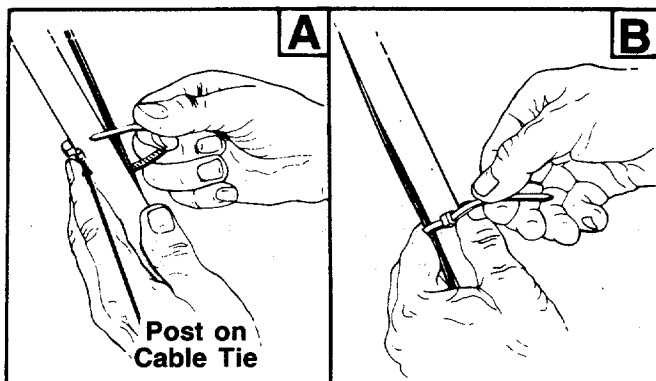


FIGURE 10.

Secure **all** the control cables to the left side of the handle with the cable ties as follows, taking the slack out of the cables so they do not contact the wheel.

1. Insert posts on cable ties into holes provided on the lower handle, one near the top and one near the bottom of lower handle. The holes may be on either the inside or outside of the handle. See figure 10A.
2. Secure the cables with the cable ties. See figure 10B.
3. Trim excess ends of cable ties.

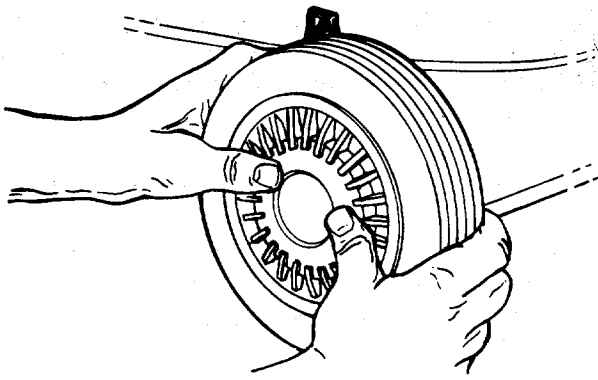


FIGURE 11.

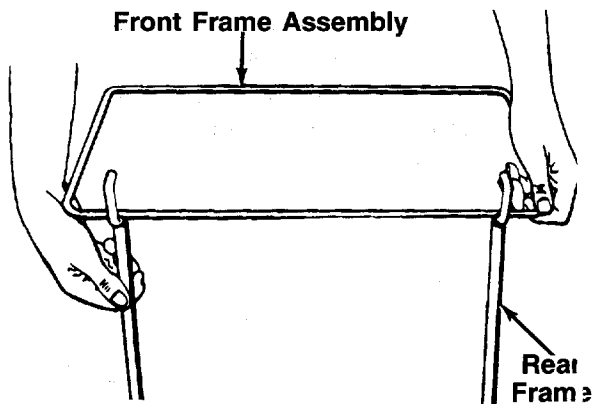


FIGURE 12.

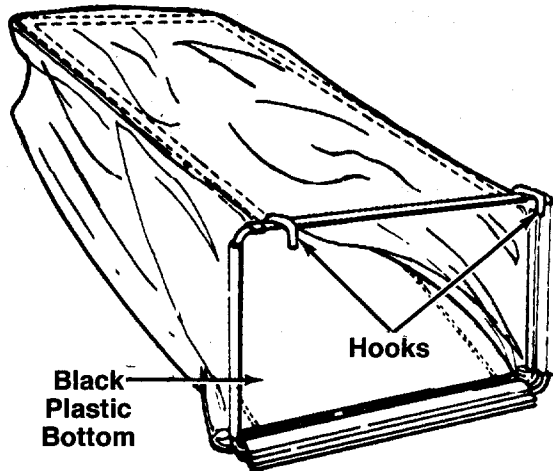


FIGURE 13.

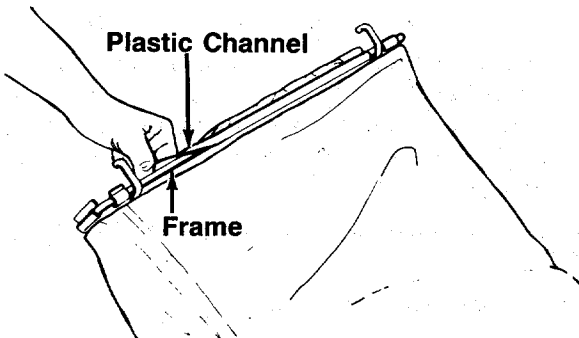


FIGURE 14.

FINAL ASSEMBLY OF MOWER (Hardware F)

1. If plastic plug is needed and is not already assembled, insert plastic plug into hole in the top rear of the deck by slipping one end of plug into hole, then pressing down on the other end of plug. Use a soft hammer if necessary.
2. Place hub caps in position against the inner hub of the wheel. Press firmly around the center portion of hub cap in a circular motion, similar to installing a lid on a round, plastic container. See figure 11. The hub caps are flexible and will snap over the 3 1/2" diameter wheel hubs.
3. Make certain all nuts and bolts are tightened securely.
4. **Be certain to charge the battery** as instructed in "Before Starting" section under Operation. Read instructions carefully.

GRASS CATCHER ASSEMBLY (Hardware C)

1. Join the rear frame and front frame assembly as shown in figure 12.

NOTE: Make certain the grass bag is turned right side out before assembling (warning label will be on the outside).

2. Place the frame inside the grass catcher bag. The bottom of the grass bag is black plastic. The hooks on the front frame go toward the top of the bag. See figure 13.

3. Secure front of bag to frame by working the plastic channels on bag over frame. See figure 14.

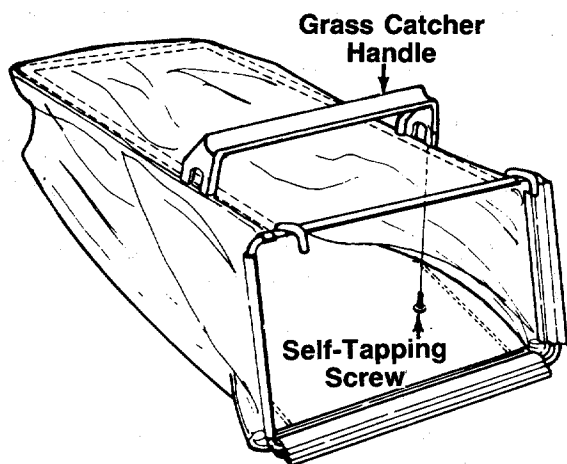


FIGURE 15.

4. Place the grass catcher handle in position on top of the grass bag and frame as shown in figure 15. Secure with four self-tapping screws.

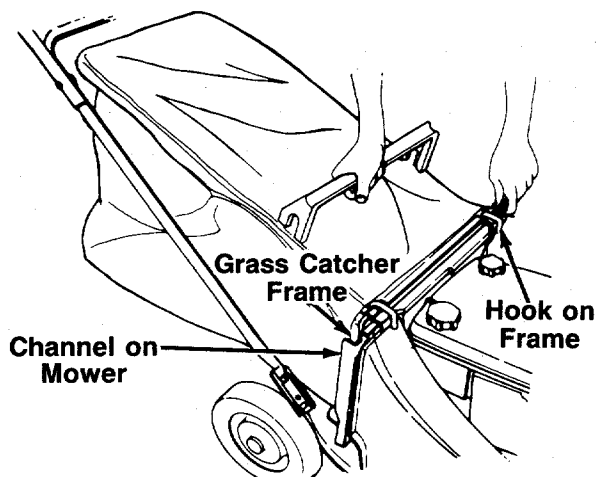


FIGURE 16.

TO ATTACH BAG TO MOWER

1. Hold the chute door on the catcher panel open as shown in figure 16.
2. Slide the frame of the grass catcher down into the channels on each side of the mower. The hooks on the frame go over the panel on the discharge chute. See figure 16.

To remove the grass catcher, lift the grass catcher straight up.

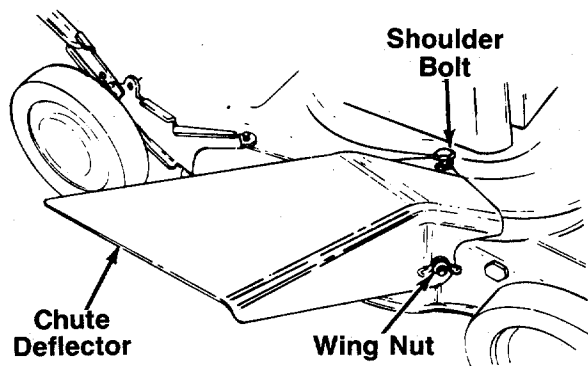


FIGURE 17.

TO CONVERT MOWER TO SIDE DISCHARGE

To convert your mower to a side discharge unit, proceed as follows.

1. Remove the rear discharge chute assembly by removing two wing nuts. Lift up on the two bottom corners of the discharge chute assembly, and slide it off the deck.
2. Attach the side chute deflector by first placing it over the rear bolt in the side of the deck. Then slide the notch in the top of the deflector around the shoulder bolt on top of the deck. Slide the notch in the side of the deflector around the front bolt in the side of the deck. See figure 17.

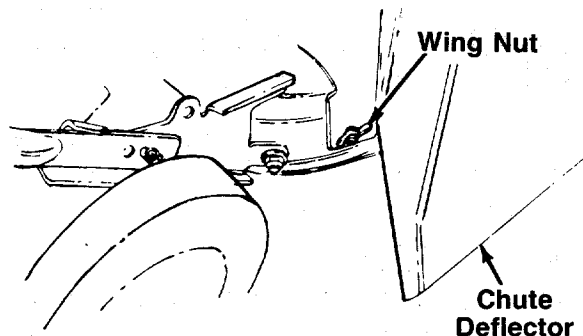


FIGURE 18.

3. Secure the front of the chute deflector to the bolt on the side of the deck with one wing nut. See figure 17. Secure the back of the chute deflector in the same manner. See figure 18.

CONTROLS

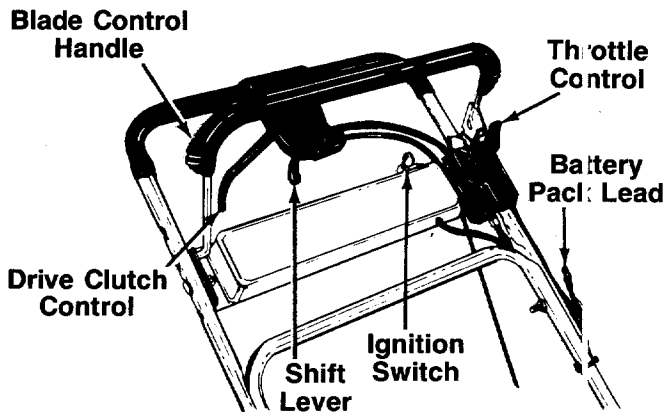


FIGURE 19.

BLADE CONTROL HANDLE

WARNING
THIS CONTROL MECHANISM IS A SAFETY DEVICE NEVER ATTEMPT TO BYPASS ITS OPERATIONS

The blade control handle is located on the upper handle of the mower. See figure 19. The blade control handle must be depressed in order to operate the unit. Release the blade control handle to stop the engine and blade.



WARNING: The blade will be rotating whenever the engine is running.

THROTTLE CONTROL

The throttle control is located on the left side of the upper handle. It is used to regulate the engine speed.



WARNING: The throttle control cannot be used to stop the engine.

IGNITION SWITCH

The ignition switch is located on the left side of handle panel. It is used for starting only. See figure 19.

DRIVE CLUTCH CONTROL

Squeezing the drive clutch control engages the drive mechanism to the rear wheels. Releasing the clutch control stops the rear wheels from driving. Release the drive clutch control to slow down when negotiating an obstacle, making a turn or stopping. See figure 19.

SHIFT LEVER

The six speed shift lever is located on the drive clutch control housing on the upper handle. See figure 19. This lever is used to select the operating speed of the mower. Release the drive clutch control when changing speeds.

IMPORTANT: Move the shift lever **ONLY** when the engine is running. Shifting the speeds with the engine off can cause damage to the unit.

OPERATION



FIGURE 20.

Keep hands and feet away from the chute area on cutting deck. See figure 20.

The operation of any lawn mower can result in foreign objects being thrown into the eyes, which can result in severe eye damage. Always wear safety glasses or eye shields. We recommend wide vision safety mask for over spectacles or standard safety glasses.



NOTE: For best results raise the cutting position until it is determined which height is best for your lawn. See cutting height adjustment section.

GAS AND OIL FILL-UP

Service the engine with gasoline and oil as instructed in the separate engine manual packed with your mower. Read instructions carefully.



WARNING: Never fill fuel tank indoors, with engine running or until the engine has been allowed to cool for at least two minutes after running.

BEFORE STARTING



DANGER: The battery contains corrosive fluid and toxic material. **HANDLE WITH CARE.** Keep away from children. Do not puncture, disassemble, mutilate or incinerate. Explosive gases could be vented during charging or discharging. Use in a well-ventilated area, away from sources of ignition.

1. Charge battery for 16 hours before initial use. DO NOT CHARGE LONGER THAN 20 HOURS.

IMPORTANT: Use only the battery charger supplied with this mower.

To charge the battery, first remove the protective cap from the end of the battery pack lead. See figure 13. Always plug charger lead into the battery pack lead before inserting battery charger plug into 120 volt standard household outlet.

After charging, disconnect battery charger plug from household outlet first, then disconnect charger lead from battery pack lead.



WARNING: Do not remove the battery pack from the handle panel for any reason other than replacement. When replacing the battery pack, refer to instructions in Maintenance section.

2. Before each use, check for proper drive clutch operation by performing the following before starting the engine:

With the drive clutch control released, push mower forward. It should move freely. Pull mower backward. It should move freely.

If it does not and the rear wheels tend to lock up, the clutch may not be releasing completely. Do not start the engine until corrections have been made. Check the control cable for severe bend, kinks and binding, or grass build-up in the pulley groove. Correct and adjust as required. Refer to adjustment section for additional information.

3. Attach spark plug wire to spark plug. Make certain the metal loop on the end of the spark plug wire (inside the rubber boot) is fastened securely over the metal tip on the spark plug. See figure 21.

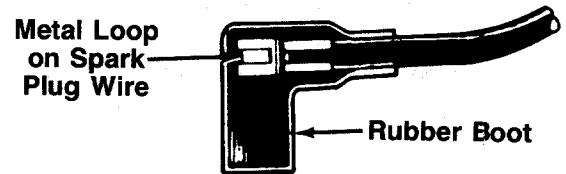


FIGURE 21.

4. The fuel shut-off valve is located beneath the fuel tank. The fuel shut-off valve should be in the open position. See figure 22. Open fuel shut-off valve if it is closed.

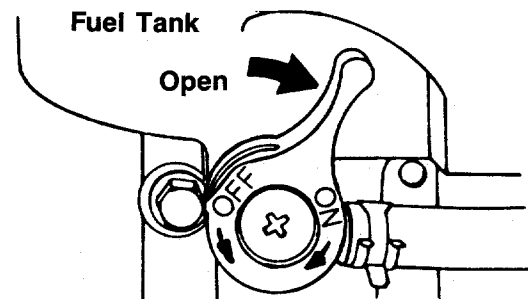


FIGURE 22.

TO START ENGINE AND ENGAGE BLADE

IMPORTANT: Move the shift lever only when the engine is running. Shifting the speeds with the engine off can cause damage to the unit. Disengage the drive clutch control when shifting speeds.



WARNING: When starting the unit for the first time, place mower in first speed (slow) position. Face the mower against a solid object such as a wall, fence, etc. Start the unit, and if it shows any signs of motion with the drive clutch control disengaged, shut the engine off immediately. Make certain the drive clutch control is adjusted so the drive belt is as loose as possible. Refer to the Adjustment Section.

1. Move the throttle control lever to CHOKE position. (A warm engine may not require choking.)
2. Standing behind the unit, depress the blade control handle and hold it against the upper handle. Make certain drive clutch control handle is released.
3. Turn the ignition key to the right to start the engine. Release the key after engine starts.
4. After engine starts, move throttle control to FAST or desired engine speed.

NOTE: The engine on your unit is provided with an auxiliary recoil starter system. To start the engine using the auxiliary starter system, proceed as follows.

A. Depress the blade control handle, and hold it against the upper handle.

B. Grasp the recoil starter handle, slowly pull the rope out from the engine about two feet and hold rope in this position.

C. Step behind the handle into the operating position. With the blade control handle still depressed, pull recoil starter handle using a quick, firm motion. Repeat until engine starts. After engine starts, return rope slowly to the engine.

NOTE: If any problems are encountered, refer to the Trouble Shooting Guide on page 19.



WARNING: Never operate your unit without either the side chute deflector or entire rear discharge chute and grass catcher assembly in place.

TO STOP ENGINE AND BLADE

1. Release the blade control handle to stop the engine and blade.



WARNING: The blade continues to rotate for a few seconds after the engine is shut off.

2. Disconnect the spark plug wire and ground it against the engine to prevent accidental starting while equipment is unattended.

USING YOUR ROTARY MOWER

Be sure that lawn is clear of stones, sticks, wire, or other objects which could damage lawn mower or engine. Such objects could be accidentally thrown by the mower in any direction and cause serious personal injury to the operator and others.

For the best results, do not cut wet grass because it tends to stick to the underside of the mower, preventing proper discharge of grass clippings, and could cause you to slip and fall. New grass, thick grass or wet grass may require a narrower cut. Speed of the mower should be adjusted to the condition of the lawn.

When using the side discharge mower, the best mowing pattern is one that allows the clippings to discharge towards the uncut part of the lawn. This permits recutting of the clippings to further pulverize them. When cutting high weeds, discharge towards cut portion, then recut at right angles to first direction.

For best results, cut off one-third or less of the total length of the grass. Lawn should be cut in the fall as long as there is growth.

This mower is designed to be operated at full throttle to give you the best cut and do the most effective job of bagging the cut grass.



WARNING: If you strike a foreign object, stop the engine. Remove wire from spark plug, thoroughly inspect the mower for any damage, and repair the damage before restarting and operating the mower. Extensive vibration of the mower during operation is an indication of damage. The unit should be promptly inspected and repaired.

ADJUSTMENTS



WARNING: Do not at any time make any adjustment to lawn mower without first stopping engine and disconnecting spark plug wire.

DRIVE CLUTCH CONTROL ADJUSTMENT

Use the adjustment wheel located on the underside of the clutch control housing to tighten the drive belt if mower does not self-propel with the drive clutch control engaged, or if drive belt is slipping (unit hesitates while engine maintains the same speed). See figure 23.

In addition, the adjustment wheel may also be used to determine the position in which the drive clutch control is engaged. If it is more comfortable to have the drive engaged with the lever further away from the handle, tighten the drive belt.

Make certain to retest the unit for neutral as instructed in the Operation Section. Move the adjustment wheel in the opposite direction to loosen the drive belt if necessary.

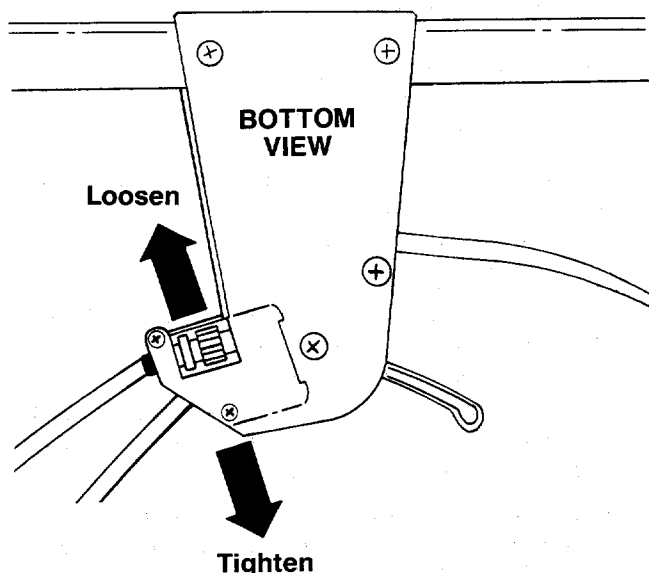


FIGURE 23.

CUTTING HEIGHT ADJUSTMENT

The height adjustment handle is located on the left side of the deck. The handle may be placed in one of nine cutting height positions. Push the handle to the left and then either forward to lower the cutting height or backward to raise the cutting height. See figure 24.

For rough or uneven lawns, move the height adjustment handle to a position which will give a higher cutting height.

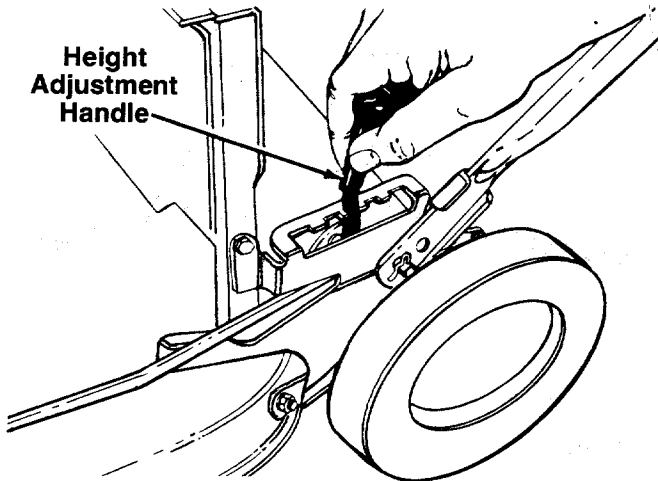


FIGURE 24.

THROTTLE

The throttle control wire assembly can be adjusted if necessary. Remove the screw and cable clamp shown in figure 5. Remove the cable from the clamp. Adjust as instructed in step 4 of "Attaching the Throttle Control Cable" in Assembly Instructions.

SIX SPEED SHIFT CABLE ADJUSTMENT

Periodic adjustment of the six speed shift cable may be required due to normal stretch and wear on the cable. Adjustment is needed if all six speeds cannot be obtained.

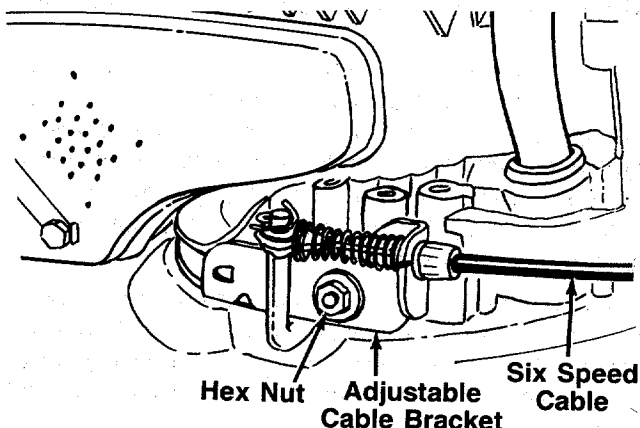


FIGURE 25.

The adjustable cable bracket is located on the left side of the mower, beside the engine. To adjust, loosen the hex nut which secures the adjustable cable bracket.

See figure 25. Pull backward on the bracket (toward the rear of the mower). Retighten the hex nut. Test the speeds on the mower (engine **must** be running).

CARBURETOR ADJUSTMENTS



WARNING: If any adjustments are made to the engine while the engine is running (e.g. carburetor), keep clear of all moving parts. Be careful of heated surfaces and muffler.

Minor carburetor adjustment may be required to compensate for differences in fuel, temperature, altitude and load. Refer to the separate engine manual packed with your mower for carburetor adjustment information.

NOTE: A dirty air cleaner will cause an engine to run rough. Be certain air cleaner is clean and attached to the carburetor before adjusting carburetor.

LUBRICATION



WARNING: Always stop engine and disconnect spark plug wire before cleaning, lubricating or doing any kind of work on lawn mower.

Blade Control—Lubricate the pivot points on the blade control handle and the brake cable at least once a season with light oil. See figure 26. The blade control must operate freely in both directions.

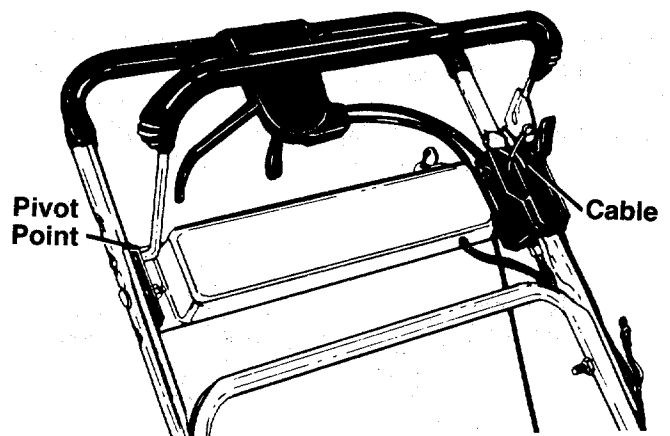


FIGURE 26.

Wheels—Lubricate the wheel bearings at least once a season with light oil. Also, if the wheels are removed for any reason, lubricate the surface of the axle bolt and the inner surface of the wheel with light oil. A 4 oz. plastic bottle of light oil lubricant is available. Order part number 737-0170. Engine oil may also be used.

Engine—Follow engine manual for lubrication instructions.

Throttle—Periodically lubricate throttle control lever and throttle wire assembly with a few drops of light oil for ease of operation.

Transmission—The transmission is pre-lubricated and sealed at the factory. It does not require checking. If disassembled for any reason, fill with 2 ounces of Alvania grease, part number 737-0168.

MAINTENANCE



WARNING: Be sure to disconnect and ground the spark plug wire before performing any repairs or maintenance.

NOTE: When tipping the unit, empty the fuel tank and keep engine spark plug side up.

TROUBLE SHOOTING

Refer to page 19 of this manual for trouble shooting information.

BATTERY PACK REPLACEMENT

Remove the battery pack from the handle panel for replacement only. Do not separate the batteries for any reason. Dispose of batteries properly.



WARNING: Batteries contain sulfuric acid which may cause burns. Do not short circuit or mutilate in any way. Do not put batteries in fire. They may burst or release toxic materials.

When replacing battery pack in handle panel, battery pack must be positioned with the positive terminal to the right hand side and the negative terminal to the left hand side of panel. See figure 27. Replacing the battery pack incorrectly will cause serious damage.

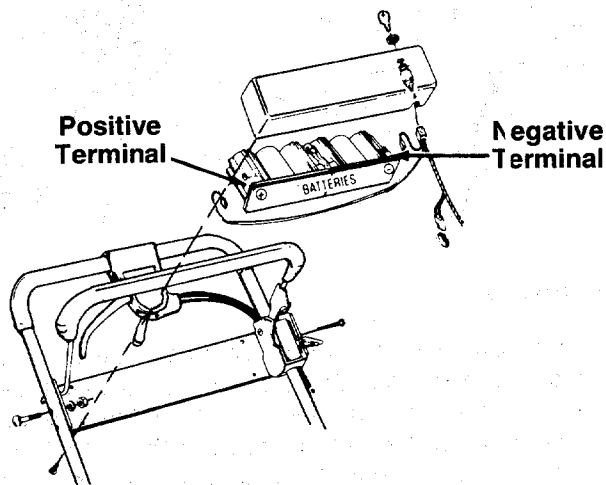


FIGURE 27.

The positive lead on the wire harness has the smaller connector. Connect the positive lead to the positive side of the battery pack, then connect the negative side.

IN-LINE FUSE

The unit is equipped with an in-line fuse. If unit fails to start, check the fuse in the wiring harness by turning the end of the fuse holder and pulling apart. See figure 28. Replace with standard automotive 7½ amp fuse.

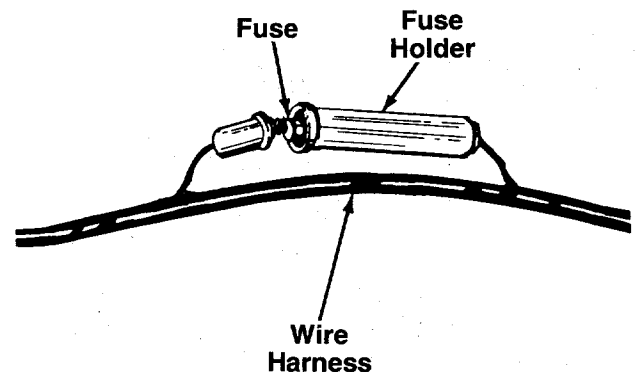


FIGURE 28.

CUTTING BLADE

When removing the cutting blade for sharpening or replacement, protect hands by using heavy gloves or a rag to grasp the cutting blade. Remove the bolt and bell washer which hold the blade and adapter to the engine crankshaft. Remove the blade and adapter from the crankshaft.

If the blade or blade adapter needs replacing, remove the two small bolts, lock washers and nuts which hold the blade to the adapter.



WARNING: Periodically inspect the blade adapter for cracks, especially if you strike a foreign object. Replace when necessary.

When sharpening the blade, follow the original angle of grind as a guide. It is **extremely important** that each cutting edge receives an equal amount of grinding to prevent an unbalanced blade. An unbalanced blade will cause excessive vibration when rotating at high speeds, may cause damage to the mower and could break, causing personal injury.

It is recommended that the blade always be removed from the adapter for the best test of balance. The blade can be tested by balancing it on a round shaft screwdriver. Remove metal from the heavy side until it balances evenly.

Before reassembling the blade and the blade adapter to the unit, lubricate the engine crankshaft and the inner surface of the blade adapter with light oil. Lubricating the bolt holes, bolts and inner surface of the nuts with

light oil is also recommended. A 4 oz. plastic bottle of light oil lubricant is available. Order part number 737-0170. Engine oil may also be used.

When replacing the blade, be sure to install the blade with the side of the blade marked "Bottom" (or with part number) facing the ground when the mower is in the operating position.

Blade Mounting Torque

Center Bolt and Blade Adapter Bolts: 375 in. lb..min., 450 in. lb. max.

To insure safe operation of your unit, **all** nuts and bolts must be checked periodically for correct tightness.

DECK

The underside of the mower deck should be cleaned after each use to prevent a buildup of grass clippings, leaves, dirt or other matter. If this debris is allowed to accumulate, it will invite rust and corrosion, and may cause an uneven discharge of grass clippings at the next cutting.

The deck may be cleaned by tilting the mower and scraping clean with a suitable tool (make certain the spark plug wire is disconnected).

ENGINE

Refer to the separate engine manual for engine maintenance instructions.

Maintain **engine oil** as instructed in the separate engine manual packed with your unit. Read and follow instructions carefully.

Service **air cleaner** every 25 hours under normal conditions. Clean every few hours under extremely dusty conditions. Poor engine performance and flooding usually indicates that the air cleaner should be serviced. To service the air cleaner, refer to the separate engine manual packed with your unit.

The **spark plug** should be cleaned and the gap reset once a season. Spark plug replacement is recommended at the start of each mowing season; check engine manual for correct plug type and gap specifications.

Clean the engine regularly with a cloth or brush. Keep the cooling system (blower housing area) clean to permit proper air circulation which is essential to engine performance and life. Be certain to remove all grass, dirt and combustible debris from muffler area.

STORAGE OF THE BATTERY

The battery must be stored with a full charge. A discharged battery will freeze.

IMPORTANT: All batteries discharge during storage.

Recharge battery every two months and before returning to service. Refer to charging instructions on page 13.

BELT REMOVAL AND REPLACEMENT

1. Disconnect the spark plug wire and ground it against the engine.
2. Drain the fuel tank or place a piece of plastic beneath the cap to prevent gasoline leakage.
3. Remove the grass bag, rear discharge chute assembly and catcher panel.
4. Remove the transmission belt cover by removing three bolts. See figure 29.
5. Tip the mower on its side, and block securely.

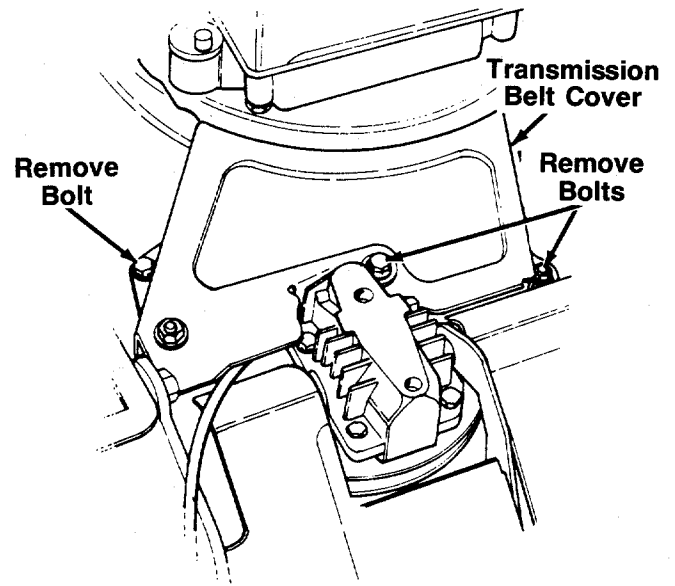


FIGURE 29.

6. Remove the center bolt which secures the blade to the crankshaft. See figure 30. Remove the blade, blade adapter and pulley half. Remove the belt.
7. Remove the inside belt guard by removing two self-tapping screws. A 3/8" wrench is required. See figure 30.

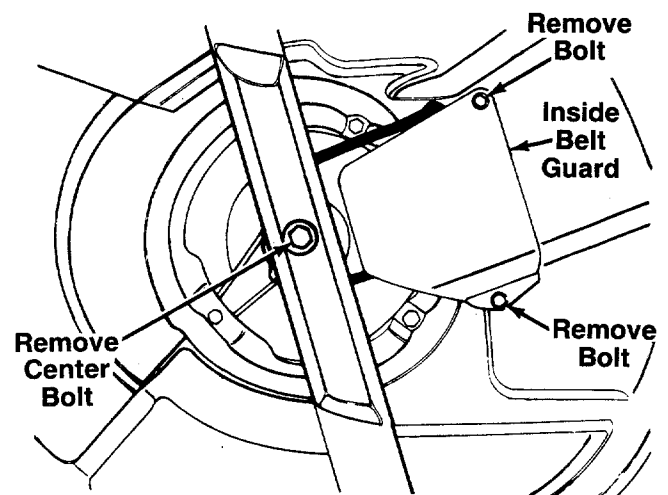


FIGURE 30.

8. Remove the belt from between the idler pulley and the belt guard on the idler pulley bracket. Refer to figure 32.
9. Remove the belt from the transmission pulley.
10. Assemble the new belt as follows.
 - A. Push the idler pulley up out of the way as shown in figure 31.
 - B. Slide the belt in from the rear of the deck, and place it around the transmission pulley. See figure 31.
 - C. Release the idler pulley so it falls down into position. Slide the belt in between the idler pulley and the belt guard on the idler pulley bracket as shown in figure 32.
 - D. Grease the crankshaft. Place belt between the two pulley halves, and reassemble the blade adapter and blade. Reassemble the inside belt guard.
 - E. Reassemble the transmission belt cover, following instructions in step 4 in reverse order.

NOTE: When reassembling the transmission belt cover, be certain the belt guard on the transmission cover is approximately 1/8" away from the belt. Make certain to tighten all nuts and bolts securely. If plastic was placed under the gas cap, be certain to remove it.

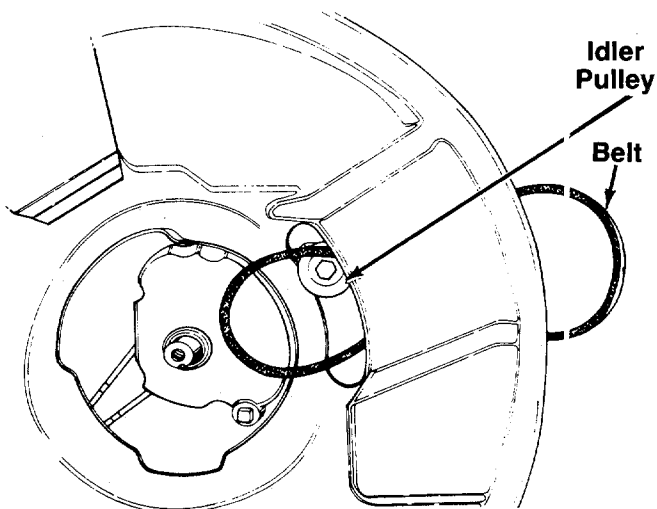


FIGURE 31.

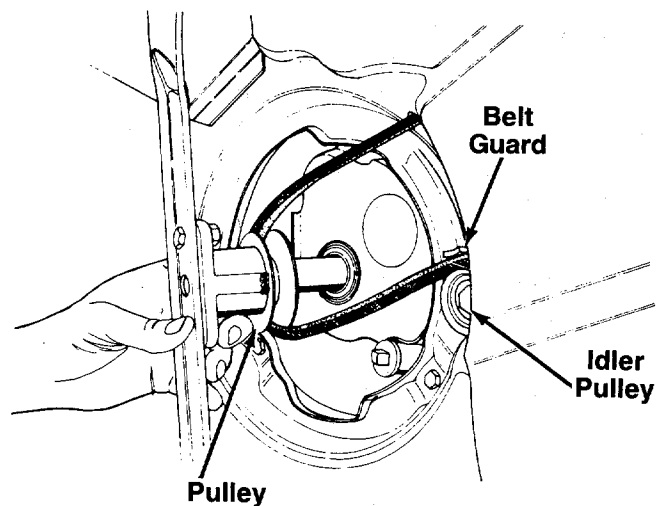


FIGURE 32.

OFF-SEASON STORAGE

The following steps should be taken to prepare lawn mower for storage.

1. Clean and lubricate mower thoroughly as described in the lubrication instructions.
2. Refer to engine manual for correct engine storage instructions.
3. Coat mower's cutting blade with chassis grease to prevent rusting.
4. Store mower in a dry, clean area.

NOTE: When storing any type of power equipment in an unventilated or metal storage shed, care should be taken to rustproof the equipment. Using a light oil or silicone, coat the equipment, especially cables and all moving parts.

Trouble Shooting Guide

Trouble	Possible Cause(s)	Corrective Action
Engine fails to start	<ol style="list-style-type: none"> 1. Blade control handle disengaged. 2. Spark plug wire disconnected. 3. Throttle control lever not in CHOKE position. 4. Fuel shut-off valve closed. 5. Discharge battery. 6. Fuel tank empty, or stale fuel. 7. Blocked fuel line. 8. Faulty spark plug. 9. Engine flooded. 	<ol style="list-style-type: none"> 1. Engage blade control handle. 2. Connect wire to spark plug. 3. Move throttle lever to CHOKE position. 4. Open fuel shut-off valve. 5. Charge battery or use auxiliary recoil starter as instructed in Operation section. 6. Fill tank with clean, fresh gasoline. 7. Clean fuel line. 8. Clean, adjust gap or replace. 9. Remove spark plug, dry the plug, and crank engine with plug removed and throttle in off position. Replace spark plug, connect wire and resume starting procedures.
Engine runs erratic	<ol style="list-style-type: none"> 1. Unit running in CHOKE position. 2. Spark plug wire loose. 3. Blocked fuel line or stale fuel. 4. Vent in gas cap plugged. 5. Water or dirt in fuel system. 6. Dirty air cleaner. 7. Carburetor out of adjustment. 	<ol style="list-style-type: none"> 1. Move throttle lever to FAST position. 2. Connect and tighten spark plug wire. 3. Clean fuel line; fill tank with clean, fresh gasoline. 4. Clear vent. 5. Drain fuel tank. Refill with fresh fuel. 6. Clean air cleaner.† 7. Adjust carburetor.†
Engine overheats	<ol style="list-style-type: none"> 1. Engine oil level low. 2. Air flow restricted. 3. Carburetor not adjusted properly. 	<ol style="list-style-type: none"> 1. Fill crankcase with proper oil. 2. Remove blower housing and clean.† 3. Adjust carburetor.†
Occasional skip (hesitates) at high speed	<ol style="list-style-type: none"> 1. Spark plug gap too close. 2. Carburetor idle mixture adjustment improperly set. 	<ol style="list-style-type: none"> 1. Adjust gap to .030". 2. Adjust carburetor.†
Idles poorly	<ol style="list-style-type: none"> 1. Spark plug fouled, faulty or gap too wide. 2. Carburetor improperly adjusted. 3. Dirty air cleaner. 	<ol style="list-style-type: none"> 1. Reset gap to .030" or replace spark plug. 2. Adjust carburetor.† 3. Clean air cleaner.†
Excessive vibration	<ol style="list-style-type: none"> 1. Cutting blade loose or unbalanced. 2. Bent cutting blade. 	<ol style="list-style-type: none"> 1. Tighten blade and adapter. Balance blade. 2. Replace blade.
Mower will not discharge grass	<ol style="list-style-type: none"> 1. Engine speed too low. 2. Wet grass. 3. Excessively high grass. 	<ol style="list-style-type: none"> 1. Set throttle between 3/4 and full throttle. 2. Do not mow when grass is wet; wait until later to cut. 3. Mow once at a high cutting height, then mow again at desired height or make a narrower cutting swath (1/2 width).
Uneven cut	Dull blade.	Sharpen or replace blade.

†Refer to separate engine manual packed with your unit.


Note: For repairs beyond the minor adjustments listed above, contact your local authorized service dealer.

Model 848E

812-00104
upper handle assy comp.
(does not incl. battery pack assy)

725-0298 FUSE
725-1428 FUSE HOLDER
725-1442 HARNESS

812-00107

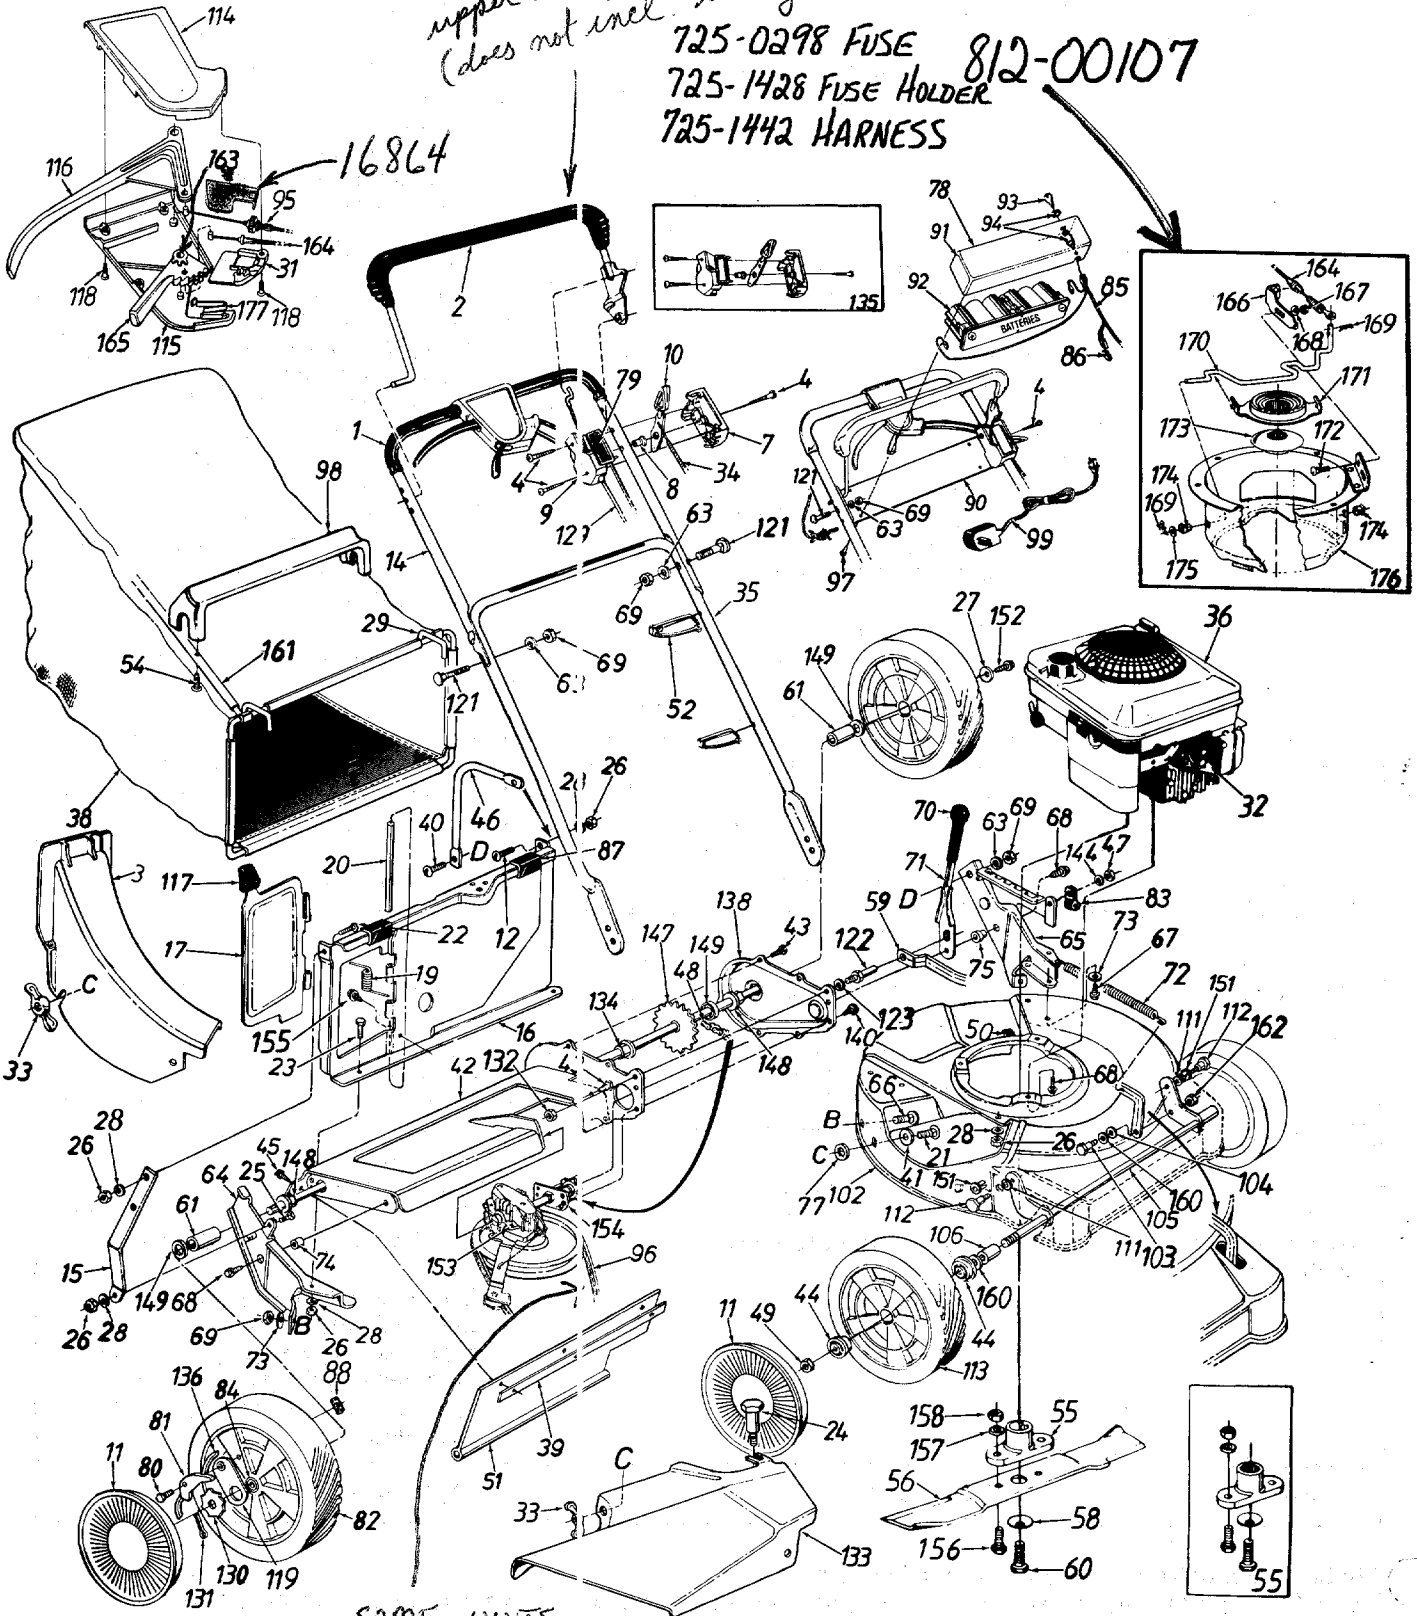

SOME UNITS
MADE WITH
WRONG BELT
PLANT USE 75110346 = 31.20

Model 848E

PARTS LIST FOR MODEL 848E ROTARY MOWER

EF. IO.	PART NO.	CODE	DESCRIPTION	REF. NO.	PART NO.	CODE	DESCRIPTION
1	720-0225		Foam Grip—2 Req'd. (Optional)	60	710-0757		Hex Bolt 7/16-20 x 1.5" Lg. (Grade 5)
2	731-0609		Control Handle Ass'y.—L.H.				Spacer .513" I.D. x .703" O.D. x .69" Lg.
3	731-1023		Rear Discharge Chute Ass'y.	61	748-0190		L-Wash. 5/16" I.D.*
4	710-0796		Truss Mach. Scr. #12 x 1.50" Lg.	63	736-0119		R.H. Handle Wheel Brkt. Ass'y.
7	731-0817A		Control Panel Half	64	16136A		L.H. Handle Wheel Brkt. Ass'y.
8	731-0524		Control Disc Pin	65	16137B		Carriage Bolt 5/16-18 x .62"*
9	731-0816A		Clutch Panel Half	66	710-0260		Hex Wash. Hd. B-Tap Scr. 5/16-18
10	731-0528B		Throttle Control Lever	67	710-0603		Hex Wash. Hd. TT-Tap Scr. 3/8-16
11	731-0981A	N	Hub Cap				Hex Nut 5/16-18 Thd.*
12	710-0946		Truss Mach. Scr. 1/4-20 x .62" Lg.	68	710-0654A		Grip
14	749-0439A		Upper Handle—Painted	69	712-0267		Height Adj. Lever
15	16129A		Panel Support Brkt.	70	720-0223		Extension Spring .75" O.D. x 8" Lg.
16	16862		Rear Catcher Panel Ass'y.	71	732-0606		Bell-Wash. 5/16" I.D.
17	17095		Rear Discharge Door	72	732-0362		Spacer
19	732-0483A		Torsion Spring	73	736-0242		Shld. Spacer .500" Dia.
20	747-0514		Pivot Pin	74	750-0736		Bolt Retainer 1/4 x .50" O.D.
21	710-0134		Carriage Bolt 1/4-20 x .62"*	75	750-0624		Instruction Label
22	710-0255		Truss Mach. Scr. 1/4-20 x 3/4" Lg.	77	726-0233		Control Label
23	710-0289		Hex Bolt 1/4-20 x .50" Lg.*	78	777-5902		Shld. Scr. .342" Dia. x .268
24	738-0704		Shoulder Bolt .312 Dia. x .18 Lg.—Special	79	777-5812		Pawl
25	710-0258		Hex Bolt 1/4-20 x .62" Lg.*	80	738-0137		Wheel Ass'y. Comp.
26	712-0287		Hex Nut 1/4-20 Thd.*	81	748-0188B		Clamp
27	736-0270		Bell-Wash. 1/4" I.D.	82	734-1510B		Bearing 1/2" I.D.
28	736-0329		L-Wash. 1/4" I.D.*	83	726-0175		Wire Harness
29	747-0705		Front Grass Catcher Frame	84	741-0486B		Plug
31	731-0906	N	S.P. Control Cover	85	725-—	1442	Panel Clip
32	735-0639		Spark Plug Insulator	86	725-1206		Flat Weld Nut 1/4-20 Thd.
33	712-0388		Wing Nut w/Washer	87	731-0880		Lower Battery Tray
34	746-0674		Throttle Control Wire 61"	88	712-0189		Upper Battery Tray
35	749-0725		Lower Handle—Painted	90	16542A		12 Volt Battery
36	—		Engine	91	731-0891		Key
38	764-0257		Grass Bag	92	725-1276		Key Switch
39	14835		Retaining Strip	93	725-0201		S.P. Cable 4/8" BLK
40	710-0323		Truss Mach. Scr. 5/16-18 x .75" Lg.	94	725-0873		"V"-Belt 30.60
41	736-0204		Fl-Wash. .344" I.D. x .62"	95	746-0710		Hex AB-Tap Scr. 1" Lg.
42	17055B	638	Chain—Axle Ass'y.	96	754-0343		Bag Handle
43	710-0352		Hex B-Tap Scr. 1/4" x .38" Lg.	97	710-0969		Battery Charger
44	741-0180		Flange Ball Bearing 1/2" I.D.	98	731-0801		21" Deck Ass'y.
45	710-0776A		Hex AB-Tap Scr. 1/4 x .62"	99	725-0727	638	Shld. Bolt .5" Dia. x .295
46	749-0778		Catcher Panel Support Arm	102	16859A		Bell-Wash. .515" I.D. x 1.0" O.D.
47	712-0296		Hex Patch L-Nut 3/8-24 Thd.	103	738-0234		Front Axle Ass'y.
48	713-0353		#48 Chain .500" Pitch x 30 Links	104	736-0253		Sleeve .526" I.D. x .690" O.D. x .880" Lg.
49	712-0346		Hex L-Nut 1/2-20 Thd.	105	16856		Intern. L-Wash. 3/8 I.D.*
50	731-0564		Plug	106	711-0313		Shld. Bolt .575" Dia. x .42
51	731-0672A		Rear Flap 3.75" x 17.30" Lg.	111	736-0221		Wheel Ass'y. Comp.
52	726-0240		Cable Tie	112	738-0705		Self-Propelled Control Cover
54	710-1025		Hex AB Scr. #12 x 1.25" Lg.	113	734-1513B		Self-Propelled Control Cover
55	753-0485		Blade Adapter Kit	114	731-0904	N	Control Lever
56	742-0306A		21" Blade	115	731-0905	N	Door Grip
58	736-0453		Bell-Wash. .46" I.D.	116	731-0620		
59	16863		Height Adj. Connecting Arm	117	720-0190		

Model 848E

PARTS LIST FOR MODEL 848E ROTARY MOWER (CONTINUED)

REF. NO.	PART NO.	CODE	DESCRIPTION	REF. NO.	PART NO.	CODE	DESCRIPTION
118	710-0841		Fl-"C"-Sunk Hd. Tap Scr. #10 x .75" Lg.	153	717-0417B		Transmission Comp. (See Breakdown)
119	16855		Pawl Plate	154	16500		Hex Bearing Cup
121	710-0671		Curved Carr. Bolt 5/16-18 x 1.38" Lg.	155	710-0429		Hex B-Tap Scr. #10 x .38
122	711-0805		Shld. Pin 3/8-24 x 1.43" Lg.	156	710-1055		Hex Scr. 3/8-24 x 1.0" Lg.
123	736-0169		L-Wash. 3/8" I.D.*	157	736-0169		L-Wash. 3/8" I.D.
129	746-0477A		Control Cable 43" Lg.	158	712-0241		Hex Nut 3/8-24 Thd.
130	748-0318		Ratchet Wheel 1.62" O.D.	160	736-0108		Fl-Wash. .51" I.D. x .75" O.D.
131	714-0115		Cotter Pin 1/8" Dia. x 1.00" Lg.*	161	749-0764A		Rear Catcher Frame
132	712-0711		Hex Jam Nut 3/8-24 Thd.	162	712-0266		Hex Jam Nut 3/8-16 Thd.
133	731-0884		Side Chute Deflector Ass'y.	163	713-0397		3 Tooth Rack Gear Insert
134	741-0522		Hex Flange Bearing	164	746-0706		Spd. Control Cable—50" Lg.
135	753-0430		Kit—Control Housing Comp.	165	731-0924		6-Spd. Shift Lever
136	10622B		Spring—Nylon	166	17070		Adjustable Cable Brkt.
138	17053A		Chain Cover	167	736-0270		Bell-Wash. .265" I.D. x .75" O.D.
140	710-0599		Hex Wash. S-Tap Scr 1/4-20 x .50" Lg.	168	712-0291		Hex Cent. L-Nut 1/4-20 Thd.
144	736-0300		Fl-Wash. .385" I.D. x .87"	169	714-0507		Cot-Pin 3/32" Dia. x .75" Lg.
147	738-0719A		Rear Shaft Ass'y. 21.54" Lg.	170	747-0684		Shift Rod
148	741-0324		Hex Flange Bearing .506" I.D. Plastic	171	741-0500		Movable Pulley Half Ass'y.
149	736-0160		Fl-Wash. .531" I.D. x .930"	172	710-0167		Carr. Bolt 1/4-20 x .50" Lg.
151	741-0491		Flanged Nyliner Brg.	173	756-0503		Spined Pulley Half
152	710-0751		Hex Bolt 1/4-20 x .62" Lg. (Grade 5)	174	731-1137		Flanged Bushing
				175	736-0278		Fl-Wash. .328" I.D. x .68" O.D.
				176	17073		Cable Mtg. Brkt. Ass'y.
				177	732-0627		Shift Lever Spring

*For faster service obtain standard nuts, bolts and washers locally. If these items cannot be obtained locally, order by part number and size as shown on parts list.

CODE: N notates a **new part** (not previously existing). A three digit number is the **color code**. Specify color code as shown below if color or finish is important when ordering parts. [i.e., (part no.)-638 for Red Finish].

Color Codes

456—Radiant Tangerine	629—Silver Flake
460—Green Flake	630—Metallic Blue
483—Charcoal Gray	637—Black
498—Yellow	638—Red
499—Beige	640—Green
621—Brilliant Fire Mist	646—CM Blue



NOTE



Specifications subject to change without notice or obligation.

NOTE: The engine is not under warranty by the mower manufacturer. If repairs or service is needed on the engine, please contact your nearest authorized engine service outlet. Check the "Yellow Pages" of your telephone book under "Engines—Gasoline."

Find It Fast
In The
Yellow Pages



Model 848E

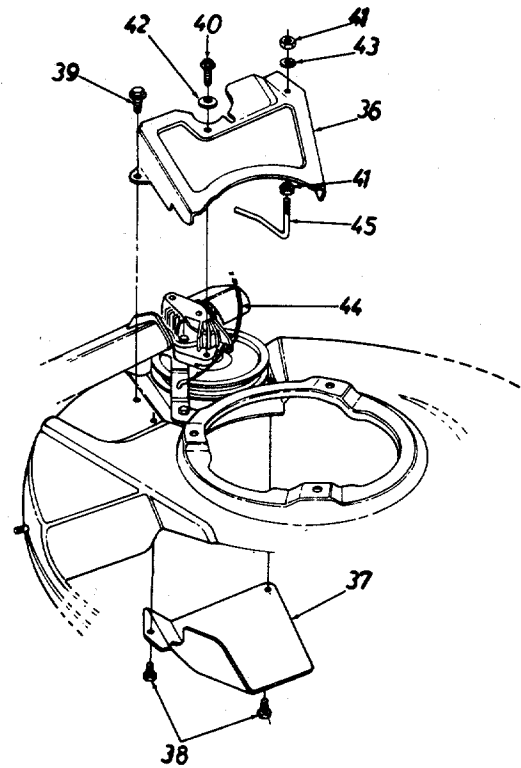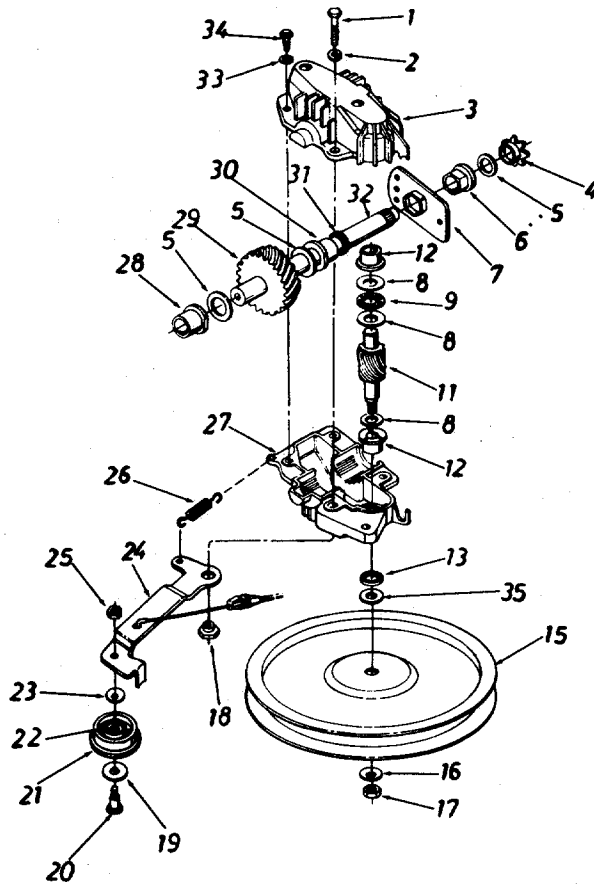

PARTS LIST FOR MODEL 848E ROTARY MOWER

EF. IO.	PART NO.	CODE	DESCRIPTION	REF. NO.	PART NO.	CODE	DESCRIPTION
1	710-1062		Hex Bolt 1/4-20 x 1.25" Lg.* w/Patch	24	17052A		Idler Brk't. Ass'y.†
2	726-0329		L-Wash. 1/4" I.D.*	25	712-0138		Hex Patch L-Nut 1/4-28 Thd.†
3	717-0418A		Upper Hsg. Half	26	732-0357		Extension Spring 1.12" Lg.†
4	713-0400		#48 Sprocket 7 Tooth x 1/2 Pitch	27	717-0419A		Lower Hsg. Half
5	736-0336		Fl-Wash. 5/8" I.D. x .030	28	741-0415		Flange Bearing .56 Dia.
6	741-0413		Hex Flange Brg. .631" I.D.	29	717-0422		33 Tooth Helical Gear
7	16500A		Hex Bearing Cup	30	741-0414		Flange Bearing .629 Dia.
8	736-0314		Thrust Wash. .382" I.D. x .70" O.D.	31	721-0213		Oil Seal .625 Dia.
9	741-0479		Thrust Bearing .375" I.D. x .812" O.D.	32	738-0607		Gear Sprocket Shaft
11	717-1216		11 Tooth Helical Gear	33	736-0722		L-Wash. #10 I.D.
12	748-0208A		Flange Bearing	34	710-0436		Hex B-Tap Scr. #10 x .62"
13	721-0212		Oil Seal	35	736-0410		Hex Washer .26" x .88"†
15	756-0330A		Fl-Pulley 5.06" I.D.†	36	17718		Transmission Belt Guard†
16	736-0270		Bell-Wash. .265" I.D. x .75"†	37	17064		Belt Cover
17	712-0351		Hex Nut 1/4-28 L.H. Thd.†	38	710-0352		Hex B-Tap Scr. 1/4 x .38" Lg.†
18	738-0440		Shld. Spacer .375" Dia. x .170"†	39	710-0599		Hex AB-Tap Scr. 1/4 x .50" Lg.†
19	736-0344		Fl-Wash. .390" I.D. x 1.0"†	40	710-0896		Hex B-Tap Scr. 1/4 x .62" Lg.
20	738-0826	N	Shld. Bolt .375" Dia. x .40"†	41	712-0287		Hex Nut 1/4-20 Thd.*†
	756-0558	N	Fl-Idler Plastic 1.50" Dia.†	42	736-0270		Bell-Wash. .265" I.D. x .75"†
	741-0556	N	Needle Brg. .375" x .31"†	43	736-0329		L-Wash. 1/4" I.D.*†
23	736-0270		Bell-Wash. .265" I.D. x .75"†	44	746-0710		S.P. Cable—48" Lg.†
				45	747-0549		S.P. Belt Guard†
				—	717-0417B	N	Transmission Comp.

Not Part of Transmission Complete

PART'S INFORMATION

POWER EQUIPMENT PARTS AND SERVICE

Parts and service are available through the authorized service firms listed below. All orders should specify the model number of your unit, part numbers, description of parts and the quantity of each part required.

NOTE: If any parts are found to be missing or defective upon assembly of this unit, write to advise the factory so that immediate replacement can be made.

ARKANSAS	NORTH LITTLE ROCK	NORTH CAROLINA	BROWNS SUMMIT
Sutton's Lawn Mower Shop.....	5301 Roundtop Drive Box 368, Rt. 4 72117	Dixie Sales Company	5920 Summit Ave. 27214
CALIFORNIA	PORTERVILLE	OHIO	CARROLL
Billious	75 North D Street 93257	Stebe's Mid-State Mower Supply	Box 366, 71 High St. ... 43112
COLORADO	DENVER	Bleckrie, Inc.	CLEVELAND
Spitzer Industrial Products Co. ...	6601 N. Washington St. 80229	National Central	7900 Lorain Ave. 44102
FLORIDA	JACKSONVILLE	Burton Supply Co.	WADSWORTH
Radco Distributors	4909 Victor St. Box 5459 32207	PENNSYLVANIA	687 Seville Rd. 44281
Small Eng. Dist.	HIALEAH	EECO Inc.	YOUNGSTOWN
ILLINOIS	7995 W. 26th Court ... 33016	Bluemont Co.	1301 Logan Ave. Box 929 44501
Keen Edge Co.	LYONS	Frank Roberts & Sons	HARRISBURG
INDIANA	8615 Ogden Ave. 60534	Scranton Auto Ignition Co.	4021 N. 6th St. 17110
Parts & Sales Inc.	ELKHART	TENNESSEE	PITTSBURGH
IOWA	2101 Industrial Pkwy. Box 277 46516	Ace Distributors	11101 Frankstown Rd. . 15235
Power Lawn & Garden Equip.	DUBUQUE	Chilton Air Cooled Engine	PUNXSUTAWNEY
MARYLAND	2551 J.F. Kennedy. 52001	TEXAS	R.D. 2 15767
Center Supply Co.	BELTSVILLE	Marr Brothers, Inc.	SCRANTON
MASSACHUSETTS	6802 Industrial Dr. #208 20705	UTAH	1133-35 Wyoming Ave. . 18509
Morton B. Collins Co.	SPRINGFIELD	Powered Products	KNOXVILLE
MICHIGAN	300 Birnie Ave. 01107	VIRGINIA	2103 Magnolia 37917
Power Equipment Dist.	MOUNT CLEMENS	RBI Corp.	NASHVILLE
MINNESOTA	340 Hubbard 48043	WASHINGTON	319 4th Ave. S. 37210
Hance Distributing Inc.	PLYMOUTH	Equip. Northwest	DALLAS
MISSOURI	12795 16th Ave. North . 55441	WISCONSIN	423 E. Jefferson. 7520
Oscar Wilson Engine & Parts	EARTH CITY	Wisconsin Magneto Inc.	SALT LAKE CITY
Automotive Equip. Service	4159 Shoreline Dr. 63045	PUERTO RICO	1661 N. Beck St. 84116
NEW YORK	KANSAS CITY	Island Distribution Center	ASHLAND
Gamble Dist., Inc.	3117 Holmes St. 64109	RAMEY	101 Cedar Ridge Dr. ... 23005
NEW YORK	CARTHAGE		SEATTLE
	West End Ave. Box 389 13619		1410 14th Ave. 98122
			MILWAUKEE
			4727 N. Teutonia St. ... 53209
			MILWAUKEE
			4727 N. Teutonia St. ... 53209
			RAMEY
			102 N. St. 00604

WARRANTY PARTS AND SERVICE POLICY

(0689)

The purpose of warranty is to protect the customer from defects in workmanship and materials, defects which are NOT detected at the time of manufacture. It does not provide for the unlimited and unrestricted replacement of parts. Use and maintenance are the responsibility of the customer. The manufacturer cannot assume responsibility for conditions over which it has no control. Simply put, if it's the manufacturer's fault, it's the manufacturer's responsibility; if it's the customer's fault, it's the customer's responsibility.

CLAIMS AGAINST THE MANUFACTURER'S WARRANTY INCLUDES:

1. Replacement of Missing Parts on new equipment.
2. Replacement of Defective Parts within the warranty period.
3. Repair of Defects within the warranty period.

All claims MUST be substantiated with the following information:

1. Model Number, Serial Number and/or Date Code of unit involved.
2. Date unit was purchased.
3. Date of Failure.
4. Nature of Failure.

MTD PRODUCTS INC • P.O. BOX 360900 • CLEVELAND, OHIO 44136

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>